CXC Data Processing Tools for ACIS

Revision 2.1

Glenn E. Allen
Chandra X-ray Center
Science Data Systems

February 28, 2000

Contents

1 Preamble **iii**

1.1 Document and Change Control Log . . . iii

1.2 Applicable Documents . . . iii

2 Tool Summaries **1**

2.1 Level 1 Tools . . . 1

2.2 Level 2 Tools . . . 1

3 Tool Descriptions **3**

3.1 Level 0.5 Tool . . . 3

acis_collate_events . . . 3

3.2 Level 1 Tools . . . 5

acis_format_events . . . 5

acis_correct_bias . . . 11

acis_process_events . . . 13

acis_grade_events . . . 22

acis_calc_pi . . . 26

acis_build_mask . . . 28

acis_build_badpix . . . 30

3.3 Level 2 Tools . . . 32

acis_filter_events . . . 32

acis_bin_events . . . 34

acis_extract_spectrum . . . 36

acis_extract_image . . . 38

acis_extract_lightcurve . . . 40

1 Preamble

1.1 Document and Change Control Log

Date	Version	Tool(s)	Status
27 April 1998	1.0	...	First Release
29 Sept 1998	1.1	acis_format_events, acis_correct_bias, acis_process_events, acis_grade_events, acis_calc_pi	improved description of bias subtraction; revised CTI and event ENERGY, PI descriptions
07 April 1999	1.2	acis_format_events, acis_correct_bias, acis_process_events, acis_grade_events	added references to CC 3x3 modes; added references to ACIS flight SRR requirements for bias subtraction; clarified PHAS summation rules; updated descriptions of tool parameters; updated status bit descriptions
01 November 1999	2.0	acis_process_events, acis_calc_pi	changed algorithm to compute ENERGY and PI from PHA
25 February 2000	2.1	acis_build_badpix, acis_process_events	updated for new badpix ARD format

1.2 Applicable Documents

1. ACIS Data Products:
   Level 0 to CXC Archive Interface Control Document
   `link on http://space.mit.edu/ASC/docs/docs.html`

2. ACIS Data Products:
   Level 1 to CXC Archive Interface Control Document
   `link on http://space.mit.edu/ASC/docs/docs.html`

3. Analysis Reference Data ICD for:
   ACIS Level 1 & 2 Pipelines and Tools
   `link on http://space.mit.edu/ASC/docs/docs.html`

4. ACIS Flight Software Requirements Specification, Rev. J
   `http://acis.mit.edu/acis/sreqj`

2 Tool Summaries

2.1 Level 1 Tools

acis_format_events For ACIS data obtained in faint event modes (TE faint, very faint, and faint with bias; CC faint), subtract bias and overclock from pixel pulse heights (ADU). For event data in either faint or graded modes, output ACIS exposure statistics table. Set various event status bits. Prepare event formats for further processing by acis_process_events.

acis_correct_bias For ACIS data obtained in faint event modes (TE faint, very faint, and faint with bias; CC faint), subtract bias and overclock from pixel pulse heights (ADU).

acis_process_events Perform calculations and corrections on ACIS event attributes. Correct event PHA for charge transfer inefficiency (optional); grade ACIS events according to split geometry; sum PHA of pixels above split threshold, according to relevant grading system; convert pulse height amplitudes (PHA) in ADU to pulse-invariant (PI) values in eV; convert chip coordinates to detector and sky coordinates. Set various event status bits.

acis_grade_events Grade ACIS events according to split geometry; sum PHA of pixels above split threshold, according to relevant grading system. Optionally, correct event PHA for charge transfer inefficiency (CTI) prior to grade (re-)determination and PHA summation.

acis_calc_pi Apply node-by-node gain coefficient table to convert pulse height amplitudes (PHA) in ADU to pulse-invariant (PI) values in eV.

acis_build_badpix Build bad pixel and column list file (single-CCD-specific), for later use in exposure map (and other processes TBD). List is created from archived and telemetered Bad Pixel (Column) Maps and any bias parity errors as reported in the science run Bias Error file for each CCD.

acis_build_mask Build spatial/PHA/event sampling mask for later use in exposure map (and other processes TBD). Mask is created from windows lists used by ACIS backend processors (BEPs) in accepting and rejecting events.

acis_build_evtsummary Summarize results of a science run and/or OBI (i.e., Level 1 output) in format suitable for presentation to observer. Output includes ACIS setup summary, exposure statistics, event statistics, and per-CCD PHA grade splits, PHA histograms, etc. (TBR)

acis_format_hist For histogram mode data, add observation-specific keywords and make format compliant with XSPEC and ASCFIT requirements. (TBR)

acis_format_raw For data obtained in raw mode, find events and produce event list suitable for input to acis_format_events. (Mimics flight software processing steps for faint mode data.) (TBR)

2.2 Level 2 Tools

acis_filter_events Select ACIS events according to any or all available event attributes; in particular, select on event grade, position, energy, and status. Optionally, write output file of selected (filtered) events. Special-purpose wrapper for data_copy.

acis_bin_events Bin ACIS events into (1-D or 2-D) histogram. This is a general-purpose binning tool that serves as the core of special-purpose tools such as acis_extract_spectrum, yet is more specific in its function than data_bin_photons (around which it wraps).

acis_extract_spectrum Bin (appropriately filtered) ACIS events into PHA or PI histogram, and (optionally) calculate exposure time and effective area for selected parameter space.

acis_extract_image Bin (appropriately filtered) ACIS events into image, and (optionally) calculate exposure time and effective area for selected parameter space.

acis_extract_lightcurve Bin (appropriately filtered) ACIS events into light curve, and (optionally) calculate exposure time and effective area for selected parameter space.

acis_calc_splitratios Bin (appropriately filtered) ACIS events according to event grade, to find event split branching ratios.

acis_calc_pileupfrac Based on source count rate, estimate pileup fraction.

da_calc_hardness Calculate ACIS hardness ratios (definitions TBD) for a given source photon list or PHA (PI) histogram.

3 Tool Descriptions

3.1 Level 0.5 Tool

acis_collate_events

Description: For events obtained in "alternating" (aka "interleaved") exposure time TE (timed exposure) mode, collate Level 0 event list(s) and exposure records file(s) into 2 files each. Divisions of events and exposure records are made according to exposure time.

Parameters:

Inputs:

```
Level 0 parameter block file (*_pbk.fits)
Level 0 event list, 1 per active CCD
  (*_f_evt0.fits, where f is FEP number)
Level 0 exposure record file, 1 per active CCD
  (*_f_exr0.fits, where f is FEP number)
```

Outputs:

```
Level 0.5 event lists, 1 per exp time
  (*_A_evt0a.fits, *_B_evt0a.fits)
Level 0.5 exp record files, 1 per exp time
  (*_A_exr0a.fits, *_B_exr0a.fits)
```

Processing:

1. Open parameter block file for the science run. If value of DTYCYCLE keyword is nonzero (meaning that both primary *and* secondary exposure times are present in event list) then proceed with the following steps. If DTYCYCLE = 0 then no event or exposure collation is required, and steps below are not taken.

2. Open two output exposure records files, one for each exposure time (contained in parameter block keywords EXPTIMEA and EXPTIMEB). Set CYCLE keyword to reflect exposure time, e.g.:

   ```
   CYCLE   = 'P'       / events are from which exps? P[rimary]/S[econdary]/B[oth]
   ```

   where CYCLE='P' corresponds to EXPTIMEA and CYCLE='S' corresponds to EXPTIMEB.

3. Repeat preceding step, for the two output events files.

4. For each exposure record in each of the (up to six) exposure record files of the science run:

   (a) Use EXPNO to establish expected exposure time[1], based on values of parameter block keywords DTYCYCLE, EXPTIMEA, and EXPTIMEB:

   - If EXPNO = (1 + DTYCYCLE)$\times N$ ($N = 0, 1, 2, ...$) then exposure time is EXPTIMEA.
   - Otherwise, exposure time is EXPTIMEB.

[1] Need to establish whether first exposure has EXPNO value of 0 or 1.

(b) Check expected value of exposure time for exposure record against value of `EXPTIME` column of same record (should match, or there's a problem somewhere).

(c) Output exposure record to corresponding exposure records file.

5. For each event record in each of the (up to six) event files of the science run:

(a) Use `EXPNO` to establish expected exposure time, based on values of parameter block keywords `DTYCYCLE`, `EXPTIMEA`, and `EXPTIMEB`:

- If `EXPNO` = (1 + `DTYCYCLE`)$\times N$ ($N = 0, 1, 2, ...$) then exposure time is `EXPTIMEA`.
- Otherwise, exposure time associated with event is `EXPTIMEB`.

(b) Output event record to corresponding events file.

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: acis/spec/spec20XX

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

3.2 Level 1 Tools

acis_format_events

Description: For ACIS data obtained in faint event modes (TE faint, very faint, and faint with bias; CC faint), subtract bias and overclock from pixel pulse heights (ADU). For event data in either faint or graded modes, output ACIS exposure statistics table. Set various event status bits. Prepare event formats for further processing by acis_process_events.

Parameters:

```
valid overclock (OC) ranges
various processing flags (see appendix to ‘‘Processing’’, below)
```

Inputs:

```
event data
  3x3 or 1x3 pixel ADU values (faint modes only)
  3x3 bias values (TE faint w/ bias only)
  chipx,y of central pixel (CC: chipx only)
  exposure number
  time
  CCD ID
  PHA (graded modes only)
bad pixel map
bias map (N/A for TE faint w/ bias mode)
exposure record data
  initial overclock values
  exposure number
  delta OC values
  # pixels above threshold
  # events telemetered
```

Outputs:

```
bias/OC-corrected event data
status bits
updated bias map (TE faint w/ bias only)
updated MTL file
exposure statistics table
```

Processing:

1. Determine ACIS mode (one of TE faint, TE very faint, TE faint with bias, CC faint, or CC 3x3 faint)
2. Read event, bias (if nec.), bad pixel, and exposure record data.
3. For each active CCD, loop over events:
   (a) Subtract pixel-by-pixel bias and node- and exposure-specific overclock (tool: acis_correct_bias), according to the algorithm defined in §3.2.2.3.14 (TE faint, TE very faint, TE faint with

bias, CC 3x3 faint) or §3.2.3.3.12 (CC faint) of Rev I of the ACIS Flight Software Requirements Specification,
`http://acis.mit.edu/acis/sreqi`.

(b) Update exposure statistics table using data (e.g., events telemetered and pixels above threshold) from exposure record file.

4. Merge (up to 6) time-ordered CCD-specific event lists output by L0 into a single, time-ordered event list for all CCDs.

Appendix A: Design Description (W. McLaughlin, 3/25/97)

```
main
  |_ evtfntformat
       |_ parse_acis_evt_columns
       |_ determine_acis_mode  (A)
       |_ load_bias_image (A)
       |_ open_exposure_file  (A)
       |_ evtfnt_dependency_check
       |_ keep_input_file_axes  (A)
       |_ open_mtl_file  (M)
       |_ open_cntrt_file  (C)
       |_ load_event_data  (A)
       |_ process_mtl_update  (M)
       |_ bias_correct
       |    |_set_bias_map_status_bits
       |
       |_ faint_bias_extraction
       |    |_ check_file_existance  (A)
       |
       |_ load_cntrt_buffer  (C)
       |_ write_cntrt_update  (C)
       |_ load_exposure_column  (A)
       |_ apply_oc_corrections
       |_ write_acis_events  (A)
       |_ evtfnt_log_errors


EVTFNDFORMAT()
BEGIN
   get parameters
   set up stacks
   IF (size of input and bias stacks differ) THEN
      WHILE {input stack not null} LOOP
         IF {no error opening input file} THEN
            set up input file column masks
            IF {no error opening bias file}  THEN
               allocate memory for bias table
               load bias table
               IF {output file not set up} THEN
                  IF {no errors opening output file} THEN
```

```
                  setup output file
               ELSE
                  add err mask to status flag (out open err)
               ENDIF
            ENDIF
            close bias file
         ELSE
            add err mask to status flag (bias open err)
         ENDIF
      ELSE
         add err mask to status flag (input file open err)
      ENDIF

      IF {no errors encountered} THEN
         WHILE { not all events processed} LOOP
            load event
            bias adjust event
            overclock correct event
            write out event
         ENDWHILE
      ENDIF
      close input file
    ENDWHILE
    close output file
  ELSE
    add err mask to status flag (diff size stacks)
  ENDIF
END.
```

Appendix B: Description of Parameters (from help file in release as of 2/11/99)

```
    infile     - (existing fits bin table or qpoe event file)
               - this is an auto parameter that is used to specify the input
                 event file from which acis_format_events will process data.

    biasfile   - (a fits image file name or blank)
               - This is a fits image file which is 1024x1024 pixels. It is
                 used to bias correct data. Left blank for graded modes or
                 faint w/ bias mode. A file name for faint te, very faint,
                 or faint w/ bias (optional)

    exrfile    - (existing fits file corresponding to input event file)
               - This file corresponds to the event file and contains among
                 other data, the overclock values to use when applying
                 overclock corrections.

    outfile    - (nonexistent fits bin table or qpoe event file)
```

```
            - this is an auto parameter that is used to specify where the
              processed events are to be written.

badpixfile - (a fits file or NONE)
            - this file whose format is TBD is used to set status bits to
              indicate missing or bad pixels in the event list.

outbias    - (nonexistent fits image file)
            - this value is used as the suffix of the name of the output
              bias map created for faint w/ bias mode data.

expstatsfile   - (nonexistent fits file)
            - this value specifies the name of the output exposure
              statistic stable created by acis_format_events. The file
              also contains the dropped exposures extensions.

logfile    - (nonexistent text file or 'stdout')
            - This value specifies the name of the ascii text file
              which acis_format_events will generate if the verbose param
              (see below) is set to a value other than 0. If the value is
              set to "stdout", the output will be redirected to standard
              output (typically the screen)

eventdef   - (output format or redirect to pre-existing output format)
            - This field allows the user to specify the contents of
              the input file. The value may either be set to a desired list
              of columns and data types by the user, or a redirect to
              predefined event definitions may be utilized via the redirect
              command.

bias_correct - (yes, no)
            - This parameter serves as a flag to instruct
              acis_format_events as to whether or not it should perform
              bias corrections.

oc_correct - (yes, no)
            - This flag allows the user to specify whether or not overclock
              corrections are applied to the events.

min_init_oc - (integer 0..500)
            - This value identifies the minimum acceptable value for an
              initial overclock.

max_init_oc - (integer 0..500)
            - This value identifies the maximum accpetable value for an
              initial oveclock.

min_dlta_oc - (integer -250..250)
            - the minimum acceptable delta overclock value is specified by
              this value. If an exposure file entry's delta overclock values
              fall below this value a status bit is set in the respective
```

```
            event.

max_dlta_oc - (integer -250..250)
           - the maximum acceptable delta overclock value is specified by
             this value. If an exposure file entry's delta overclock values
             are above this value a status bit is set in the respective
             event.

qp_internals - (yes, no, redirect to qpoe.par file)
           - This boolean parameter instructs acis_format_events whether
             or not to use the the page and bucket length values specified
             in the input file or to use the default values.

qp_pagesize - (integer or redirect to qpoe.par file)
           - allows the user to specify the qpoe page size

qp_bucketlen - (integer or redirect to qpoe.par file)
           - allows the user to specify the qpoe bucket length

tempbias   - (yes, no)
           - This flag is a temporary work around which causes
             acis_format_events to perform a simple bias correction
             algorithm if bias maps are unavailable.

clobber    - (yes, no)
           - This parameter instructs acis_format_events to remove an
             already existing file so that a new bias map file may be
             created with the same name- in effect 'overwriting' or
             'clobbering' the previous output file. (This function
             is currently only supprted for output bias maps.)

telev1     - (output event definition string)
           - This event definition specifies the default output columns
             that will be written to the output file if the eventdef
             variable is redirected here.

vflev1     - (output event definition string)
           - This event definition specifies the default output columns
             that will be written to the output file if the eventdef
             variable is redirected here. It is primarilly intended from
             use with very faint mode data (ie. 5x5 mode data).

cclev1     - (output event definition string)
           - This event definition specifies the default output columns tha
             will be written to the output file if the eventdef variable is
             redirected here. It is primarily intended for coninous
             clocking mode data.

verbose    - (0..5)
           - Option which allows the user to request a varying level of
             textual output based upon the program execution. Levels range
```

```
from 0 to 5 with 0 representing no information and 5
representing as detailed a log as possible. the log is written
out to the directory the function was invoked from, and is
named 'runlog'.
```

Release: 4

Group: DA

Analysis Domain: Event

DS Tool Class: 3

DS Tool Category: Correction

Spec Name: spec78

Spec Category: Correction

Code Type: ASCDS

Code Source: ASC

acis_correct_bias

Description: For ACIS data obtained in faint event modes (TE faint, very faint, and faint with bias; CC faint), correct pixel pulse heights (ADU) for bias and overclock.

Parameters:

```
valid overclock (OC) ranges
```

Inputs:

```
event data
  3x3 or 1x3 pixel ADU values (faint modes only)
  3x3 bias values (TE faint w/ bias only)
  chipx,y of central pixel (CC: chipx only)
  exposure number
  time
  CCD ID
  PHA (graded modes only)
bad pixel map
bias map (N/A for TE faint w/ bias mode)
exposure record data
  initial overclock values
  exposure number
  delta OC values
  # pixels above threshold
  # events telemetered
```

Outputs:

```
bias/OC-corrected event data
updated bias map (TE faint w/ bias only)
```

Processing: Correct for bias and overclock according to the algorithm defined in §3.2.2.3.14 (TE faint, TE very faint, TE faint with bias, CC 3x3 faint) or §3.2.3.3.12 (CC faint) of Rev I of the ACIS Flight Software Requirements Specification, `http://acis.mit.edu/acis/sreqi`, i.e.,
`Corrected Pixel PH = raw pixel PH - pixel bias map value - (overclock - initial_overclock)`

1. Make correspondence between event pixel ADU values and appropriate bias values, and correct event pixel ADU for bias (i.e. subtract bias ADU from event ADU on pixel-by-pixel basis). `[Faint with bias only: update ‘‘real-time’’ bias map.]`
2. Subtract overclock (OC) from event pixel ADU. OC is a single, per-exposure value for each CCD node, consisting of initial OC (OC value at start of science run) + delta OC (exposure-by-exposure change in OC); both initial and delta OC's are found in the exposure record (*_exr.fits) files output by L0. *For events that lie at node edges, special care must be taken in applying OC values for the appropriate node for each pixel.*

Release: 4

Group: DA

Analysis Domain: Event

DS Tool Class: 3

DS Tool Category: Correction

Spec Name: spec22

Spec Category: Correction

Code Type: ASCDS

Code Source: ASC

acis_process_events

Description: Perform calculations and corrections on ACIS event attributes. Sum and grade events (see acis_grade_events); convert chip coordinates to detector and sky coordinates; convert pulse height amplitudes (PHA) in ADU to pulse-invariant (PI) values in eV. (Optionally, also correct event PHA for charge transfer inefficiency [CTI].)

Parameters:

```
grading scheme (flight bitmap to ASCA/ACIS)
split thresholds
various processing flags (see appendix to ``Processing'', below)
```

Inputs:

```
event list (output of acis_format_events)
ACIS detector geometry
dither (aspect) history
gain table or response matrix
```

Outputs:

```
Updated event list (w/ grades, det/tdet/world coords, PI)
Event Log
```

Processing:

1. Grade event and sum event pixel PHA; optionally, correct PHA for CTI (under study). See description of tool acis_grade_events.

2. Calculate ENERGY and PI from event PHA based on CCD gain. See description of tool acis_calc_pi.

3. Calculate tiled detector and detector coordinates: receive the graded and summed event list, with event location in chip coordinates. Apply the chip to tiled detector coordinate transformation for each event. Randomize coordinates by adding a uniform, random offset of between -0.5 and $+0.5$ pixels to CHIPX and CHIPY, and apply the chip to detector coordinate transformation for each event. (For CC mode events, CHIPY is set to 512 prior to determining detector coordinates.) Write the resulting tiled detector and detector coordinates to the event list.

4. Calculate world (celestial) coordinates: apply aspect solution to transform the event local maximum position from detector coordinates to world coordinates.

5. Set event status bits (see Appendix below; most status bits are set in the preprocessor tool acis_format_events).

6. Write updated event record to event list.

All necessary processing information (including debugging if desired) is recorded to the events log.

Appendix A: Design Description (W. McLaughlin, 3/24/97)

```
 A calling tree of the evtacisdet tool is listed below... The detailed design
 of each of the routines listed in the tree is also provided.

Note: several of the routines listed below are actually used by several level
      1 acis tools and have therefore been moved into a separate library
      (acisio lib). They are designated by a (A) after the function name.

main
  |_ evtacisdet
       |_ read_instrume_params (A)
       |_ parse_coord_range
       |_ map_start_column
       |_ verify_scheme_request
       |_ load_short_key_value (A)
       |_ set_grating_type
       |_ load_double_key_value (A)
       |_ parse_acis_evt_columns (A)
       |_ determine_acis_mode (A)
       |_ determine_island_size (A)
       |_ dependency_check_acis
       |_ set_up_mirror
       |_ setup_output_axes
       |_ write_instrume_params (A)
       |_ setup_focal_length (A)
       |_ get_predicted_beam_position
       |_ load_event_data (A)
       |_ dither_update
       |    |_ open_dither_file
       |    |    |_ map_table_column
       |    |    |_ dither_file_dependencies
       |    |
       |    |_ load_dither_entry
       |    |_ close_dither_file
       |
       |_ process_grades_acis
       |    |_ sum_grade_event
       |    |_ find_acis_grade
       |    |_ find_asca_grade
       |
       |_ calculate_coords_acis
       |    |_ calc_chip_coords
       |    |    |_ calculate_centroid
       |    |
       |    |_ calc_sky_coords
       |    |_ calc_tan_coords
       |    |_ calc_det_coords
       |
       |_ write_acis_events (A)
```

```
  |_ log_warning_stats
  |_ make_wcs_updates
  |_ log_error_stats
```

Appendix B: Description of Parameters (from help file in release as of 2/11/99)

```
infile     - (existing event file/stack - either qpoe or fits)
           - this is an auto parameter that is used to specify the input
             event file from which acis_process_events will process data.
             If the file is in fits format, the actual event information
             must be in an extension named 'EVENTS'. Additional items
             are extracted from keywords in the primary and EVENTS
             extensions.

outfile    - (nonexistent event file- either qpoe or fits)
           - this is an auto parameter that is used to specify where the
             processed events are to be written.

acaofffile - (existing  .FITS file or NONE)
           -  offset file used to compensate for spacecraft movements
             during an observation

alignmentfile - (existing alignment .FITS file or NONE)
           - this is an auto parameter which is used to provide the tool
             with values used to adjust the mirror position via sim
             alignment (flight) or dither (xrcf) values.

logfile    - (nonexistent text file or 'stdout')
           - This value specifies the name of the ASCII text file
             which acis_process_events will generate if the verbose param
             (see below) is set to a value other than 0. If the value is
             set to "stdout", the output will be redirected to standard
             output (typically the screen)

obsfile    - (existing observation parameter .PAR file or NONE)
           - This value specifies the name of the observation parameter
             file to seed the output event file header with. If the value
             is not "NONE", the keywords from the specified file are
             copied to the output file's header.

gainfile   - (existing gain correction .FITS file or NONE)
           - This value specifies the name of the gain correction file
             to use when calculating pi/performing gain correction. The
             calculate_pi parameter (see below) must be set to perform
             gain correction.
```

```
gradefile  - (existing grade .FITS file or NONE)
           - This value specifies the name of the grading file to use to
             perform grading. The file is also used to determine how to
             sum corner pixels for event pulse height summations.

threshfile - (.FITS file or NONE)
          - This optional parameter specifies the name of the file to use
            to specify ccdid and ccd node specific split threshold values.
            If set to 'NONE' the value specified in the spthresh parameter
            (see below) is used as the default value for all ccds.

eventdef   - (output format or redirect to pre-existing output format)
           - This field allows the user to specify the contents of
             the input file. The value may either be set to a desired list
             of columns and data types by the user, or a redirect to
             predefined event definitions may be utilized via the redirect
             command.

doevtgrade - (yes, no)
           - option to calculate and output the flight grade and
             and pulse height sum of events in the input qpoe file.

spthresh   - (0..32767)
           - the user defined split threshold value used in determining
             centroid calculations as well as flight grade and pulse
             height sum values. (This is the default threshold value
             which is used if the threshfile parameter (see above) is
             set to 'NONE').

time_offset - (real number)
           - offset which needs to be added to the event file to synch
             it up with the alignment data.

docentroid - (yes, no)
           - option to adjust the location of the local maxima based
             upon weighted values of surrounding pixel pulse heights above
             a threshold value.

calculate_pi - (yes, no)
           - option to calculate pi/perform gain correction based on the
             values in the gain file (see above) which must also be
             provided. The computed pulse invariance is only written to
             the output event file if it is specified in the output file's
             eventdef ('f:energy,s:pi').

pi_bin_width - (1..1000)
           - This value specifies the scale in eV for the pi column units.

pi_num_bins - (256..32767)
           - This value specifies the range of the pi column. Each unit
             in the range represents a range of pi_bin_width (see above)
```

```
             eV.

randompha  - (yes, no)
           - This parameter determines whether a random offset is added
             to the integer PHA values of the events.

tstart     - (TSTART or some other keyword name)
           - The name of the header keyword containing the time of the
             first event in this file. It is used as the lowerbound of
             a temporal filter on the event file

tstop     - (TSTOP or some other keyword name)
           - The name of the header keyword containing the time of the
             last event in this file. It is used as the upperbound of
             a temporal filter on the event file

qp_internals - (yes, no, redirect to qpoe.par file)
           - This boolean parameter instructs acis_process_events whether
             or not to use the the page and bucket length values specified
             in the input file or to use the default values.

qp_pagesize - (integer or redirect to qpoe.par file)
           - allows the user to specify the qpoe page size

qp_bucketlen - (integer or redirect to qpoe.par file)
           - allows the user to specify the qpoe bucket length

verbose    - (0..5)
           - Option which allows the user to request a varying level of
             textual output based upon the program execution. Levels range
             from 0 to 5 with 0 representing no information and 5
             representing as detailed a log as possible. the log is written
             out to the directory the function was invoked from, and is
             named 'runlog'.

stop       - (chip, tdet, det, sky)
           - The end of the coordinate transformations. This determines
             the extent of the coordinate transformations that are
             executed by acis_process_events. It should generally be set
             to sky.

instrume   - (acis)
           - This specifies the instrument that the data was collected
             with. It should be set to acis.

telescop   - (name of telescope parameter file or blank)
           - This tells what telescope parameter file to utilize

random     - (yes, no)
           - This parameter controls whether a randomization factor is
             added into coordinates when they are written out to
```

```
              compensate for any aliasing which may occur due to
              float to integer truncation.

rand_seed   - (0 or positive value)
            - This value specifies the random seed which is to be applied
              to randomizations. A value of 0 causes the code to utilize a
              time based pseudo-random seed. A non-zero value should
              produce identical results on multiple runs of the same data.

stdlev1     - (output event definition string)
            - This event definition specifies the default output columns
              that will be written to the output file if the eventdef
              variable is redirected here.

cclev1      - (output event definition string)
            - This event definition specifies the default output columns tha
              will be written to the output file if the eventdef variable is
              redirected here. It is primarily intended for continuous
              clocking mode data.
```

Appendix C: Event Status Bits

(Adapted from a summary by W. McLaughlin, 3/25/97)

Bits 1–3 are set by acis_process_events. Bits 4, 6–10, and 12–14 are set by acis_format_events. Bits 0, 5, and 11 are not implemented as of 8/97.

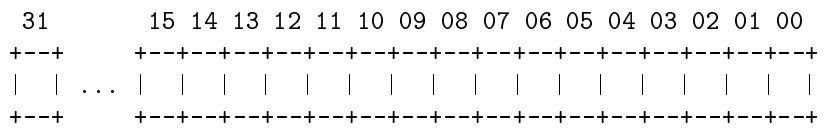

STATUS	MASK VALUE
L1_STS_GOOD_EVENT	0x0000
L1_STS_BAD_POS	0x0001
L1_STS_LM_BAD_VAL	0x0002
L1_STS_PIX_RANGE	0x0004
L1_STS_BAD_SUM	0x0008
L1_STS_LM_BAD_PIX	0x0010
L1_STS_ADJ_BAD_PIX	0x0020
L1_STS_BIAS_BAD_PIX	0x0040
L1_STS_BIAS_MISSING	0x0080
L1_STS_BIAS_PARITY	0x0100
L1_STS_OC_MISSING	0x0200
L1_STS_OC_RANGE	0x0400

```
L1_STS_CM_LOW                0x0800
L1_STS_CM_1_MISSING          0x1000
L1_STS_CM_2_MISSING          0x2000
L1_STS_CM_3_MISSING          0x3000
L1_STS_CM_4_MISSING          0x4000
```

EVENT POSITION

- 00 - This bit is set to 1 if the chip coordinates of an event are outside of the valid region. For example, this condition may be due to windowing, active-inactive CCDs, or the FEP0 problem.

PULSE HEIGHTS

- 01 - This bit is used to flag events in which the center pixel of the 3x3 event island does not contain the local maximum (highest PHA value in the island) or which have center pixel PHA values that fall below split threshold. These pixels, and/or side and corner pixels that equal or exceed both the center pixel and split threshold, are included in total event PHA.

- 02 - This bit is set to 1 for any event which has one or more of its individual island pixels > 4095 after correction for overclock and bias.

- 03 - This bit is set to 1 to announce the detection of an overflow condition in the summing of event island columns. Since 'pha' (sum of event island pulse heights) have a range from 0-36855 and the pha category can only handle short integers (numbers up to 32767), this bit will flag events which exceed the limit. In addition, the 'pha' sum of such an event will be set to the default value of 32767.

BAD PIXELS

- 04 - This bit is set to 1 if the local maximum of an event occurs on a pixel that is identified as being bad. This condition includes bad pixels and columns, pixels along the outer edge of a chip, and pixels along the mid-chip node boundaries (i.e. CHIPX = 512 or 513). If the DATAMODE of an observation is VFAINT, the pixels immediately adjacent to the chip edges (but not the mid-chip node boundaries) also have this bit set to 1.

- 05 - This bit is set to 1 if the local maximum of an event occurs on a pixel that is immediately adjacent (horizontally, vertically, or diagonally) to a pixel that is identified as being bad. If the DATAMODE of an observation is VFAINT, the pixels immediately adjacent to the central 3x3 event island also have this bit set to 1. These pixels are not included in total event PHA.

BAD BIAS

- 06 - This pixel flags events which have bad bias map values. The flag is set when bias values are set to 4095 by the onboard software.

```
          These pixels are not included in total event PHA.

   - 07 - This bit position indicates missing or unknown bias values for an
          event pixel.  This bit is set due to situations such as telemetry
          dropout.  These pixels are not included in total event PHA.

   - 08 - Parity errors are recorded for events by setting this bit to 1.
          The bit is set when the onboard software returns a bias value of
          4094.  These pixels are not included in total event PHA.

BAD OVERCLOCK VALUES
   - 09 - This bit is set for events for which overclock information is
          missing or does not exist.

   - 10 - Setting this status bit to 1 indicates that the corresponding event's
          overclock values fall outside of a specified range (nominal case
          0 <= oc_val <= 500)

BAD CORNER MEAN (GRADED MODE ONLY)
   - 11 - corner mean below -4095
          This bit is used to flag events where the onboard software has set
          the corner mean value to -4096 to indicate an extremely low corner
          mean value (see ECO 36-946).

   - 12/13 - used to indicate the number of corners missing from the corner
          mean (i.e. bit pattern 01=1 missing, 10=2 missing, and 11=3 missing
          corners).  These bits will be set based on the results of checking
          the bad pixel and bad bias values of the corners surrounding the
          center position of graded mode data.  These bits tell the number
          of corners missing but do not identify which corners are missing.
          These bits should be mutually exclusive from bit 14 (see below).

   - 14 - corner mean missing (i.e. no valid corner pixels) This bit is set
          to 1 if the corner mean value telemetered from the onboard
          software is set to 4095 (see ECO 36-946) and represents a graded
          mode event which has no valid corner pixels.  Whether or not to
          set this if the level 1 software receives an event with 4 bad
          corners that wasn't flagged with a value of 4095 by the onboard
          software, is polemical.


Notes: The status word and bit masks identified here are specific to front-
       end level 1 processing.  Back-end level 1 status bits (TBD) will be
       logically grouped- either as an independent status word or as the
       high end bits of a 32 bit long.

       Bits 15-31 are currently unused.
```

Group: DA

Analysis Domain: Event

DS Tool Class: 3

DS Tool Category: Correction

Spec Name: spec24

Spec Category: Correction

Code Type: ASCDS

Code Source: ASC

acis_grade_events

Description: Grade ACIS events according to split geometry; sum PHA of pixels above split threshold, according to relevant grading system. Optionally, correct event PHA for charge transfer inefficiency (CTI) prior to grade (re-)determination and PHA summation.

Parameters:

```
split thresholds (CCD/node specific) (ARD)
number of overclock pairs
```

Inputs:

```
event pixels
grades table (flight bitmap to ASCA/ACIS/USER) (ARD)
CTI coefficient table (ARD)
```

Outputs:

```
flight grade (0-255)
ASCA grade (0-7) --or-- ACIS grade (TBD)
```

Processing:

1. From `DATAMODE` keyword, establish readout mode (TE or CC) and telemetry packing mode (for TE, could be faint, faint with bias, very faint, or graded; for CC, could be faint, graded, 3x3 faint, or 3x3 graded).

2. OPTIONAL: If events obtained in any of the timed exposure[2] *faint* modes, correct all 9 (25, for *very faint* mode) event PHA values for charge transfer inefficiency (CTI) using node-by-node lookup table of CTI coefficients in acis_CTI.fits (described in ACIS Analysis Reference Data ICD, see `http://space.mit.edu/ASC/docs`). The corrected values are then used to determine the event grade (see below).

   If events obtained in timed exposure or continuous clocking *graded* mode, correct total event PHA, via same algorithm.

   (Whether to replace "raw" PHA values with CTI-corrected PHA values in event list is TBD.)

   (a) Determine CCD node from event `CHIPX`, based on the following table:

Node	min(`CHIPX`)	max(`CHIPX`)
0	1	256
1	257	512
2	513	768
3	769	1024

   (b) The following two steps are performed iteratively until corrected PHA converges and/or max. (nominally ~ 10) iterations are reached:

[2] No CTI correction algorithm is TBD for continuous clocking readout mode.

(c) Determine parallel and serial (alternatively, X and Y, or CCD column and row) charge loss from CTI coefficients as follows:

$$C_X = P_a(n) + P_c(n) \times (\mathrm{PHA}^{P_b(n)})$$

$$C_Y = S_s(n) + S_c(n) \times (\mathrm{PHA}^{S_b(n)})$$

where C_X and C_Y are the parallel and serial charge loss; P_a, P_b, P_c and S_a, S_b, S_c are the parallel and serial CTI coefficients, respectively; n is the node; and PHA is the latest (corrected) event PHA (equal to PHA′, below). Initially, set PHA = PHA_0, where PHA_0 is the raw (original, uncorrected) event PHA.

(d) Determine column (`X`) offset from readout node (= number of serial transfers):

```
if (node eq 0 or node eq 2) then nx = CHIPX - (node * 256) + n_oc
if (node eq 1 or node eq 3) then nx = ((node + 1) * 256) - CHIPX + n_oc
```

where `n_oc` is 2× number of overclock pairs. The row (`Y`) offset from readout node (number of parallel transfers) is just given by `ny = CHIPY`.

(e) Calculate CTI-corrected PHA (= PHA′) for each of the 9 elements in the 3×3 pixel event island as follows:

```
PHAS'[0] = round(PHAS[0] / (1.0 - (nx-1)*C_X - (ny-1)*C_Y) + 0.5)
PHAS'[1] = round(PHAS[1] / (1.0 - nx*C_X - (ny-1)*C_Y) + 0.5)
PHAS'[2] = round(PHAS[2] / (1.0 - (nx+1)*C_X - (ny-1)*C_Y) + 0.5)

PHAS'[3] = round(PHAS[3] / (1.0 - (nx-1)*C_X - ny*C_Y) + 0.5)
PHAS'[4] = round(PHAS[4] / (1.0 - nx*C_X - ny*C_Y) + 0.5)
PHAS'[5] = round(PHAS[5] / (1.0 - (nx+1)*C_X - ny*C_Y) + 0.5)

PHAS'[6] = round(PHAS[6] / (1.0 - (nx-1)*C_X - (ny+1)*C_Y) + 0.5)
PHAS'[7] = round(PHAS[7] / (1.0 - nx*C_X - (ny+1)*C_Y) + 0.5)
PHAS'[8] = round(PHAS[8] / (1.0 - (nx+1)*C_X - (ny+1)*C_Y) + 0.5)
```

An analogous set of 25 expressions holds for *very faint* mode.

3. For each event obtained in timed exposure (continuous clocking) *faint* modes, grade events and sum pulse heights, as follows:

(a) The hexidecimal flight grade (or a value from 0-255 in base 10, for TE mode) is calculated from a pixel bitmap constructed the 8 (2) corrected PH values of the pixels surrounding the local maximum, based on the bitmap definitions for TE (CC) mode as described in the ACIS IP&CL software structure definitions (§5.7 of Rev. G, 1/97) and the ACIS Flight Software Requirements Specification (§§3.2.2.3.16, 3.2.3.3.14). The following schematic view is from a Peter Ford email of 6/16/97:

Here's the way it is for the SRS example, grade 33 (0x21). We're looking at the CCD from the HRMA side and the output nodes are at the bottom of the figure. The event is reported at ccdRow=N, ccdColumn=M.

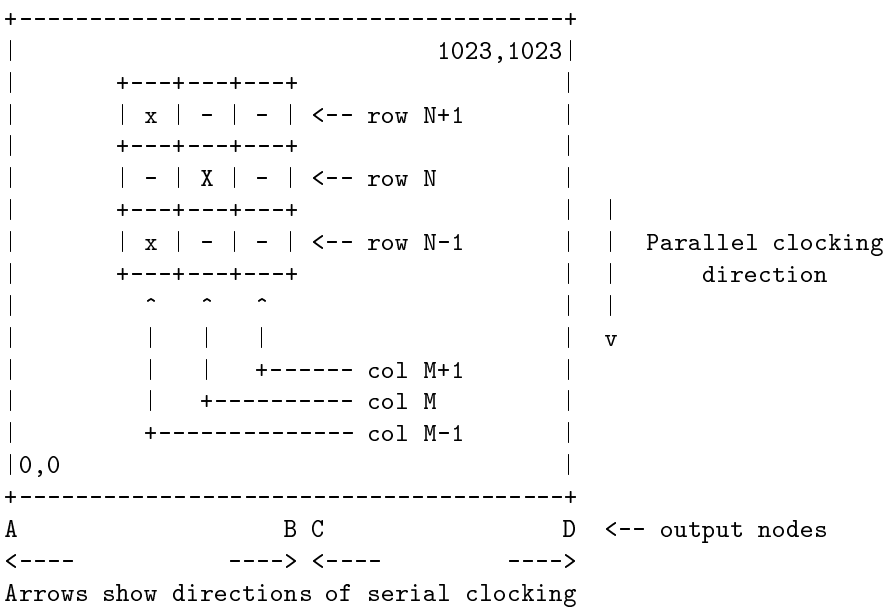

If the pixel PHA is greater or equal to the split threshold value (note: split threshold is CCD dependent, with different values for FI and BI devices), then the corresponding bit is marked, otherwise it stays 0; hence, for the above example, `001 00 001 = 0x021 (hex) = 33 (base 10)`. For continuous clocking (CC) 1x3 data, the bitmap just consists of bits in the right and left pixels next to the local maximum (hence has a value from 0-4 in base 10). *The bitmap assignments for CC 3x3 faint mode data are identical to those in TE faint modes.*

(b) Calculate the total event amplitude (PHA): Sum the corrected pulse height values of the central pixel and all surrounding pixels that are deemed part of the event, according to the value of the keyword `CORNERS` in the grade system analysis reference data file:

```
-1 => never include corners in total PHA
 0 => always include corners
 1 => flight software (ACIS) convention (see ACIS flight s/w requirements
      spec, Sec 3.2.2.3.16)
 2 => ASCA convention (see http://heasarc.gsfc.nasa.gov/0/docs/asca/sis_grade.gif)
```

In the ASCA system corner pixel PHAs are generally excluded, whereas in the ACIS system, corner pixel PHAs are included if adjacent to at least one "side" pixel at or above split threshold.

4. Based on the flight grade just calculated for faint modes, or as telemetered in the event record in the case of graded modes, assign an ASCA-style quality (grade) in either the ASCA or (TBD) ACIS systems; see `http://space.mit.edu/ASC/docs/grades.ps.gz`. See Analysis Reference Data ICD for specification of file that maps "flight" grade to "quality" (ASCA or ACIS) grade.

Release: 4

Group: DA

Analysis Domain: Event

DS Tool Class: 3

DS Tool Category: Correction

Spec Name: spec23

Spec Category: Correction

Code Type: ASCDS

Code Source: ASC

acis_calc_pi

Description: Convert the pulse height amplitudes (PHA) of events in ADU to ENERGY in eV and pulse-invariant (PI) values in channels.

Parameters:

```
PI bin width (default: 14.6 eV)
PI array size (default: 1024)
Randomize PHAs (default: yes)
```

Inputs:

```
event list
Analysis Reference Data (ARD) gain_map table (i.e. acisDyyyy-mm-ddgainNnnnn_nnn.fits)
```

Outputs:

```
Updated event list (with ENERGY and PI columns)
```

Processing:

For each event in an event list:

1. Verify that the `PHA` column is present in the event list.
2. Convert the value of PHA for an event from an integer number to a real number by adding an offset that is randomly chosen from a uniform distribution between -0.5 and $+0.5$. The use of the random offset is optional and controlled by a "yes/no" parameter. The default condition for this parameter is "yes" (i.e. use the offset).
3. Calculate the value of the ENERGY of an event that corresponds to the value of the PHA of the event using the vectors named ENERGY and PHA in the gain ARD file. Select the gain ARD file that is appropriate for the nominal temperature of the focal plane during the observation (in a manner that is TBD). (See http://space.mit.edu/ASC/docs/docs.html for a description of the gain ARD files.) Since the gain depends on the position of an event on a chip, the vectors ENERGY and PHA are tabulated in the gain ARD region-by-region for each chip. To compute the value of the ENERGY of an ACIS event:
   i. Find the vectors ENERGY and PHA of the row in the gain ARD file that satisfies the conditions that

$$\begin{aligned} \text{chip id} &= \text{CCD_ID}, \\ \text{CHIPX_MIN} \leq \text{CHIPX} &\leq \text{CHIPX_MAX}, \text{ and} \\ \text{CHIPY_MIN} \leq \text{CHIPY} &\leq \text{CHIPY_MAX}, \end{aligned}$$

   where "chip id" is the chip on which the event was detected, CHIPX and CHIPY specify the location on the chip at which the event was detected, and CCD_ID, CHIPX_MIN, CHIPX_MAX, CHIPY_MIN, and CHIPY_MAX are the names of columns in the gain ARD file.

ii. Find the two non-zero (real!) values PHA_i and PHA_{i+1} in the vector PHA such that

$$0 < \mathrm{PHA}_i \leq \mathrm{PHA} < \mathrm{PHA}_{i+1},$$

where PHA is the pulse height amplitude of the event.

iii. Set the ENERGY of the event to be

$$\mathrm{ENERGY} = \frac{\mathrm{PHA} - \mathrm{PHA}_i}{\mathrm{PHA}_{i+1} - \mathrm{PHA}_i}\Big(\mathrm{ENERGY}_{i+1} - \mathrm{ENERGY}_i\Big) + \mathrm{ENERGY}_i,$$

where ENERGY_i and ENERGY_{i+1} are the non-zero values in the vector ENERGY that correspond to the values of PHA_i and PHA_{i+1}, respectively.

This formula is valid if the value of the PHA of the event satisfies

$$0 < \mathrm{PHA}_1 \leq \mathrm{PHA} < \mathrm{PHA}_n,$$

where PHA_1 and PHA_n are the smallest and largest, respectively, non-zero values in the vector PHA. If $0 < \mathrm{PHA} < \mathrm{PHA}_1$,

$$\mathrm{ENERGY} = \max\left(\frac{\mathrm{PHA} - \mathrm{PHA}_1}{\mathrm{PHA}_2 - \mathrm{PHA}_1}\Big(\mathrm{ENERGY}_2 - \mathrm{ENERGY}_1\Big) + \mathrm{ENERGY}_1, 0\right).$$

If $\mathrm{PHA} \geq \mathrm{PHA}_n$,

$$\mathrm{ENERGY} = \frac{\mathrm{PHA} - \mathrm{PHA}_{n-1}}{\mathrm{PHA}_n - \mathrm{PHA}_{n-1}}\Big(\mathrm{ENERGY}_n - \mathrm{ENERGY}_{n-1}\Big) + \mathrm{ENERGY}_{n-1}.$$

4. Compute the value of the PI of an event by dividing the value of the ENERGY of the event by the PI bin width parameter (e.g. 14.6 eV by default) and by rounding the result to the nearest integer in the range from 1 to n, where n is the number of PI bins (e.g. 1024 by default). The value of PI may have a value of zero in the special case that PHA has a value of zero. In this case, also set the value of ENERGY to zero.

5. Write the values of the `ENERGY` and `PI` to the output event file.

Release: 4

Group: DA

Analysis Domain: Event

DS Tool Class: 3

DS Tool Category: Correction

Spec Name: spec2023

Spec Category: Correction

Code Type: ASCDS

Code Source: ASC

acis_build_mask

Description: Build spatial/PHA/event sampling mask for later use in exposure map (and other processes TBD). Mask is created from windows lists used by ACIS backend processors (BEPs) in accepting and rejecting events. Each CCD can have a set of up to 6 BEP spatial acceptance windows; furthermore, each window has an associated PHA acceptance range and event sampling interval (the "sample cycle").

Parameters:

Inputs:

```
from parameter block file header (*_ccpbk.fits or *_tepbk.fits):
  subarray definition, CCD coords
from 1-D (CC) or 2-D (TE) window list file (*_win1.fits or *_win2.fits):
  backend processor window table (one per active CCD):
    CCD_ID
    lower left corner position, CCD coords (CC mode: first CCD column)
    window X,Y dimensions (CC mode: X only)
    accepted event PHA range
    event sample cycle, N (i.e., accept every Nth event)
```

Outputs:

```
subarray definition, CHIP coords (header keywords)
window list table
  CCD_ID
  window precedence
  spatial description, CHIP coords
  PHA range
  sample cycle
```

Processing:

1. Read subarray start row `STARTROW` and subarray rows `ROWCNT` from parameter block file header. Calc. keywords `FIRSTROW` and `NROWS` as follows:

   ```
   FIRSTROW = STARTROW + 1
   NROWS = STARTROW + ROWCNT + 1
   ```

   and write to header of *_msk FITS file.

2. Read in window list from each 2D (CC: 1D) window definition file included in science run telemetry. [If no window files are included in telemetry for a given ACIS science run, see below.]

3. For each L0 window table entry, calculate and store the following in one row of the output mask table:

   ```
   WINDOW (running value from 1 up to, but not exceeding, 6 for each CCD)
   LL_CHIPX = LL_CCDX + 1
   LL_CHIPY = LL_CCDY + 1
   UR_CHIPX = LL_CCDX + CCDCOL + 1
   UR_CHIPY = LL_CCDY + CCDROW + 1
   ```

The entry for `WINDOW` indicates the order in which windows were applied in accepting or rejecting events. Thus the window ordering scheme of the ACIS flight software is made explicit here. Note that the first window listed for a given CCD is assigned `WINDOW` = 1 and was the first one applied when accepting/rejecting events; the 2nd window listed for a given CCD is assigned `WINDOW` = 2 and was the 2nd one applied when accepting/rejecting events; etc.

The L1 table entries for `CCD_ID, SAMP_CYC, PHAMIN, PHARANGE` retain their L0 values.

4. Case of no window files output by telemetry: define one window (row in table) per CCD, as follows:

```
CCD_ID = [0 to 9]
WINDOW = 0
LL_CHIPX = 1
LL_CHIPY = 1
UR_CHIPX = 1024
UR_CHIPY = 1024
SAMP_CYC = 1
PHAMIN   = 0
PHARANGE = 65535
```

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec31

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

acis_build_badpix

Description: The Data System tool acis_build_badpix reads the "badpix" Analysis Reference Data (ARD) file, a bias error file (*_berr0.fits), and a bias image (*_bias0.fits) for a particular observation and creates the file *_bpix1.fits for that observation. The file *_bpix1.fits is a superset of the "static" bad pixels and columns in the badpix ARD file and the pixels that are deemed to be bad for a particular observation because they have bias-parity errors (for example). The Data System tool acis_format_events uses the file *_bpix1.fits for an observation to set various bits equal to one in the column STATUS of the Level 1 events file for the observation. The various bits are set equal to one for events that occurred on bad pixels or columns or adjacent to these regions. These events (and others that have non-zero values of STATUS) are excluded from the Level 2 events file for the observation. Since the file *_bpix1.fits contains a complete set of the bad pixels and columns for an observation, it should be used to construct an exposure map for the observation.

Parameters:

Inputs:

```
from a bad pixel ARD file (acisDYYYY-MM-DDbadpixN0000.fits):
   bad pixel and column list
from a bias-map image file (*_bias0.fits):
   bad pixel map (i.e. pixels assigned values of 4094 and 4095)
from bias-error file (*_berr0.fits):
   bias-parity error list
```

Outputs:

```
bad pixel and column list (*_bpix1.fits):
   SHAPE
   COMPONENT
   CHIPX
   CHIPY
   TIME
   STATUS
```

Processing:

1. Read the appropriate badpix ARD file and copy the STATUS bits "as is" to the output structure so that the bad pixels and columns in the output structure are consistent with the bit-encoded column STATUS in the Level 1 events file. For example, if an event in a Level 1 events file has STATUS bit 5 set to 1 because the coordinates of the event are immediately adjacent to a bad pixel or column, this adjacent pixel or column should be listed in the corresponding *_bpix1.fits file. Applicable Document 3 contains a description of the different bits in the column STATUS of the badpix ARD. If the DATAMODE is not VFAINT (i.e. if the event islands are 3×3 instead of 5×5), do not include the bad pixels and columns that have only STATUS bits 9 (i.e. integer equivalent is 512) equal to one.
2. Read the appropriate bias-parity error file (*_berr0.fits) for an observation. Copy these pixels to the output structure and set bit 2 (i.e. integer equivalent is 4) equal to one in the associated output column STATUS.
3. Read the appropriate bias image file (*_bias0.fits) for the observation. If a pixel has a value of 4095, set bit 3 (i.e. integer equivalent is 8) of the output column STATUS equal to one for the

pixel. If a pixel has a value of 4094, set bit 4 (i.e. integer equivalent is 16) equal to one for the pixel. If the observation was performed in faint with bias mode, the bias values telemetered with an event may be used instead of a bias image.

4. Merge the output from the previous steps and write the bad pixel and column information to the Level 1 file *_bpix1.fits for the observation. This FITS file should contain the following columns.

   ```
   SHAPE
   COMPONENT
   CHIPX
   CHIPY
   TIME
   STATUS
   ```

   The values of the column TIME are the times after which the pixels and columns are known to be bad. If a pixel or column has more than one condition that renders it bad, the value of the column TIME will be set to the earliest value of the times associated with the different conditions for the pixel or column. The column STATUS contains a bit-encoded description of the why each pixel or column is considered bad. More than one of the bits may be set equal to one for a pixel or column.

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec2032

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

3.3 Level 2 Tools

acis_filter_events

Description: Select ACIS events according to any or all available event attributes; in particular, select on event grade, position, energy, and status. Optionally, write output file of selected (filtered) events. Special-purpose wrapper for `data_copy`.

Parameters:

```
Filter criteria; admissible values for:
  TIME
  X,Y (e.g. regions file)
    CHIP, TDET, DET or sky (RA,dec) coord systems
  PHA
  PI
  GRADE
  CCDID
  STATUS
```

Inputs:

```
``Raw'' event list
```

Outputs:

```
Filtered event list
Filter criteria (as header keywords)
```

Processing:

1. Open parameter file and determine filter criteria.
2. Open input event file.
3. Apply filter criteria to select events.
4. Optionally, write output file of selected (filtered) events. Include header keywords specifying filters applied.

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec2035

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

acis_bin_events

Description: Bin ACIS events into (1-D or 2-D) histogram. This is a general-purpose binning tool that serves as the core of special-purpose tools such as `acis_extract_spectrum`, yet is more specific in its function than `data_bin_photons` (around which it wraps).

Parameters:

```
Event attribute over which to bin:
  TIME
  X,Y (e.g. regions file)
    CHIP, TDET, DET or sky (RA,dec) coord systems
  PHA
  PI
  GRADE
Bin width
Bin range
```

Inputs:

```
event list
```

Outputs:

```
histogram (or image, if selected event attribute is X,Y)
```

Processing:

1. Read parameter file and establish event attribute over which to bin (and, implicitly, dimensionality of resulting histogram). Evaluate binning parameters (bin width, bin range).
2. Open and read events file. (Evaluate keywords for presence of applied filter(s)).
3. Initialize histogram, based on event attrribute and bin parameters.
4. Loop over events, incrementing histogram location indexed by the selected event attribute.
5. Optional (if event filters present): Read exposure map, and bin in like manner to derive exposure time and effective area.
6. Write histogram file.

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec2036

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

acis_extract_spectrum

Description: Bin (appropriately filtered) ACIS events into PHA or PI histogram, and (optionally) calculate exposure time and effective area for selected parameter space. Wrapper around `acis_filter_events` and `acis_bin_events`.

Parameters:

```
Histogram type (PHA or PI)
Filter criteria for event attributes:
  TIME
  X,Y (e.g. regions file)
    CHIP, TDET, DET or sky (RA,dec) coord systems
  GRADE
  STATUS
  CCDID
Bin width
Bin range
```

Inputs:

```
event list
exposure map
```

Outputs:

```
histogram (PHA or PI)
region exposure time
region effective area
```

Processing:

1. Read parameter file and establish event attribute over which to bin (PHA or PI). Evaluate filter criteria and binning parameters (bin width, bin range).
2. Open and read events file.
3. Initialize histogram, based on event attribute and bin parameters.
4. Loop over events:
   (a) Apply filter criteria to select or de-select events.
   (b) For selected events, increment histogram location indexed by the event pulse height.
5. Optional: Read exposure map, apply filter criteria to derive exposure time and effective area.
6. Write histogram (spectrum) file (optionally including exposure time and effective area and/or ARF file [TBD]).

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec2037

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

acis_extract_image

Description: Bin (appropriately filtered) ACIS events into image for selected coordinate system. Wrapper around `acis_filter_events` and `acis_bin_events`.

Parameters:

```
X,Y coordinate system
  (CHIP, TDET, DET or sky (RA,dec))
Filter criteria for event attributes:
  TIME
  PHA
  PI
  GRADE
  STATUS
  CCDID
Bin width
X,Y ranges
```

Inputs:

```
event list
```

Outputs:

```
image
```

Processing:

1. Read parameter file and establish event attribute over which to bin image (i.e., which coord system). Evaluate filter criteria and binning parameters (spatial bin width, bin range).
2. Open and read events file.
3. Initialize image, based on coord system and bin parameters.
4. Loop over events:
   (a) Apply filter criteria to select or de-select events.
   (b) For selected events, increment image location indexed by the event coordinates.
5. Optional: Read exposure map, and bin in like manner to derive exposure time and effective area.
6. Write histogram (spectrum) file (optionally including exposure time and effective area).

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec2038

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC

acis_extract_lightcurve

Description: Bin (appropriately filtered) ACIS events into light curve, and (optionally) calculate exposure time and effective area for selected parameter space. Wrapper around `acis_filter_events` and `acis_bin_events`.

Parameters:

```
Filter criteria for event attributes:
  X,Y (e.g. regions file)
    CHIP, TDET, DET or sky (RA,dec) coord systems
  GRADE
  STATUS
  CCDID
TIME bin width
TIME range
```

Inputs:

```
event list
exposure map
```

Outputs:

```
light curve (histogram of counts vs. time bin)
region exposure time
region effective area
```

Processing:

1. Read parameter file and establish event filter criteria and time binning parameters (bin width, bin range).
2. Open and read events file.
3. Initialize light curve histogram, based on event attribute and bin parameters.
4. Loop over events:
   (a) Apply filter criteria to select or de-select events.
   (b) For selected events, increment histogram location indexed by the event time.
5. Optional: Read exposure map, apply filter criteria to derive exposure time and effective area.
6. Write histogram (light curve) file (optionally including exposure time and effective area [TBD]).

Release: 4

Group: TBD

Analysis Domain: TBD

DS Tool Class: TBD

DS Tool Category: TBD

Spec Name: spec2039

Spec Category: TBD

Code Type: ASCDS

Code Source: ASC