




MIT Kavli Institute



Chandra X-Ray Center

MEMORANDUM

July 23, 2015

To: Jonathan McDowell, SDS Group Leader
From: Glenn E. Allen, SDS
Subject: `acis_process_events` spec
Revision: 3.32
URL: <http://space.mit.edu/CXC/docs/docs.html#ape>
File: `/nfs/inconceivable/d0/sds/specs/acis_process_events/ape_spec_3.32.tex`

1 `acis_process_events`

This spec, which is incomplete, describes some of processing steps for continuous-clocking mode data.

1.1 Description

1.2 Input

1.3 Output

1.4 Parameters

1.5 Processing

1.5.1 Error checking

The following steps are performed once prior to the processing of the data for each input ACIS event.

1. `obsfile`:

(a) Validation:

i. Existence:

If

`obsfile` \neq `none` and (1)

`obsfile` \neq `NONE` (2)

and the `obsfile` does not exist, then `obsfile` is changed to “none” and `acis_process_events` produces a warning message.

ii. Permission:

If

`obsfile` \neq none and (3)

`obsfile` \neq NONE (4)

and the file permissions do not allow the `obsfile` to be read, then `obsfile` is changed to “none” and `acis_process_events` produces a warning message.

iii. OBS_MODE:

If

`obsfile` \neq none and (5)

`obsfile` \neq NONE, (6)

then

A. If the `obsfile` does not include the keyword `obs_mode`, then `OBS_MODE` is set to “none”.

B. If the `obsfile` includes the keyword `obs_mode` and

`obs_mode` = pointing or (7)

`obs_mode` = POINTING or (8)

`obs_mode` = secondary or (9)

`obs_mode` = SECONDARY, (10)

then `OBS_MODE` is set to the value of `obs_mode`. Hereafter this keyword is referred to as `OBS_MODE`.

C. If the `obsfile` includes the keyword `obs_mode` and

`obs_mode` \neq pointing and (11)

`obs_mode` \neq POINTING and (12)

`obs_mode` \neq secondary and (13)

`obs_mode` \neq SECONDARY, (14)

then `OBS_MODE` is set to “none”.

2. `acaofffile`:

(a) Validation:

If

`OBS_MODE` = pointing or (15)

`OBS_MODE` = POINTING, (16)

then

i. Setting:

If

`acaofffile` = none or (17)

`acaofffile` = NONE, (18)

then `acis_process_events` produces a warning message.

ii. Existence:

If

$$\text{acaofffile} \neq \text{none} \text{ and} \tag{19}$$

$$\text{acaofffile} \neq \text{NONE} \tag{20}$$

and the `acaofffile` does not exist, then `acis_process_events` produces a warning and `acaofffile` is set to “none.”

iii. Permission:

If the `acaofffile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

iv. CONTENT:

If the `acaofffile` does not have an HDU h_{acaoff} with the keyword

$$\text{CONTENT} = \text{ASPSOL}, \tag{21}$$

then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

v. Keyword:

If HDU h_{acaoff} of the `acaofffile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

vi. Columns:

If HDU h_{acaoff} of the `acaofffile` does not include the columns `TIME`, `RA`, `DEC`, and `ROLL` then `acis_process_events` produces a warning message and `acaofffile` is set to “none.” Hereafter, these columns are referred to as $\text{TIME}_{\text{acaoff}}$, $\text{RA}_{\text{acaoff}}$, $\text{DEC}_{\text{acaoff}}$, and $\text{ROLL}_{\text{acaoff}}$.

vii. Sequential:

If more than one valid `acaofffile` is specified and the the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

3. `alignmentfile`:

(a) Validation:

If

$$\text{OBS_MODE} = \text{pointing} \text{ or} \tag{22}$$

$$\text{OBS_MODE} = \text{POINTING}, \tag{23}$$

then

i. Setting:

If

$$\text{alignmentfile} = \text{none} \text{ or} \tag{24}$$

$$\text{alignmentfile} = \text{NONE}, \tag{25}$$

then `acis_process_events` produces a warning message.

ii. Existence:

If

$$\text{alignmentfile} \neq \text{none} \text{ and} \tag{26}$$

$$\text{alignmentfile} \neq \text{NONE} \tag{27}$$

and the `alignmentfile` does not exist, then `acis_process_events` produces a warning message and `alignmentfile` is set to “none.”

iii. Permission:

If the `alignmentfile` exists and the file permissions do not allow it to be read, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

iv. CONTENT:

If the `alignmentfile` does not have an HDU $h_{\text{alignment}}$ with the keyword

$$\text{CONTENT} = \text{ASPSOL}, \quad (28)$$

then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

v. Keyword:

If HDU $h_{\text{alignment}}$ of the `alignmentfile` does not include the keyword `TSTART`, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

vi. Columns:

If HDU $h_{\text{alignment}}$ of the `alignmentfile` does not include the columns `DY`, `DZ`, and `DTHETA` then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

vii. Sequential:

If more than one valid `alignmentfile` is specified and the values `TSTART` are not in increasing order, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

4. `fltfile`:

(a) Validation:

i. Existence:

If

$$\text{fltfile} \neq \text{none} \text{ and} \quad (29)$$

$$\text{fltfile} \neq \text{NONE} \quad (30)$$

and the `fltfile` does not exist, then `acis-process_events` produces a warning message and `fltfile` is set to “none.”.

ii. Permission:

If the `fltfile` exists and the file permissions do not allow it to be read, then `acis-process_events` produces a warning message and `fltfile` is set to “none.”.

iii. CONTENT:

If the `fltfile` does not have one or more HDUs h_{flt} with the keyword

$$\text{CONTENT} = \text{GTI}, \quad (31)$$

then `acis-process_events` produces a warning message and `fltfile` is set to “none.”.

iv. Columns:

If the HDUs h_{flt} of the `fltfile` do not include the columns `START` and `STOP`, then `acis-process_events` produces a warning message and `fltfile` is set to “none.”.

5. `infile`:

(a) Existence:

If the `infile` does not exist, then `acis-process_events` exits with an error message.

(b) Permission:

If the `infile` exists and the file permissions do not allow it to be read, then `acis-process_events` exits with an error message.

(c) Validation:

i. OBS_MODE:

If OBS_MODE = none, then

- A. The OBS_MODE is read from the HDU h_{in} keyword of the same name. Hereafter this keyword is referred to as OBS_MODE.
- B. If the HDU h_{in} does not include the keyword OBS_MODE, then OBS_MODE is set to “none” and `acis_process_events` produces a warning message.
- C. If the HDU h_{in} includes the keyword OBS_MODE and

$$\text{obs_mode} \neq \text{pointing and} \quad (32)$$

$$\text{obs_mode} \neq \text{POINTING and} \quad (33)$$

$$\text{obs_mode} \neq \text{secondary and} \quad (34)$$

$$\text{obs_mode} \neq \text{SECONDARY,} \quad (35)$$

then OBS_MODE is set to “none” and `acis_process_events` produces a warning message.

ii. DATAMODE:

The DATAMODE is read from the HDU h_{in} keyword of the same name. If the HDU h_{in} does not include the keyword DATAMODE or if

$$\text{DATAMODE} \neq \text{CC33_FAINT and} \quad (36)$$

$$\text{DATAMODE} \neq \text{CC33_GRADED and} \quad (37)$$

$$\text{DATAMODE} \neq \text{FAINT and} \quad (38)$$

$$\text{DATAMODE} \neq \text{FAINT_BIAS and} \quad (39)$$

$$\text{DATAMODE} \neq \text{GRADED and} \quad (40)$$

$$\text{DATAMODE} \neq \text{VFAINT,} \quad (41)$$

then `acis_process_events` exits with an error message. Hereafter, the value of this keyword is referred to as DATAMODE_{in} .

iii. CONTENT:

If the `infile` does not have an HDU h_{in} with the keyword

$$\text{CONTENT} = \text{EVT0 or} \quad (42)$$

$$\text{CONTENT} = \text{EVT1 or} \quad (43)$$

$$\text{CONTENT} = \text{TGEVT1 or} \quad (44)$$

$$\text{CONTENT} = \text{EVT2,} \quad (45)$$

then `acis_process_events` exits with an error message. Hereafter, the value of this keyword is referred to as CONTENT_{in} .

iv. TIME:

If HDU h_{in} of the `infile` does not include the column TIME, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as TIME_{in} .

v. TIME_R0:

If

$$\text{DATAMODE}_{in} = \text{CC33_FAINT or} \quad (46)$$

$$\text{DATAMODE}_{in} = \text{CC33_GRADED} \quad (47)$$

and

$$\text{CONTENT}_{in} = \text{EVT1 or} \quad (48)$$

$$\text{CONTENT}_{in} = \text{TGEVT1 or} \quad (49)$$

$$\text{CONTENT}_{in} = \text{EVT2} \quad (50)$$

and HDU h_{in} of the `infile` does not include the column `TIME_RO`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `TIME_ROin`.

vi. `EXPNO`:

If HDU h_{in} the `infile` does not include the column `EXPNO`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `EXPNOin`.

vii. `CCD_ID`:

A. If

$$\text{CONTENT}_{in} = \text{EVT0} \tag{51}$$

and HDU h_{in} of the `infile` does not include the keyword `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this keyword is referred to as `CCD_IDin`.

B. If

$$\text{CONTENT}_{in} = \text{EVT1 or} \tag{52}$$

$$\text{CONTENT}_{in} = \text{TGEVT1 or} \tag{53}$$

$$\text{CONTENT}_{in} = \text{EVT2} \tag{54}$$

and HDU h_{in} of the `infile` does not include the column `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CCD_IDin`.

viii. `CCDX`:

A. If

$$\text{CONTENT}_{in} = \text{EVT0} \tag{55}$$

and HDU h_{in} of the `infile` does not include the column `CCDX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CCDXin`.

ix. `CHIPX`:

A. If

$$\text{CONTENT}_{in} = \text{EVT1 or} \tag{56}$$

$$\text{CONTENT}_{in} = \text{TGEVT1 or} \tag{57}$$

$$\text{CONTENT}_{in} = \text{EVT2} \tag{58}$$

and HDU h_{in} of the `infile` does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CHIPXin`.

x. `CCDY`:

A. If

$$\text{CONTENT}_{in} = \text{EVT0} \tag{59}$$

and

$$\text{DATAMODE}_{in} = \text{FAINT or} \tag{60}$$

$$\text{DATAMODE}_{in} = \text{FAINT_BIAS or} \tag{61}$$

$$\text{DATAMODE}_{in} = \text{GRADED or} \tag{62}$$

$$\text{DATAMODE}_{in} = \text{VFAINT} \tag{63}$$

and HDU h_{in} of the `infile` does not include the column `CCDY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CCDYin`.

xi. `TROW`:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (64)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ or} \quad (65)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (66)$$

and HDU h_{in} of the `infile` does not include the column `TROW`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `TROWin`.

xii. `CHIPY`:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \text{ or} \quad (67)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ or} \quad (68)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (69)$$

and HDU h_{in} of the `infile` does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CHIPYin`.

xiii. `TIMEDEL`:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ or} \quad (70)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (71)$$

and HDU h_{in} of the `infile` does not include the keyword `TIMEDEL`, then `acis_process_events` exits with an error message. Hereafter this keyword is referred to as `TIMEDELin`.

xiv. `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, `DEC_PNT`, `CHIPY_TG`, `CHIPY_ZO`, and `TG_M`:

If

$$\text{OBS_MODE} = \text{pointing} \text{ or} \quad (72)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (73)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ or} \quad (74)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (75)$$

then

A. `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, `DEC_PNT`:

If HDU h_{in} of the `infile` does not include the keywords `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, and `DEC_PNT`, then `acis_process_events` exits with an error message. Hereafter these keywords are referred to as `RA_TARGin`, `DEC_TARGin`, `RA_NOMin`, `DEC_NOMin`, `RA_PNTin`, and `DEC_PNTin`, respectively.

B. `CHIPY_TG`, `CHIPY_ZO`, and `TG_M`:

If

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (76)$$

and HDU h_{in} of the `infile` does not include the columns `CHIPY_TG`, `CHIPY_ZO`, and `TG_M`, then `acis_process_events` exits with an error message. Hereafter these columns are referred to as `CHIPY_TGin`, `CHIPY_ZOin`, and `TG_Min`, respectively.

6. `stop`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

`stop` \neq none and (77)

`stop` \neq chip and (78)

`stop` \neq tdet and (79)

`stop` \neq det and (80)

`stop` \neq tan and (81)

`stop` \neq sky, (82)

then `stop` is changed to “none” and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:

If

`OBS_MODE` \neq pointing and (83)

`OBS_MODE` \neq POINTING (84)

and

`stop` \neq none and (85)

`stop` \neq chip and (86)

`stop` \neq tdet, (87)

then `stop` is changed to “none” and `acis_process_events` produces a warning message.

iii. `acaofffile`:

If

`OBS_MODE` = pointing or (88)

`OBS_MODE` = POINTING (89)

and

`acaofffile` = none and (90)

`stop` \neq none and (91)

`stop` \neq chip and (92)

`stop` \neq tdet, (93)

then `acis_process_events` produces a warning message and `stop` is changed to “none.”

iv. `alignmentfile`:

If

`OBS_MODE` = pointing or (94)

`OBS_MODE` = POINTING (95)

and

`alignmentfile = none and` (96)

`stop ≠ none and` (97)

`stop ≠ chip and` (98)

`stop ≠ tdet,` (99)

then `acis_process_events` produces a warning message and `stop` is changed to “none.”

7. `doevtgrade`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

If

`doevtgrade ≠ yes and` (100)

`doevtgrade ≠ no,` (101)

then `acis_process_events` exits with an error message.

8. `apply_cti`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

`apply_cti ≠ yes and` (102)

`apply_cti ≠ no,` (103)

then `acis_process_events` exits with an error message.

ii. PHAS:

If

`apply_cti = yes` (104)

and the `infile` does not include the column PHAS, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. `doevtgrade`:

If

`apply_cti = yes and` (105)

`doevtgrade = no,` (106)

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

9. `badpixfile`:

(a) Validation:

i. Existence:

If

$$\text{badpixfile} \neq \text{none} \text{ and} \quad (107)$$

$$\text{badpixfile} \neq \text{NONE} \quad (108)$$

and the `badpixfile` does not exist, then `badpixfile` is changed to “none” and `acis-process_events` produces a warning message.

ii. Permission:

If

$$\text{badpixfile} \neq \text{none} \text{ and} \quad (109)$$

$$\text{badpixfile} \neq \text{NONE} \quad (110)$$

and the file permissions do not allow it to be read, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message.

iii. CONTENT:

If

$$\text{badpixfile} \neq \text{none} \text{ and} \quad (111)$$

$$\text{badpixfile} \neq \text{NONE} \quad (112)$$

and the `badpixfile` does not have one or more HDUs h_{badpix} with the keyword

$$\text{CONTENT} = \text{BADPIX} \text{ or} \quad (113)$$

$$\text{CONTENT} = \text{CDB_ACIS_BADPIX}, \quad (114)$$

then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message.

iv. Keyword:

If

$$\text{badpixfile} \neq \text{none} \text{ and} \quad (115)$$

$$\text{badpixfile} \neq \text{NONE} \quad (116)$$

and the HDU(s) h_{badpix} of the `badpixfile` do not include the keyword `CCD_ID`, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message. Hereafter this keyword is referred to as `CCD_IDbadpix`.

v. Columns:

If

$$\text{badpixfile} \neq \text{none} \text{ and} \quad (117)$$

$$\text{badpixfile} \neq \text{NONE} \quad (118)$$

and the HDU(s) h_{badpix} of the `badpixfile` do not include the columns `CHIPX`, `CHIPY`, `TIME`, `TIME_STOP`, and `STATUS`, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `CHIPXbadpix`, `CHIPYbadpix`, `TIMEbadpix`, `TIME_STOPbadpix`, and `STATUSbadpix`, respectively.

10. `ctifile`:

(a) Validation:

If

$$\text{ctifile} \neq \text{caldb} \text{ and} \tag{119}$$

$$\text{ctifile} \neq \text{CALDB}, \tag{120}$$

then

i. Existence:

If the `ctifile` does not exist, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If the `ctifile` exists and the file permissions do not allow it to be read, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. CONTENT:

If the `ctifile` does not have one or more HDUs h_{cti} with the keyword

$$\text{CONTENT} = \text{CDB_ACIS_CTI}, \tag{121}$$

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iv. Columns:

If the first such HDU of the `ctifile` does not include the columns `CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `PHA`, `VOLUME_X`, `VOLUME_Y`, `FRCTRLX`, `FRCTRLY`, `TCTIX`, and `TCTIY`, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

11. `clobber`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{clobber} \neq \text{yes} \text{ and} \tag{122}$$

$$\text{clobber} \neq \text{no}, \tag{123}$$

then `clobber` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If

$$\text{clobber} = \text{yes} \tag{124}$$

and the `outfile` exists and the file permissions of the `outfile` do not allow it to be overwritten, then `acis_process_events` exits with an error message.

iii. Don't overwrite:

If

$$\text{clobber} = \text{no} \tag{125}$$

and the `outfile` exists, then `acis_process_events` exits with an error message.

12. `pix_adj`:

(a) Lowercase:
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:
If

`pix_adj` \neq centroid and (126)

`pix_adj` \neq edser and (127)

`pix_adj` \neq none and (128)

`pix_adj` \neq randomize, (129)

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

ii. OBS_MODE:

If

OBS_MODE \neq pointing and (130)

OBS_MODE \neq POINTING (131)

and

`pix_adj` \neq none, (132)

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iii. stop:

If

`pix_adj` = centroid or (133)

`pix_adj` = edser or (134)

`pix_adj` = randomize (135)

and

`stop` \neq sky, (136)

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iv. PHAS:

If

`pix_adj` = centroid (137)

and the `infile` does not include the column PHAS, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

v. FLTGRADE:

If

`pix_adj` = edser (138)

and the `infile` does not include the column FLTGRADE, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

13. `subpixfile`:

(a) If

$$\text{pix_adj} = \text{edser}, \quad (139)$$

then

i. Existence:

If the `subpixfile` does not exist, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

ii. Permission:

If the `subpixfile` exists and the file permissions do not allow it to be read, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iii. Validation:

A. CONTENT:

If the `subpixfile` does not have one or more HDUs h_{subpix} with the keyword

$$\text{CONTENT} = \text{AXAF_SUBPIX}, \quad (140)$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

B. Keyword:

If the HDUs h_{subpix} of the `subpixfile` do not include the keyword `CCD_ID`, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

C. Columns:

If the HDUs h_{subpix} of the `subpixfile` do not include binary tables with the columns `FLTGRADE`, `NPOINTS`, `ENERGY`, `CHIPX_OFFSET`, and `CHIPY_OFFSET`, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `FLTGRADEsubpix`, `NPOINTSsubpix`, `ENERGYsubpix`, `CHIPX_OFFSETsubpix`, and `CHIPY_OFFSETsubpix`, respectively.

1.5.2 Initializations

1. Focal-point CCD:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (141)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (142)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (143)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (144)$$

then the values of `RA_PNTin` and `DEC_PNTin` are used to determine the `CCD_ID` associated with the focal point. Hereafter this value is referred to as `CCD_IDfocus`.*

2. Zeroth-order coordinates:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (145)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (146)$$

*The focal point is the location associated with the optical axis in the absence of dither. This location should not be confused with the aim point, which is the location illuminated by an undithered point source provided that the source is not offset from the target location.

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (147)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (148)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (149)$$

then the $\text{CHIPY_ZO}_{\text{in}}$ coordinates are processed to obtain the median value:

$$\text{CHIPY_ZO}_{\text{med}} = \text{median}(\text{CHIPY_ZO}_{\text{in}}). \quad (150)$$

The calculation of this CHIPY_ZO statistic is performed using only the events for which

$$\text{CHIPY_ZO} \neq \text{NULL} \quad (151)$$

and the TIME is in a good-time interval.[†]

3. `acaofffile`:

(a) TIME_{min} and TIME_{max} :

If

$$\text{OBS_MODE} = \text{pointing or} \quad (152)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (153)$$

and

$$\text{acaofffile} \neq \text{none and} \quad (154)$$

$$\text{alignmentfile} \neq \text{none}, \quad (155)$$

then the `acaofffile` data are processed to determine the earliest and latest times for which there is aspect information:

$$\text{TIME}_{\text{min}} = \min(\text{TIME}_{\text{acaoff}}) \text{ and} \quad (156)$$

$$\text{TIME}_{\text{max}} = \max(\text{TIME}_{\text{acaoff}}). \quad (157)$$

(b) If

$$\text{OBS_MODE} = \text{pointing or} \quad (158)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (159)$$

and

$$\text{DATAMODE} = \text{CC33_FAINT or} \quad (160)$$

$$\text{DATAMODE} = \text{CC33_GRADED} \quad (161)$$

and

$$\text{acaofffile} \neq \text{none and} \quad (162)$$

$$\text{alignmentfile} \neq \text{none}, \quad (163)$$

then

[†]While it would be better to use $\text{TIME_R0} - (\text{CHIPY_ZO} + 1028) \times \text{TIMEDEL}$ to compare to the `gtis`, the value of `TIME_R0` has not yet been read at this point in the code.

i. RA_c and DEC_c :

The `acaofffile` data are processed to determine the right ascension and declination coordinates near the center of the dither pattern:

$$RA_c = \text{median}(RA_{acaoff}) \text{ and} \quad (164)$$

$$DEC_c = \text{median}(DEC_{acaoff}). \quad (165)$$

ii. $TIME_c$:

The `acaofffile` data are processed to determine the time $TIME_c$ at which the quantity

$$\cos(DEC_{acaoff}) \cos(DEC_c) \cos(RA_{acaoff} - RA_c) + \sin(DEC_{acaoff}) \sin(DEC_c) \quad (166)$$

is maximized (i.e. the time at which the telescope is pointed the closest to (RA_c, DEC_c)).

iii. RA_ADJ_I , DEC_ADJ_I , RA_ADJ_S , DEC_ADJ_S :

The effective values of RA and DEC are computed for the ACIS-I and ACIS-S arrays. These coordinates are used to determine the values of TIME and CHIPY_ADJ.

A. ACIS-I aim point:

For the ACIS-I array, the values of RA_ADJ_I and DEC_ADJ_I are initialized assuming that the source is at the ACIS-I aim point [i.e. that $(TIME, CCD_ID, CHIPX, CHIPY) = (TIME_c, 3, 965, 963)$][‡].

B. ACIS-S aim point:

For the ACIS-S array, the values of RA_ADJ_S and DEC_ADJ_S are initialized assuming that the source is at the ACIS-S aim point [i.e. that $(TIME, CCD_ID, CHIPX, CHIPY) = (TIME_c, 7, 227, 509)$][§].

C. Target location:

For the CCD at the focal point (i.e. CCD_ID_{focus}), the values of CHIPY are computed for each row of the `acaofffile`, assuming that the source is at the location specified by RA_TARG_{in} and DEC_TARG_{in} . These values of CHIPY are referred to as $CHIPY_TARG$. If

$$\text{median}(CHIPY_TARG) \geq 16.5 \text{ and} \quad (167)$$

$$\text{median}(CHIPY_TARG) < 1008.5 \text{ and} \quad (168)$$

$$CCD_ID_{focus} \geq 0 \text{ and} \quad (169)$$

$$CCD_ID_{focus} \leq 3, \quad (170)$$

then

$$RA_ADJ_I = RA_TARG_{in} \text{ and} \quad (171)$$

$$DEC_ADJ_I = DEC_TARG_{in}. \quad (172)$$

If

$$\text{median}(CHIPY_TARG) \geq 16.5 \text{ and} \quad (173)$$

$$\text{median}(CHIPY_TARG) < 1008.5 \text{ and} \quad (174)$$

$$CCD_ID_{focus} \geq 4 \text{ and} \quad (175)$$

$$CCD_ID_{focus} \leq 9, \quad (176)$$

then

$$RA_ADJ_S = RA_TARG_{in} \text{ and} \quad (177)$$

$$DEC_ADJ_S = DEC_TARG_{in}. \quad (178)$$

[‡]As described in the Proposers' Observatory Guide, the location of the aim point on the ACIS-I array has drifted with time. The location used here is within a few dozen pixels of the actual aim point, provided the default `SIM_Y` and `SIM_Z` offsets are used.

[§]Again, the location used here is within a few dozen pixels of the actual aim point, provided the default `SIM_Y` and `SIM_Z` offsets are used.

1.5.3 Loop over events

The following steps are performed, in sequence, for each event.

1. STATUS:

(a) Exists:

If HDU h_{in} of the `infile` includes a 32-bit column named `STATUS`, then

- i. The values of the bits for an event are read from the `infile`.
- ii. The value of `STATUS[k]` is set to zero for bits $k = 1-5, 14, 16-19,$ and 23 (of 0-31), bits that can be set by `acis_process_events`.
- iii. If

$$\text{doevtgrade} = \text{yes}, \tag{179}$$

then the value of `STATUS[20]`, the other bit that can be set by `acis_process_events`, is set to zero.

(b) Does not exist:

If HDU h_{in} does not include a 32-bit column named `STATUS`, then

- i. A set of 32 bits are allocated for the event.
- ii. The values of the 32 bits are initialized to zero.

2. EXPNO:

(a) Read:

The value of `EXPNO` for an event is given by `EXPNOin`.

(b) Validation:

If

$$\text{EXPNO} < 0 \text{ or} \tag{180}$$

$$\text{EXPNO} \geq 10^8, \tag{181}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

3. CCD_ID:

(a) Read:

The value of `CCD_ID` for an event is given by `CCD_IDin`.

(b) Validation:

If

$$\text{CCD_ID} < 0 \text{ or} \tag{182}$$

$$\text{CCD_ID} > 9, \tag{183}$$

then `acis_process_events` exits with an error message because `CCD_ID`-dependent computations could fail if the value of `CCD_ID` is unphysical.

4. CHIPX:

(a) Read:

i. Level 0:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT0}, \quad (184)$$

then the value of `CHIPX` for an event is given by

$$\text{CHIPX} = \text{CCDX}_{\text{in}} + 1. \quad (185)$$

ii. Level 1, 1.5, or 2:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (186)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (187)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2}, \quad (188)$$

then the value of `CHIPX` for an event is given by `CHIPXin`.

(b) Validation:

i. Unphysical:

If

$$\text{CHIPX} < 1 \text{ or} \quad (189)$$

$$\text{CHIPX} > 1024, \quad (190)$$

then `acis_process_events` exits with an error message because `CHIPX`-dependent computations could fail if the value of `CHIPX` is unphysical.

ii. Unexpected:

If

$$\text{CHIPX} = 1 \text{ or} \quad (191)$$

$$\text{CHIPX} = 1024, \quad (192)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

5. `NODE_ID`:

(a) Calculate:

The `NODE_ID` of an event is given by

$$\text{NODE_ID} = \text{int} \left(\frac{\text{CHIPX} - 1}{256} \right), \quad (193)$$

where “int” means the integer portion of (i.e. truncate or round down) the quantity in parentheses.

6. `CHIPY`:

(a) Read:

i. Level 0:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT0}, \quad (194)$$

then

A. TE mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (195)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT_BIAS} \text{ or} \quad (196)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (197)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT}, \quad (198)$$

then the value of CHIPY for an event is given by

$$\text{CHIPY} = \text{CCDY}_{\text{in}} + 1. \quad (199)$$

B. CC mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ or} \quad (200)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (201)$$

then the value of CHIPY for an event is given by

$$\text{CHIPY} = \text{TROW}_{\text{in}} + 1. \quad (202)$$

ii. Level 1, 1.5, or 2:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \text{ or} \quad (203)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ or} \quad (204)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2}, \quad (205)$$

then the value of CHIPY for an event is given by CHIPY_{in} .

(b) Validation:

i. Unphysical:

A. TE mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (206)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT_BIAS} \text{ or} \quad (207)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (208)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT} \quad (209)$$

and

$$\text{CHIPY} < 1 \text{ or} \quad (210)$$

$$\text{CHIPY} > 1024, \quad (211)$$

then `acis_process_events` exits with an error message because CHIPY-dependent computations could fail if the value of CHIPY is unphysical.

B. CC mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ or} \quad (212)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (213)$$

and

$$\text{CHIPY} < 1 \text{ or} \quad (214)$$

$$\text{CHIPY} > 512, \quad (215)$$

then `acis_process_events` exits with an error message because the `CHIPY` value is out of range and `CHIPY`-dependent computations could fail if the value of `CHIPY` is unphysical (especially if it is less than 1).

ii. Unexpected:

A. `FAINT`, `FAINT_BIAS`, or `GRADED`:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (216)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \quad (217)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \quad (218)$$

and

$$\text{CHIPY} = 1 \text{ or} \quad (219)$$

$$\text{CHIPY} = 1024, \quad (220)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

B. `VFAINT`:

If

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (221)$$

and

$$\text{CHIPY} = 1 \text{ or} \quad (222)$$

$$\text{CHIPY} = 2 \text{ or} \quad (223)$$

$$\text{CHIPY} = 1023 \text{ or} \quad (224)$$

$$\text{CHIPY} = 1024, \quad (225)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or another of these conditions is true. Although these values are not unphysical, they should not occur.

C. `CC33_FAINT` or `CC33_GRADED`:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (226)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (227)$$

and

$$\text{CHIPY} = 1 \text{ or} \quad (228)$$

$$\text{CHIPY} = 512, \quad (229)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

7. TG_M:

(a) CC mode with gratings:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (230)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (231)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (232)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (233)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (234)$$

then

i. Read:

The value of TG_M for an event is given by TG_M_{in}.

ii. Validation:

A. If

$$\text{TG_M} < -99, \quad (235)$$

then

$$\text{TG_M} = -99 \quad (236)$$

and `acis_process_events` produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

B. If

$$\text{TG_M} > 99, \quad (237)$$

then

$$\text{TG_M} = 99 \quad (238)$$

and `acis_process_events` produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

8. CHIPY_TG:

(a) CC mode with gratings:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (239)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (240)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (241)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (242)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (243)$$

then

i. Read:

The value of `CHIPY_TG` for an event is given by `CHIPY_TGin`.

ii. Validation:

A. If

$$\text{TG_M} > -99 \text{ and} \quad (244)$$

$$\text{TG_M} < 99 \text{ and} \quad (245)$$

$$\text{CHIPY_TG} \neq \text{NULL} \quad (246)$$

and

$$\text{CHIPY_TG} \leq 0 \text{ or} \quad (247)$$

$$\text{CHIPY_TG} \geq 1025, \quad (248)$$

then `acis_process_events` exits with an error message because `CHIPY_TG`-dependent computations could fail if the value of `CHIPY_TG` is unphysical.

B. If

$$\text{TG_M} > -99 \text{ and} \quad (249)$$

$$\text{TG_M} < 99 \text{ and} \quad (250)$$

$$\text{CHIPY_TG} \neq \text{NULL} \text{ and} \quad (251)$$

$$\text{CHIPY_TG} < 1, \quad (252)$$

then

$$\text{CHIPY_TG} = 1. \quad (253)$$

C. If

$$\text{TG_M} > -99 \text{ and} \quad (254)$$

$$\text{TG_M} < 99 \text{ and} \quad (255)$$

$$\text{CHIPY_TG} \neq \text{NULL} \text{ and} \quad (256)$$

$$\text{CHIPY_TG} > 1024, \quad (257)$$

then

$$\text{CHIPY_TG} = 1024. \quad (258)$$

9. `CHIPY_Z0`:

(a) CC mode with gratings:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (259)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (260)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (261)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (262)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (263)$$

then

i. Read:

The value of `CHIPY_Z0` for an event is given by `CHIPY_Z0in`.

10. `TIME_RO`:

(a) CC mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ or} \quad (264)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (265)$$

then

i. Read:

A. Level 0:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT0}, \quad (266)$$

then the value of `TIME_RO` for an event is given by `TIMEin`.

B. Level 1, 1.5, or 2:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \text{ or} \quad (267)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ or} \quad (268)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (269)$$

and

$$\text{TIME_RO}_{\text{in}} > 0, \quad (270)$$

then

$$\text{TIME_RO} = \text{TIME_RO}_{\text{in}}. \quad (271)$$

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \text{ or} \quad (272)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ or} \quad (273)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (274)$$

and

$$\text{TIME_RO}_{\text{in}} = 0, \quad (275)$$

then

$$\text{TIME_RO} = \text{TIME}_{\text{in}}. \quad (276)$$

ii. Validation:

If

$$\text{TIME_RO} < 0 \text{ or} \quad (277)$$

$$\text{TIME_RO} \geq 3 \times 10^9, \quad (278)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

11. TIME and CHIPY_ADJ:

(a) Read or calculate:

i. TE mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (279)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \quad (280)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (281)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT,} \quad (282)$$

then

$$\text{TIME} = \text{TIME}_{\text{in}} \text{ and} \quad (283)$$

$$\text{CHIPY_ADJ} = \text{CHIPY.} \quad (284)$$

ii. Pointing CC mode with aspect and without grating data:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (285)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (286)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (287)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (288)$$

and

$$\text{CONTENT}_{\text{in}} = \text{EVT0 or} \quad (289)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (290)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (291)$$

and

$$\text{acaofffile} \neq \text{none and} \quad (292)$$

$$\text{alignmentfile} \neq \text{none,} \quad (293)$$

then

A. TIME':

The approximate time of arrival

$$\text{TIME}' = \text{TIME_RO} - (512 + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (294)$$

B. CHIPY_ADJ':

If

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (295)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3, \quad (296)$$

then $\text{CHIPY_ADJ}'$ (the approximate value of CHIPY_ADJ) is given by the CHIPY location (on the focal-point CCD) of the coordinates RA_ADJ_1 and DEC_ADJ_1 using the orientation of

the telescope (i.e. RA, DEC, and ROLL) and the SIM (i.e. DY, DZ, and DTHETA) at the time TIME' . If $\text{TIME}' < \text{TIME}_{\min}$ or $\text{TIME}' \geq \text{TIME}_{\max}$, then TIME_c is used instead of TIME' . If

$$\text{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \quad (297)$$

$$\text{CCD_ID}_{\text{focus}} \leq 9, \quad (298)$$

then $\text{CHIPY_ADJ}'$ is given by the CHIPY location (on the focal-point CCD) of the coordinates RA_ADJ_S and DEC_ADJ_S using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the SIM (i.e. DY, DZ, and DTHETA) at the time TIME' . If $\text{TIME}' < \text{TIME}_{\min}$ or $\text{TIME}' \geq \text{TIME}_{\max}$, then TIME_c is used instead of TIME' .

C. TIME : The value of $\text{CHIPY_ADJ}'$ is used to obtain a better estimate of the time of arrival

$$\text{TIME} = \text{TIME_RO} - (\text{CHIPY_ADJ}' + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (299)$$

D. CHIPY_ADJ : If

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (300)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3, \quad (301)$$

then the value of CHIPY_ADJ is given by the CHIPY location (on the focal-point CCD) of the coordinates RA_ADJ_I and DEC_ADJ_I using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the SIM (i.e. DY, DZ, and DTHETA) at the time TIME . If $\text{TIME} < \text{TIME}_{\min}$ or $\text{TIME} \geq \text{TIME}_{\max}$, then TIME_c is used instead of TIME . If

$$\text{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \quad (302)$$

$$\text{CCD_ID}_{\text{focus}} \leq 9, \quad (303)$$

then the value of CHIPY_ADJ is given by the CHIPY location (on the focal-point CCD) of the coordinates RA_ADJ_S and DEC_ADJ_S using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the SIM (i.e. DY, DZ, and DTHETA) at the time TIME . If $\text{TIME} < \text{TIME}_{\min}$ or $\text{TIME} \geq \text{TIME}_{\max}$, then TIME_c is used instead of TIME .

iii. Pointing CC mode without aspect and without grating data:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (304)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (305)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (306)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (307)$$

and

$$\text{CONTENT}_{\text{in}} = \text{EVT0 or} \quad (308)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (309)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (310)$$

and

$$\text{acaofffile} = \text{none or} \quad (311)$$

$$\text{alignmentfile} = \text{none}, \quad (312)$$

then

$$\text{TIME} = \text{TIME_RO} - (512 + 1028) \times \text{TIMEDEL}_{\text{in}} \text{ and} \quad (313)$$

$$\text{CHIPY_ADJ} = 512. \quad (314)$$

iv. Pointing CC mode with ACIS-S grating data:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (315)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (316)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (317)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (318)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (319)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \quad (320)$$

$$\text{CCD_ID}_{\text{focus}} \leq 9, \quad (321)$$

then

A. Source events in GTIs:

If

$$\text{TG_M} > -99 \text{ and} \quad (322)$$

$$\text{TG_M} < 99 \text{ and} \quad (323)$$

$$\text{CHIPY_TG} \neq \text{NULL} \text{ and} \quad (324)$$

$$\text{TIME_RO} - (\text{CHIPY_TG} + 1028) \times \text{TIMEDEL}_{\text{in}} \geq \text{TIME}_{\text{min}} \text{ and} \quad (325)$$

$$\text{TIME_RO} - (\text{CHIPY_TG} + 1028) \times \text{TIMEDEL}_{\text{in}} < \text{TIME}_{\text{max}} \quad (326)$$

and $\text{TIME_RO} - (\text{CHIPY_TG} + 1028) \times \text{TIMEDEL}_{\text{in}}$ is in a good-time interval, then

$$\text{CHIPY_ADJ} = \text{CHIPY_TG} \text{ and} \quad (327)$$

$$\text{TIME} = \text{TIME_RO} - (\text{CHIPY_ADJ} + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (328)$$

B. Source events not in GTIs:

If

$$\text{TG_M} > -99 \text{ and} \quad (329)$$

$$\text{TG_M} < 99 \quad (330)$$

and

$$\text{CHIPY_TG} = \text{NULL} \text{ or} \quad (331)$$

$$\text{TIME_RO} - (\text{CHIPY_TG} + 1028) \times \text{TIMEDEL}_{\text{in}} < \text{TIME}_{\text{min}} \text{ or} \quad (332)$$

$$\text{TIME_RO} - (\text{CHIPY_TG} + 1028) \times \text{TIMEDEL}_{\text{in}} \geq \text{TIME}_{\text{max}} \quad (333)$$

or $\text{TIME_RO} - (\text{CHIPY_TG} + 1028) \times \text{TIMEDEL}_{\text{in}}$ is not in a good-time interval, then

$$\text{CHIPY_ADJ} = \text{CHIPY_Z0}_{\text{med}} \text{ and} \quad (334)$$

$$\text{TIME} = \text{TIME_RO} - (\text{CHIPY_ADJ} + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (335)$$

C. All background events:

If

$$\text{TG_M} = -99 \text{ or} \quad (336)$$

$$\text{TG_M} = 99 \quad (337)$$

then

$$\text{CHIPY_ADJ} = 512 \text{ and} \quad (338)$$

$$\text{TIME} = \text{TIME_RO} - (\text{CHIPY_ADJ} + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (339)$$

v. Pointing CC mode with aspect and with ACIS-I grating data:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (340)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (341)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (342)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (343)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (344)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (345)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3 \quad (346)$$

and

$$\text{acaofffile} \neq \text{none and} \quad (347)$$

$$\text{alignmentfile} \neq \text{none}, \quad (348)$$

then

A. TIME' :

The approximate time of arrival

$$\text{TIME}' = \text{TIME_RO} - (512 + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (349)$$

B. $\text{CHIPY_ADJ}'$:

$\text{CHIPY_ADJ}'$ (the approximate value of CHIPY_ADJ) is given by the CHIPY location (on the focal-point CCD) of the coordinates RA_ADJ_I and DEC_ADJ_I using the orientation of the telescope (i.e. RA , DEC , and ROLL) and the SIM (i.e. DY , DZ , and DTHETA) at the time TIME' . If TIME' is not in a good-time interval or $\text{TIME}' < \text{TIME}_{\text{min}}$ or $\text{TIME}' \geq \text{TIME}_{\text{max}}$, then TIME_c is used instead of TIME' .

C. TIME :

The value of $\text{CHIPY_ADJ}'$ is used to obtain a better estimate of the time of arrival

$$\text{TIME} = \text{TIME_RO} - (\text{CHIPY_ADJ}' + 1028) \times \text{TIMEDEL}_{\text{in}}. \quad (350)$$

D. CHIPY_ADJ:

The value of CHIPY_ADJ is given by the CHIPY location (on the focal-point CCD) of the coordinates RA_ADJ_I and DEC_ADJ_I using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the SIM (i.e. DY, DZ, and DTHETA) at the time TIME. If TIME is not in a good-time interval or TIME < TIME_{min} or TIME ≥ TIME_{max}, then TIME_c is used instead of TIME.

vi. Pointing CC mode without aspect and with ACIS-I grating data:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (351)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (352)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (353)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (354)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (355)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (356)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3 \quad (357)$$

and

$$\text{acaofffile} = \text{none or} \quad (358)$$

$$\text{alignmentfile} = \text{none,} \quad (359)$$

then

$$\text{TIME} = \text{TIME_RO} - (512 + 1028) \times \text{TIMEDEL}_{\text{in}} \text{ and} \quad (360)$$

$$\text{CHIPY_ADJ} = 512. \quad (361)$$

vii. Secondary CC mode:

If

$$\text{OBS_MODE} \neq \text{pointing and} \quad (362)$$

$$\text{OBS_MODE} \neq \text{POINTING,} \quad (363)$$

then

$$\text{TIME} = \text{TIME_RO} - (512 + 1028) \times \text{TIMEDEL}_{\text{in}} \text{ and} \quad (364)$$

$$\text{CHIPY_ADJ} = 512. \quad (365)$$

(b) Validation:

i. If

$$\text{TIME} < 0 \text{ or} \quad (366)$$

$$\text{TIME} \geq 3 \times 10^9, \quad (367)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

ii. If

$$\text{CHIPY_ADJ} < 0.5 \text{ or} \quad (368)$$

$$\text{CHIPY_ADJ} \geq 1024.5, \quad (369)$$

then `acis_process_events` exits with an error message because `CHIPY_ADJ`-dependent computations could fail if the value of `CHIPY_ADJ` is unphysical.

12. Bad pixel:

(a) If

$$\text{badpixfile} \neq \text{none and} \quad (370)$$

$$\text{badpixfile} \neq \text{NONE} \quad (371)$$

and the `badpixfile` includes a valid HDU h_{badpix} where $\text{CCD_ID}_{\text{badpix}} = \text{CCD_ID}$, then the HDU h_{badpix} is searched as follows to determine if the event should have one or more `STATUS` bits set to one.

i. If $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (372)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (373)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (374)$$

$$\text{TIME} < \text{TIME_STOP}_{\text{badpix},r} \quad (375)$$

and

$$\text{STATUS}_{\text{badpix},r}[5] = 1 \text{ or} \quad (376)$$

$$\text{STATUS}_{\text{badpix},r}[6] = 1 \text{ or} \quad (377)$$

$$\text{STATUS}_{\text{badpix},r}[9] = 1, \quad (378)$$

then

$$\text{STATUS}[0] = 1 \quad (379)$$

for the event. Here $\text{CCD_ID}_{\text{badpix}}$ is the value of the keyword `CCD_ID` in HDU h_{badpix} of the `badpixfile`, $\text{CHIPX}_{\text{badpix},r}[0]$ and $\text{CHIPX}_{\text{badpix},r}[1]$ are the first and second values in the vector column named `CHIPX` of row r of HDU h_{badpix} of the `badpixfile`, and $\text{TIME}_{\text{badpix},r}$ and $\text{TIME_STOP}_{\text{badpix},r}$ are the values in the columns named `TIME` and `TIME_STOP`, respectively, of row r of HDU h_{badpix} of the `badpixfile`.

ii. If $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (380)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (381)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (382)$$

$$\text{TIME} < \text{TIME_STOP}_{\text{badpix},r} \quad (383)$$

and

$$\text{STATUS}_{\text{badpix},r}[0] = 1 \text{ or} \quad (384)$$

$$\text{STATUS}_{\text{badpix},r}[1] = 1 \text{ or} \quad (385)$$

$$\text{STATUS}_{\text{badpix},r}[7] = 1 \text{ or} \quad (386)$$

$$\text{STATUS}_{\text{badpix},r}[11] = 1 \text{ or} \quad (387)$$

$$\text{STATUS}_{\text{badpix},r}[12] = 1 \text{ or} \quad (388)$$

$$\text{STATUS}_{\text{badpix},r}[13] = 1 \text{ or} \quad (389)$$

$$\text{STATUS}_{\text{badpix},r}[14] = 1 \text{ or} \quad (390)$$

$$\text{STATUS}_{\text{badpix},r}[16] = 1, \quad (391)$$

then

$$\text{STATUS}[4] = 1 \quad (392)$$

for the event.

- iii. If $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (393)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (394)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (395)$$

$$\text{TIME} < \text{TIME_STOP}_{\text{badpix},r} \quad (396)$$

and

$$\text{STATUS}_{\text{badpix},r}[8] = 1 \text{ or} \quad (397)$$

$$\text{STATUS}_{\text{badpix},r}[10] = 1, \quad (398)$$

then

$$\text{STATUS}[5] = 1 \quad (399)$$

for the event.

- iv. If $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (400)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (401)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (402)$$

$$\text{TIME} < \text{TIME_STOP}_{\text{badpix},r} \quad (403)$$

and

$$\text{STATUS}_{\text{badpix},r}[3] = 1, \quad (404)$$

then

$$\text{STATUS}[6] = 1 \quad (405)$$

for the event.

- v. If $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (406)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (407)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (408)$$

$$\text{TIME} < \text{TIME_STOP}_{\text{badpix},r} \quad (409)$$

and

$$\text{STATUS}_{\text{badpix},r}[2] = 1 \text{ or} \quad (410)$$

$$\text{STATUS}_{\text{badpix},r}[4] = 1, \quad (411)$$

then

$$\text{STATUS}[8] = 1 \quad (412)$$

for the event.

- vi. If $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (413)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (414)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (415)$$

$$\text{TIME} < \text{TIME_STOP}_{\text{badpix},r} \quad (416)$$

and

$$\text{STATUS}_{\text{badpix},r}[15] = 1, \quad (417)$$

then

$$\text{STATUS}[16] = 1 \quad (418)$$

for the event.

- vii. In summary, the mapping between a bad-pixel STATUS bit and the corresponding event STATUS bit is listed in Table 1.

Table 1: Bad-pixel to event STATUS bit mapping

Bad-pixel STATUS bit	Event STATUS bit
0	4
1	4
2	8
3	6
4	8
5	0
6	0
7	4
8	5
9	0
10	5
11	4
12	4
13	4
14	4
15	16
16	4

13. PHAS:

- (a) If HDU 1 of the `infile` includes the column `PHAS`, then

- i. the values of PHAS for an event are read from the `infile`.
- ii. If $\text{PHAS}[4] < \text{split threshold}$, then $\text{STATUS}[k] = 1$ for bit $k = 1$.
- iii. If $\text{PHAS}[4] \leq \text{PHAS}[j]$ for one or more $j = 0-3$ or $5-8$, then $\text{STATUS}[k] = 1$ for bit $k = 1$.
- iv. If $\text{PHAS}[j] > 4095$ for one or more $j = 0-8$, then $\text{STATUS}[k] = 1$ for bit $k = 2$.

14. PHAS_ADJ:

- (a) If HDU 1 of the `infile` includes $\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ and the parameter `apply_cti` = yes and the `ctifile` and `mtlfile` are specified, then the CTI-adjusted pulse heights are computed as follows.
 - i. The real-valued arrays for the serial CTI adjustment Δ_x , the parallel CTI adjustment Δ_y , and the adjusted pulse heights `PHAS_ADJ` are initialized such that

$$\Delta_x[j] = 0, \quad (419)$$

$$\Delta_y[j] = 0, \text{ and} \quad (420)$$

$$\text{PHAS_ADJ}[j] = \text{PHAS}[j] \quad (421)$$

for every element $j = 0-8$, where the starting point for the adjusted pulse heights are the unadjusted pulse heights `PHAS`. Note that the values of the unadjusted pulse heights `PHAS` remain unchanged to ensure that it is possible to remove the CTI adjustment or to reapply the adjustment if the algorithm or calibration data are modified.

- ii. The CTI iteration counter n is initialized such that

$$n = 1. \quad (422)$$

- iii. The temporary variables Δ'_x , Δ'_y , and `PHAS_ADJ'` are set such that

$$\Delta'_x[j] = \Delta_x[j], \quad (423)$$

$$\Delta'_y[j] = \Delta_y[j], \text{ and} \quad (424)$$

$$\text{PHAS_ADJ}'[j] = \text{PHAS_ADJ}[j] \quad (425)$$

for each element j .

- iv. A. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID` = 0 or 2, then the values of Δ_x are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0], \quad (426)$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[0]s_x\rho_x[0]V_x[0], \quad (427)$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2] - c'_x[1]s_x\rho_x[1]V_x[1], \quad (428)$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3], \quad (429)$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[3]s_x\rho_x[3]V_x[3], \quad (430)$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5] - c'_x[4]s_x\rho_x[4]V_x[4], \quad (431)$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6], \quad (432)$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[6]s_x\rho_x[6]V_x[6], \text{ and} \quad (433)$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8] - c'_x[7]s_x\rho_x[7]V_x[7], \quad (434)$$

where

$$\begin{aligned}
 c_x[j] &= \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 3, 6) \end{array} \right. \\ \text{FRCTRLX} \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{array} \right. \\ \\ c'_x[j] &= \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] < \text{split threshold or} \\ j \rightarrow \text{CHIPX} = 1, 256, 513, \text{ or } 768 \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{array} \right. \\ \text{FRCTRLX} \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{array} \right. \\ \\ s_x &= 1 + \text{TCTIX} (T - \text{FP_TEMPO}), \end{cases} \tag{435}
 \end{aligned}$$

$\left\{ \begin{array}{l} s_x \text{ is a temperature dependent scaling factor,} \\ \text{TCTIX is the CCD_ID dependent value in the column TCTIX of the} \\ \text{ctifile,} \\ \text{FP_TEMPO is the name of a keyword in the ctifile,} \end{array} \right.$

$$T = \left(\frac{t' - t'_k}{t'_{k+1} - t'_k} \right) (\text{FP_TEMP}_{k+1} - \text{FP_TEMP}_k) + \text{FP_TEMP}_k, \tag{436}$$

$\left\{ \begin{array}{l} T \text{ is the time dependent focal plane temperature,} \end{array} \right.$

$$t' = t + \text{TIMEDEL}_{\text{in}} (\text{TIMEPIXR}_{\text{evt}} - 0.5), \tag{437}$$

$\left\{ \begin{array}{l} t \text{ is the TIME of the event,} \\ \text{TIMEPIXR}_{\text{evt}} \text{ is a keyword in the infile,} \end{array} \right.$

$$t'_k = \text{TIME}_k + \text{TIMEDEL}_{\text{mtl}} (\text{TIMEPIXR}_{\text{mtl}} - 0.5), \tag{438}$$

$\left\{ \begin{array}{l} \text{TIME}_k \text{ is the } k^{\text{th}} \text{ element of the column TIME in the mtlfile,} \\ t'_k \leq t', \\ \text{If } t' < t'_k \text{ for } k = 0, \text{ then } k = 0, \\ \text{FP_TEMP}_k \text{ is the } k^{\text{th}} \text{ element of the column FP_TEMP in the mtlfile,} \\ \text{TIMEDEL}_{\text{mtl}} \text{ is a keyword in the mtlfile,} \\ \text{TIMEPIXR}_{\text{mtl}} \text{ is a keyword in the mtlfile,} \end{array} \right.$

$$t'_{k+1} = \text{TIME}_{k+1} + \text{TIMEDEL}_{\text{mtl}} (\text{TIMEPIXR}_{\text{mtl}} - 0.5), \tag{439}$$

$$\rho_x[j] = \begin{cases} \text{TIME}_{k+1} \text{ is the } (k+1)^{\text{th}} \text{ element of the column TIME in the mtlfile,} \\ t'_{k+1} > t', \\ \text{If } t' > t'_k \text{ for } k = n, \text{ where } n \text{ is the last element, then } k = n, \\ \text{FP_TEMP}_{k+1} \text{ is the } (k+1)^{\text{th}} \text{ element of the column FP_TEMP in the} \\ \text{mtlfile,} \end{cases} \quad (440)$$

$$V_x[j] = \begin{cases} \rho_x[j] \text{ depends upon the CCD_ID and upon the CHIPX and nint(CHIPY_ADJ)} \\ \text{coordinates associated with element } j \text{ of PHAS_ADJ}[j] \text{ (see Fig. 1),} \\ \left(\frac{\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME_X}_{l+1} - \text{VOLUME_X}_l) + \\ \text{VOLUME_X}_l, \end{cases} \quad (441)$$

$$\begin{cases} \text{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_l \text{ (and PHA}_{l+1}) \text{ are CCD_ID dependent,} \\ \text{PHA}_l \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If PHA}_l > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \text{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_{l+1} > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If PHA}_{l+1} \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \text{element, then } l = n, \\ \text{VOLUME_X}_l \text{ is the } l^{\text{th}} \text{ element of the column VOLUME_X in the ctifile,} \\ \text{VOLUME_X}_l, \text{ which is CCD_ID dependent, is associated with PHA}_l, \\ \text{VOLUME_X}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column VOLUME_X in the} \\ \text{ctifile, and} \\ \text{VOLUME_X}_{l+1}, \text{ which is CCD_ID dependent, is associated with PHA}_{l+1} \end{cases}$$

- B. If there is a serial CTI trap-density map in the ctifile for CCD_ID and NODE_ID = 1 or 3, then the values of Δ_x are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0] - c'_x[1]s_x\rho_x[1]V_x[1], \quad (442)$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[2]s_x\rho_x[2]V_x[2], \quad (443)$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2], \quad (444)$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3] - c'_x[4]s_x\rho_x[4]V_x[4], \quad (445)$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[5]s_x\rho_x[5]V_x[5], \quad (446)$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5], \quad (447)$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6] - c'_x[7]s_x\rho_x[7]V_x[7], \quad (448)$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[8]s_x\rho_x[8]V_x[8], \text{ and} \quad (449)$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8], \quad (450)$$

where

$$\begin{aligned}
c_x[j] &= \left\{ \begin{array}{l} 0 \\ \text{FRCTRLX} \\ 1 \end{array} \right. \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 2, 5, 8) \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{array} \right. \\
c'_x[j] &= \left\{ \begin{array}{l} 0 \\ \text{FRCTRLX} \\ 1 \end{array} \right. \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] < \text{split threshold or} \\ j \rightarrow \text{CHIPX} = 257, 512, 769, \text{ or } 1024 \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \geq \text{split threshold} \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{array} \right.
\end{aligned}$$

and s_x , T , t' , t'_k , t'_{k+1} , $\rho_x[j]$, and $V_x[j]$ are given by equations. 435, 436, 437, 438, 439, 440, and 441, respectively.

- v. If there is a parallel CTI trap-density map in the `ctifile` for `CCD_ID`, then the values of Δ_y are given by

$$\Delta_y[0] = c_y[0]s_y\rho_y[0]V_y[0], \quad (451)$$

$$\Delta_y[1] = c_y[1]s_y\rho_y[1]V_y[1], \quad (452)$$

$$\Delta_y[2] = c_y[2]s_y\rho_y[2]V_y[2], \quad (453)$$

$$\Delta_y[3] = c_y[3]s_y\rho_y[3]V_y[3] - c'_y[0]s_y\rho_y[0]V_y[0], \quad (454)$$

$$\Delta_y[4] = c_y[4]s_y\rho_y[4]V_y[4] - c'_y[1]s_y\rho_y[1]V_y[1], \quad (455)$$

$$\Delta_y[5] = c_y[5]s_y\rho_y[5]V_y[5] - c'_y[2]s_y\rho_y[2]V_y[2], \quad (456)$$

$$\Delta_y[6] = c_y[6]s_y\rho_y[6]V_y[6] - c'_y[3]s_y\rho_y[3]V_y[3], \quad (457)$$

$$\Delta_y[7] = c_y[7]s_y\rho_y[7]V_y[7] - c'_y[4]s_y\rho_y[4]V_y[4], \text{ and} \quad (458)$$

$$\Delta_y[8] = c_y[8]s_y\rho_y[8]V_y[8] - c'_y[5]s_y\rho_y[5]V_y[5], \quad (459)$$

where

$$\begin{aligned}
c_y[j] &= \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j\text{)}, \\ \text{FRCTRLY} \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \text{(for } j = 3, 4, 5, 6, 7, 8\text{)}, \end{array} \right. \\ \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2\text{)} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \text{(for } j = 3, 4, 5, 6, 7, 8\text{)}, \end{array} \right. \end{cases} \\ \\ c'_y[j] &= \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] < \text{split threshold or} \\ j \rightarrow \text{CHIPY} = 1 \text{ or } 1024 \\ \text{(for } j = 1, 2, 3, 4, 5\text{)}, \\ \text{FRCTRLY} \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2, 3, 4, 5\text{)}, \\ \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2, 3, 4, 5\text{)}, \end{array} \right. \end{cases} \\ \\ s_y &= 1 + \text{TCTIY}(T - \text{FP_TEMPO}), \end{cases} \tag{460}
\end{aligned}$$

$$\begin{cases} s_y \text{ is a temperature dependent scaling factor,} \\ \text{TCTIY is the CCD_ID dependent value in the column TCTIY of the} \\ \text{ctifile,} \\ \text{FP_TEMPO is the name of a keyword in the ctifile,} \end{cases}$$

$$\rho_y[j] = \text{parallel trap density}, \tag{461}$$

$$\begin{cases} \rho_y[j] \text{ depends upon the CCD_ID and upon the CHIPX and nint(CHIPY_ADJ)} \\ \text{coordinates associated with element } j \text{ of PHAS_ADJ}[j] \text{ (see Fig. 1),} \end{cases}$$

$$V_y[j] = \left(\frac{\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME_Y}_{l+1} - \text{VOLUME_Y}_l) + \text{VOLUME_Y}_l, \tag{462}$$

$$\begin{cases} \text{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_l \text{ (and } \text{PHA}_{l+1}\text{) are CCD_ID dependent,} \\ \text{PHA}_l \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_l > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \text{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_{l+1} > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_{l+1} \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \text{element, then } l = n, \\ \text{VOLUME_Y}_l \text{ is the } l^{\text{th}} \text{ element of the column VOLUME_Y in the ctifile,} \\ \text{VOLUME_Y}_l, \text{ which is CCD_ID dependent, is associated with } \text{PHA}_l, \\ \text{VOLUME_Y}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column VOLUME_Y in the} \\ \text{ctifile,} \\ \text{VOLUME_Y}_{l+1}, \text{ which is CCD_ID dependent, is associated with } \text{PHA}_{l+1}, \end{cases}$$

and T , t' , t'_k , and t'_{k+1} , are given by equations. 436, 437, 438, and 439, respectively.
vi. The CTI-adjusted pulse heights

$$\text{PHAS_ADJ}[j] = \text{PHAS}[j] + \Delta_x[j] + \Delta_y[j] \quad (463)$$

for all j .

vii. A. If

$$|\text{PHAS_ADJ}'[j] - \text{PHAS_ADJ}[j]| < \text{cticonverge} \text{ (for all } j \text{) and} \quad (464)$$

$$n \leq \text{max_cti_iter}, \quad (465)$$

then the computation of PHAS_ADJ is complete for the event.

B. If

$$|\text{PHAS_ADJ}'[j] - \text{PHAS_ADJ}[j]| \geq \text{cticonverge} \text{ (for one or more } j \text{) and} \quad (466)$$

$$n < \text{max_cti_iter}, \quad (467)$$

then $n = n + 1$ and steps 1.5.14(a)iii–1.5.14(a)vii are repeated.

C. If

$$|\text{PHAS_ADJ}'[j] - \text{PHAS_ADJ}[j]| \geq \text{cticonverge} \text{ (for one or more } j \text{) and} \quad (468)$$

$$n \geq \text{max_cti_iter}, \quad (469)$$

then no additional iterations are performed, the values of PHAS_ADJ[j] from the most recent iteration are used as are, and STATUS[k] = 1 for bit $k = 20$ to indicate that the CTI adjustment did not converge.

15. FLTGRADE:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ and} \quad (470)$$

$$\text{apply_cti} = \text{yes}, \quad (471)$$

then

$$\text{FLTGRADE} = c_f[0] + 2c_f[1] + 4c_f[2] + 8c_f[3] + 16c_f[5] + 32c_f[6] + 64c_f[7] + 128c_f[8], \quad (472)$$

where

$$c_f[j] = \begin{cases} 0 & \text{if PHAS_ADJ}[j] < \text{split threshold} \\ 1 & \text{otherwise,} \end{cases} \quad (473)$$

and the elements $j = 0-3$ and $5-8$ of PHAS_ADJ are depicted in Figure 1.

(b) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT} \text{ and} \quad (474)$$

$$\text{apply_cti} = \text{no}, \quad (475)$$

then

$$\text{FLTGRADE} = c_f[0] + 2c_f[1] + 4c_f[2] + 8c_f[3] + 16c_f[5] + 32c_f[6] + 64c_f[7] + 128c_f[8], \quad (476)$$

where

$$c_f[j] = \begin{cases} 0 & \text{if PHAS}[j] < \text{split threshold} \\ 0 & \text{if PHAS}[j] > 4095 \\ 0 & \text{if PHAS}[j] > \text{PHAS}[4] \text{ for } j = 0-3 \\ 0 & \text{if PHAS}[j] \geq \text{PHAS}[4] \text{ for } j = 5-8 \\ 1 & \text{otherwise.} \end{cases} \quad (477)$$

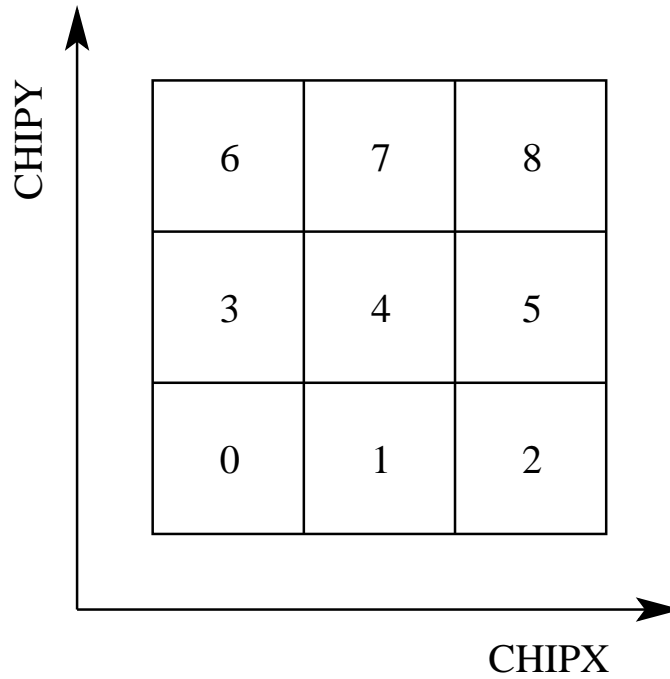


Figure 1: The relative CHIPX and CHIPY coordinates of the nine elements $j = 0-8$ of a $3 \text{ pixel} \times 3 \text{ pixel}$ event island PHAS[j] or PHAS_ADJ[j].

(c) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (478)$$

then the FLTGRADE of an event is equal to the value of FLTGRADE for the event in the `infile`.

16. GRADE:

(a) If the `grade` file is specified, then the GRADE of an event is determined from the FLTGRADE of the event as follows.

- i. The appropriate HDU of the `grade` file is identified. This HDU is the one where the header keyword CBD10001 includes the `DATAMODEin` of HDU 1 of the `infile`.
- ii. The row i of the appropriate HDU of the `grade` file is identified. This row is the one where

$$\text{FLTGRADE}_{\text{grade},i} = \text{FLTGRADE}, \quad (479)$$

where `FLTGRADEgrade` is a column in the `grade` file.

iii. The GRADE of the event is given by

$$\text{GRADE} = \text{GRADE}_{\text{grade},i}, \quad (480)$$

where `GRADEgrade` is a column in the `grade` file.

17. PHA_RO:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}, \quad (481)$$

then

$$\text{PHA_RO} = \sum_{j=0}^8 \beta[j]p[j], \quad (482)$$

where

i.

$$p[j] = \text{PHAS}[j]. \quad (483)$$

ii. The elements $j = 0-8$ of PHAS are depicted in Figure 1.

iii.

$$\beta[j] = 0 \quad \text{if} \quad p[j] < \text{split threshold}. \quad (484)$$

iv.

$$\beta[j] = 0 \quad \text{if} \quad \begin{cases} p[j] > p[4] & (\text{for } j = 0-3) \\ p[j] \geq p[4] & (\text{for } j = 5-8) \end{cases} \quad (485)$$

v. If CORNERS = -1, then

$$\beta[0] = \beta[2] = \beta[6] = \beta[8] = 0. \quad (486)$$

vi. If CORNERS = 0, then there are no additional constraints on $\beta[0]$, $\beta[2]$, $\beta[6]$, and $\beta[8]$.

vii. If CORNERS = 1, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{and} \quad \beta[3] = 0. \quad (487)$$

$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{and} \quad \beta[5] = 0. \quad (488)$$

$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \quad \text{and} \quad \beta[7] = 0. \quad (489)$$

$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \quad \text{and} \quad \beta[7] = 0. \quad (490)$$

viii. If CORNERS = 2, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{or} \quad \beta[3] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (491)$$

$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{or} \quad \beta[5] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (492)$$

$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \quad \text{or} \quad \beta[7] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (493)$$

$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \quad \text{or} \quad \beta[7] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (494)$$

(b) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (495)$$

then

i. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0}, \quad (496)$$

then the value of PHA_RO for the event is the value of PHA in the infile.

ii. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \quad \text{or} \quad (497)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad \text{or} \quad (498)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2}, \quad (499)$$

then the value of PHA_RO for the event is the value of PHA_RO in the infile.

18. PHA, including time-dependent gain:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}, \quad (500)$$

then

$$\text{PHA} = \sum_{j=0}^8 \beta[j]p[j], \quad (501)$$

where

i.

$$p[j] = \begin{cases} \text{PHAS_ADJ}[j] & \text{if } \text{apply_cti} = \text{yes} \\ \text{PHAS}[j] & \text{if } \text{apply_cti} = \text{no} \end{cases} \quad (502)$$

ii. The elements $j = 0-8$ of PHAS_ADJ (or PHAS) are depicted in Figure 1.

iii.

$$\beta[j] = 0 \quad \text{if } p[j] < \text{split threshold}. \quad (503)$$

iv. If the CTI adjustment is not performed, then

$$\beta[j] = 0 \quad \text{if } \begin{cases} p[j] > p[4] & (\text{for } j = 0-3) \\ p[j] \geq p[4] & (\text{for } j = 5-8) \end{cases} \quad (504)$$

v. If CORNERS = -1, then

$$\beta[0] = \beta[2] = \beta[6] = \beta[8] = 0. \quad (505)$$

vi. If CORNERS = 0, then there are no additional constraints on $\beta[0]$, $\beta[2]$, $\beta[6]$, and $\beta[8]$.

vii. If CORNERS = 1, then

$$\beta[0] = 0 \quad \text{if } \beta[1] = 0 \text{ and } \beta[3] = 0. \quad (506)$$

$$\beta[2] = 0 \quad \text{if } \beta[1] = 0 \text{ and } \beta[5] = 0. \quad (507)$$

$$\beta[6] = 0 \quad \text{if } \beta[3] = 0 \text{ and } \beta[7] = 0. \quad (508)$$

$$\beta[8] = 0 \quad \text{if } \beta[5] = 0 \text{ and } \beta[7] = 0. \quad (509)$$

viii. If CORNERS = 2, then

$$\beta[0] = 0 \quad \text{if } \beta[1] = 0 \text{ or } \beta[3] = 0 \text{ or } \text{GRADE} \neq 6. \quad (510)$$

$$\beta[2] = 0 \quad \text{if } \beta[1] = 0 \text{ or } \beta[5] = 0 \text{ or } \text{GRADE} \neq 6. \quad (511)$$

$$\beta[6] = 0 \quad \text{if } \beta[3] = 0 \text{ or } \beta[7] = 0 \text{ or } \text{GRADE} \neq 6. \quad (512)$$

$$\beta[8] = 0 \quad \text{if } \beta[5] = 0 \text{ or } \beta[7] = 0 \text{ or } \text{GRADE} \neq 6. \quad (513)$$

(b) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (514)$$

then the value of PHA for the event is read from the infile.

(c) If

$$\text{apply_tgain} = \text{yes}, \quad (515)$$

then

$$\text{PHA} = \text{PHA} - \text{int} \left[\left(\frac{\text{TIME} - \text{EPOCH1}}{\text{EPOCH2} - \text{EPOCH1}} \right) (\delta_2 - \delta_1) + \delta_1 - \epsilon \right], \quad (516)$$

where

$$\text{int} = \text{the integer portion of (i.e. truncate or round down)}, \quad (517)$$

$$\text{TIME} = \text{the time of the event}, \quad (518)$$

$$\text{EPOCH1} = \text{a keyword in the } \text{tgainfile}, \quad (519)$$

$$\text{EPOCH2} = \text{a keyword in the } \text{tgainfile}, \quad (520)$$

$$\delta_1 = \left(\frac{\text{PHA} - \text{PHA}_m[r]}{\text{PHA}_{m+1}[r] - \text{PHA}_m[r]} \right) (\text{DELTPHA1}_{m+1}[r] - \text{DELTPHA1}_m[r]) + \quad (521)$$

$$\text{DELTPHA1}_m[r], \quad (522)$$

$$\left\{ \begin{array}{l} r \text{ is the row of the } \text{tgainfile} \text{ where} \\ \left\{ \begin{array}{l} \text{CCD_ID}[r] = \text{CCD_ID}, \\ \text{CHIPX_LO}[r] \leq \text{CHIPX}, \\ \text{CHIPX_HI}[r] \geq \text{CHIPX}, \\ \text{CHIPY_LO}[r] \leq \text{nint}(\text{CHIPY_ADJ}), \text{ and} \\ \text{CHIPY_HI}[r] \geq \text{nint}(\text{CHIPY_ADJ}). \end{array} \right. \\ m \text{ is the element of row } r \text{ where} \\ \left\{ \begin{array}{l} \text{PHA}_m[r] \leq \text{PHA} \text{ and} \\ \text{PHA}_{m+1}[r] > \text{PHA}. \\ \text{If } \text{PHA} < \text{PHA}_m[r] \text{ for } m = 0, \text{ then } m = 0. \\ \text{If } \text{PHA} \geq \text{PHA}_m[r] \text{ for } m = M \text{ and } M \text{ is the last element of } \text{PHA}[r], \\ \text{then } m = M - 1. \end{array} \right. \\ \text{The } \text{tgainfile} \text{ includes a binary table with columns named} \\ \text{CCD_ID, CHIPX_LO, CHIPX_HI, CHIPY_LO, CHIPY_HI, PHA, DELTPHA1, and} \\ \text{DELTPHA2.} \end{array} \right. \quad (523)$$

$$\delta_2 = \left(\frac{\text{PHA} - \text{PHA}_m[r]}{\text{PHA}_{m+1}[r] - \text{PHA}_m[r]} \right) (\text{DELTPHA2}_{m+1}[r] - \text{DELTPHA2}_m[r]) + \quad (524)$$

$$\text{DELTPHA2}_m[r], \quad (525)$$

$$\epsilon = \text{is a uniform random deviate in the range } [0, 1), \quad (526)$$

$$\left\{ \begin{array}{l} \text{If } \text{rand_pha} = \text{no}, \text{ then } \epsilon = 0. \end{array} \right. \quad (527)$$

(d) If

$$\text{PHA} \geq 32767, \quad (528)$$

then $\text{STATUS}[k] = 1$ for bit $k = 3$.

19. CORN_PHA:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (529)$$

then the value of CORN_PHA is read from the `infile`.

20. ENERGY:

(a) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and $\text{PHA} > 0$, then

i. The row i in the `gainfile` is identified such that

$$\text{CCD_ID} = \text{CCD_ID}_{\text{gain},i}, \quad (530)$$

$$\text{CHIPX_MIN}_{\text{gain},i} \leq \text{CHIPX} \leq \text{CHIPX_MAX}_{\text{gain},i}, \quad \text{and} \quad (531)$$

$$\text{CHIPY_MIN}_{\text{gain},i} \leq \text{nint}(\text{CHIPY_ADJ}) \leq \text{CHIPY_MAX}_{\text{gain},i}, \quad (532)$$

where $\text{CCD_ID}_{\text{gain}}$, $\text{CHIPX_MIN}_{\text{gain}}$, $\text{CHIPX_MAX}_{\text{gain}}$, $\text{CHIPY_MIN}_{\text{gain}}$, and $\text{CHIPY_MAX}_{\text{gain}}$ are columns in the `gainfile`.

- ii. A uniform random deviate Δp is computed over the interval from $[-0.5, +0.5)$.
- iii. The element j of row i of PHA_{gain} is identified such that

$$\text{PHA}_{\text{gain},i}[j] \leq (\text{PHA} + \Delta p) < \text{PHA}_{\text{gain},i}[j + 1], \quad (533)$$

where PHA_{gain} is a vector column in the `gainfile`. If $\text{PHA} + \Delta p < \text{PHA}_{\text{gain},i}[0]$, then $j = 0$. If $\text{PHA}_{\text{gain},i}[\text{NPOINTS} - 2] \leq \text{PHA} + \Delta p$, then $j = \text{NPOINTS} - 2$, where `NPOINTS` is a column in the `gainfile`.

- iv. The `ENERGY` of an event is computed from the `PHA` of the event:

$$\text{ENERGY} = \left(\frac{\text{PHA} + \Delta p - \text{PHA}_{\text{gain},i}[j]}{\text{PHA}_{\text{gain},i}[j + 1] - \text{PHA}_{\text{gain},i}[j]} \right) (\text{ENERGY}_{\text{gain},i}[j + 1] - \text{ENERGY}_{\text{gain},i}[j]) + \text{ENERGY}_{\text{gain},i}[j], \quad (534)$$

where $\text{ENERGY}_{\text{gain}}$ is a vector column in the `gainfile`.

- v. If $\text{ENERGY} < 0$, then $\text{ENERGY} = 0$.
- (b) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and $\text{PHA} \leq 0$, then $\text{ENERGY} = 0$.
- (c) If the parameter `calculate_pi` = no or if the parameter `gainfile` is not specified, then
 - i. If the `infile` includes the `ENERGY` of an event, then the `ENERGY` of the event is equal to the `ENERGY` in the `infile`.
 - ii. If the `infile` does not include the `ENERGY` of an event, then $\text{ENERGY} = 0$.

21. `PI`:

- (a) If
$$\text{calculate_pi} = \text{yes}, \quad (535)$$

then

- i.

$$\text{PI} = \text{int} \left(\frac{\text{ENERGY}}{\text{pi_bin_width}} \right) + 1, \quad (536)$$

where “int” indicates the integer portion of what is in parentheses (i.e. the value is truncated or rounded down).

- ii. If
$$\text{PI} < 1, \quad (537)$$

then $\text{PI} = 1$.

- iii. If
$$\text{PI} > \text{pi_num_bins}, \quad (538)$$

then $\text{PI} = \text{pi_num_bins}$.

- (b) If
$$\text{calculate_pi} = \text{no} \quad (539)$$

and the `infile` includes the value of `PI` for an event, then the value of `PI` is read from the `infile`.

22. `pix_adj`:

- (a) centroid:
 - If

$$\text{pix_adj} = \text{centroid}, \quad (540)$$

then

$$\text{CHIPX_ADJ} = \text{CHIPX_ADJ} - w'[0] + w'[2] - w'[3] + w'[5] - w'[6] + w'[8], \quad (541)$$

where

$$w'[j] = \frac{w[j]}{\sum_{j=0}^8 w[j]}, \quad (542)$$

$$w[j] = \begin{cases} p[j] & \text{if the pixel is valid} \\ 0 & \text{if the pixel is invalid,} \end{cases} \quad (543)$$

$$p[j] = \begin{cases} \text{PHAS_ADJ}[j] & \text{if apply_cti = yes} \\ \text{PHAS}[j] & \text{if apply_cti = no,} \end{cases} \quad (544)$$

and the pixel is invalid if

$$\beta[j] = 0 \text{ or} \quad (545)$$

$$\text{STATUS}[0] = 1 \text{ or} \quad (546)$$

$$\text{STATUS}[1] = 1 \text{ or} \quad (547)$$

$$\text{STATUS}[2] = 1 \text{ or} \quad (548)$$

$$\text{STATUS}[3] = 1 \text{ or} \quad (549)$$

$$\text{STATUS}[4] = 1 \text{ or} \quad (550)$$

$$\text{STATUS}[11] = 1 \text{ or} \quad (551)$$

$$\text{STATUS}[13] = 1 \text{ or} \quad (552)$$

$$\text{STATUS}[14] = 1 \text{ or} \quad (553)$$

$$\text{STATUS}[15] = 1 \text{ or} \quad (554)$$

$$\text{STATUS}[16] = 1. \quad (555)$$

If

$$\text{DATAMODE} = \text{CC33_FAINT} \text{ or} \quad (556)$$

$$\text{DATAMODE} = \text{CC33_GRADED} \text{ or} \quad (557)$$

$$\text{DATAMODE} = \text{FAINT} \text{ or} \quad (558)$$

$$\text{DATAMODE} = \text{FAINT_BIAS} \text{ or} \quad (559)$$

$$\text{DATAMODE} = \text{GRADED} \text{ or} \quad (560)$$

$$\text{DATAMODE} = \text{VFAINT}, \quad (561)$$

then

$$\text{CHIPY_ADJ} = \text{CHIPY_ADJ} - w'[0] - w'[1] - w'[2] + w'[6] + w'[7] + w'[8]. \quad (562)$$

If

$$\text{DATAMODE} = \text{CC33_FAINT} \text{ or} \quad (563)$$

$$\text{DATAMODE} = \text{CC33_GRADED}, \quad (564)$$

then

$$\text{TIME} = \text{TIME} + (w'[0] + w'[1] + w'[2] - w'[6] - w'[7] - w'[8]) \times \text{TIMEDEL}_{\text{in}}. \quad (565)$$

Note that it is possible for the centroid algorithm to yield an adjustment to `CHIPX_ADJ` and/or `CHIPY_ADJ` that is greater than half a pixel. However, the adjustment cannot equal or exceed one pixel.

(b) edser:

If

$$\text{pix_adj} = \text{edser}, \quad (566)$$

then

$$\text{CHIPX_ADJ} = \text{CHIPX_ADJ} + \left(\frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta X[k+1] - \Delta X[k]) + \Delta X[k], \quad (567)$$

where $E[k]$ and $E[k+1]$ and $\Delta X[k]$ and $\Delta X[k+1]$ are the k and $(k+1)^{th}$ elements of the vector columns $\text{ENERGY}_{\text{subpix}}$ and $\text{CHIPX_OFFSET}_{\text{subpix}}$, respectively. These columns are in the HDU of the `subpixfile` where the value of the keyword `CCD_ID` is equal to the value of the `CCD_ID` of the event. The appropriate row of these columns is the one where $\text{FLTGRADE}_{\text{subpix}} = \text{FLTGRADE}$. The values of k are the ones where

$$\text{ENERGY} \geq E[k] \text{ and} \quad (568)$$

$$\text{ENERGY} < E[k+1]. \quad (569)$$

Note that if

$$\text{ENERGY} \leq E[0], \quad (570)$$

then $k = 0$. Similarly, if

$$\text{ENERGY} \geq E[\text{NPOINTS}_{\text{subpix}} - 2], \quad (571)$$

then $k = \text{NPOINTS}_{\text{subpix}} - 2$. If

$$\text{DATAMODE} = \text{CC33_FAINT} \text{ or} \quad (572)$$

$$\text{DATAMODE} = \text{CC33_GRADED} \text{ or} \quad (573)$$

$$\text{DATAMODE} = \text{FAINT} \text{ or} \quad (574)$$

$$\text{DATAMODE} = \text{FAINT_BIAS} \text{ or} \quad (575)$$

$$\text{DATAMODE} = \text{GRADED} \text{ or} \quad (576)$$

$$\text{DATAMODE} = \text{VF AINT}, \quad (577)$$

then

$$\text{CHIPY_ADJ} = \text{CHIPY_ADJ} + \left(\frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k], \quad (578)$$

where $\Delta Y[k]$ and $\Delta Y[k+1]$ are the k and $(k+1)^{th}$ elements of the vector column $\text{CHIPY_OFFSET}_{\text{subpix}}$. If

$$\text{DATAMODE} = \text{CC33_FAINT} \text{ or} \quad (579)$$

$$\text{DATAMODE} = \text{CC33_GRADED}, \quad (580)$$

then

$$\text{TIME} = \text{TIME} - \left(\left(\frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k] \right) \times \text{TIMEDEL}_{\text{in}}. \quad (581)$$

(c) none:

If

$$\text{pix_adj} = \text{none}, \quad (582)$$

then the values of `CHIPX_ADJ` and `CHIPY_ADJ` remain unchanged.

(d) randomize:

If

$$\text{pix_adj} = \text{randomize}, \quad (583)$$

then

$$\text{CHIPX_ADJ} = \text{CHIPX_ADJ} + \epsilon_x, \quad (584)$$

where ϵ_x is a uniform random deviate in the range $[-0.5, +0.5)$ pixel. If

$$\text{DATAMODE} = \text{CC33_FAINT} \text{ or} \quad (585)$$

$$\text{DATAMODE} = \text{CC33_GRADED} \text{ or} \quad (586)$$

$$\text{DATAMODE} = \text{FAINT} \text{ or} \quad (587)$$

$$\text{DATAMODE} = \text{FAINT_BIAS} \text{ or} \quad (588)$$

$$\text{DATAMODE} = \text{GRADED} \text{ or} \quad (589)$$

$$\text{DATAMODE} = \text{VFAINT}, \quad (590)$$

then

$$\text{CHIPY_ADJ} = \text{CHIPY_ADJ} + \epsilon_y, \quad (591)$$

where ϵ_y is a uniform random deviate in the range $[-0.5, +0.5)$ pixel. If

$$\text{DATAMODE} = \text{CC33_FAINT} \text{ or} \quad (592)$$

$$\text{DATAMODE} = \text{CC33_GRADED}, \quad (593)$$

then

$$\text{TIME} = \text{TIME} - \epsilon_y \times \text{TIMEDEL}_{\text{in}}. \quad (594)$$

(e) If

$$\text{CHIPX_ADJ} < 0.5, \quad (595)$$

then

$$\text{CHIPX_ADJ} = 1. \quad (596)$$

(f) If

$$\text{CHIPX_ADJ} \geq 1024.5, \quad (597)$$

then

$$\text{CHIPX_ADJ} = 1024. \quad (598)$$

(g) If

$$\text{CHIPY_ADJ} < 0.5, \quad (599)$$

then

$$\text{CHIPY_ADJ} = 1. \quad (600)$$

(h) If

$$\text{CHIPY_ADJ} \geq 1024.5, \quad (601)$$

then

$$\text{CHIPY_ADJ} = 1024. \quad (602)$$

23. TDETX and TDETY:

(a) If

$$\text{stop} = \text{tdet or} \quad (603)$$

$$\text{stop} = \text{det or} \quad (604)$$

$$\text{stop} = \text{tan or} \quad (605)$$

$$\text{stop} = \text{sky} \quad (606)$$

then

i. If

$$\text{CONTENT} = \text{EVT0 or} \quad (607)$$

$$\text{CONTENT} = \text{EVT1 or} \quad (608)$$

$$\text{CONTENT} = \text{EVT2,} \quad (609)$$

then the values of TDETX and TDETY are computed using the values of `nint(CHIPX_ADJ)` and `nint(CHIPY_ADJ)`. Here, “nint” indicates that the real-valued coordinate is rounded to the nearest integer.

ii. If

$$\text{CONTENT} = \text{TGEVT1} \quad (610)$$

and

$$\text{CHIPY_Z0} \neq \text{NULL}, \quad (611)$$

then the values of TDETX and TDETY are computed using the values of `nint(CHIPX_ADJ)` and `nint(CHIPY_Z0)`.[¶]

iii. If

$$\text{CONTENT} = \text{TGEVT1} \quad (612)$$

and

$$\text{CHIPY_Z0} = \text{NULL}, \quad (613)$$

then

$$\text{TDETX} = \text{NULL and} \quad (614)$$

$$\text{TDETY} = \text{NULL.} \quad (615)$$

[¶]As requested, the `CHIPY_Z0` coordinate is used instead of the `CHIPY_TG` coordinate.

iv. If

$$\text{acaofffile} \neq \text{none and} \quad (616)$$

$$\text{acaofffile} \neq \text{NONE} \quad (617)$$

and

$$\text{TIME} < \text{TIME}_{\min} \text{ or} \quad (618)$$

$$\text{TIME} \geq \text{TIME}_{\max}, \quad (619)$$

then

$$\text{TDETX} = \text{NULL and} \quad (620)$$

$$\text{TDETY} = \text{NULL.} \quad (621)$$

v. If

$$\text{fltfile} \neq \text{none and} \quad (622)$$

$$\text{fltfile} \neq \text{NONE} \quad (623)$$

and TIME is not in a good-time interval, then

$$\text{TDETX} = \text{NULL and} \quad (624)$$

$$\text{TDETY} = \text{NULL.} \quad (625)$$

24. DETX and DETY:

(a) If

$$\text{stop} = \text{det or} \quad (626)$$

$$\text{stop} = \text{tan or} \quad (627)$$

$$\text{stop} = \text{sky,} \quad (628)$$

then

i. If

$$\text{CONTENT} = \text{EVT0 or} \quad (629)$$

$$\text{CONTENT} = \text{EVT1 or} \quad (630)$$

$$\text{CONTENT} = \text{EVT2,} \quad (631)$$

then the values of DETX and DETY are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_ADJ and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME.

ii. If

$$\text{CONTENT} = \text{TGEVT1} \quad (632)$$

and

$$\text{CHIPY_Z0} \neq \text{NULL,} \quad (633)$$

then the values of DETX and DETY are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_Z0[¶] and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME.

iii. If $\text{CONTENT} = \text{TGEVT1}$ (634)

and

$\text{CHIPY_Z0} = \text{NULL}$, (635)

then

$\text{DETX} = \text{NaN}$ and (636)

$\text{DETY} = \text{NaN}$. (637)

iv. If

$\text{TIME} < \text{TIME}_{\min}$ or (638)

$\text{TIME} \geq \text{TIME}_{\max}$, (639)

then

$\text{DETX} = \text{NaN}$ and (640)

$\text{DETY} = \text{NaN}$. (641)

v. If

$\text{fltfile} \neq \text{none}$ and (642)

$\text{fltfile} \neq \text{NONE}$ (643)

and TIME is not in a good-time interval, then

$\text{DETX} = \text{NaN}$ and (644)

$\text{DETY} = \text{NaN}$. (645)

25. X and Y:

(a) If

$\text{stop} = \text{sky}$, (646)

then

i. If

$\text{CONTENT} = \text{EVT0}$ or (647)

$\text{CONTENT} = \text{EVT1}$ or (648)

$\text{CONTENT} = \text{EVT2}$, (649)

then the values of X and Y are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_ADJ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME .

ii. If

$\text{CONTENT} = \text{TGEVT1}$ (650)

and

$\text{CHIPY_Z0} \neq \text{NULL}$, (651)

then the values of X and Y are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_Z0 and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME .

iii. If $\text{CONTENT} = \text{TGEVT1}$ (652)

and

$\text{CHIPY_Z0} = \text{NULL}$, (653)

then

$X = \text{NaN}$ and (654)

$Y = \text{NaN}$. (655)

iv. If

$\text{TIME} < \text{TIME}_{\min}$ or (656)

$\text{TIME} \geq \text{TIME}_{\max}$, (657)

then

$X = \text{NaN}$ and (658)

$Y = \text{NaN}$. (659)

v. If

$\text{fltfile} \neq \text{none}$ and (660)

$\text{fltfile} \neq \text{NONE}$ (661)

and TIME is not in a good-time interval, then

$X = \text{NaN}$ and (662)

$Y = \text{NaN}$. (663)

SKY_1D:

(a) If

$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or (664)

$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ (665)

and

$\text{stop} = \text{sky}$, (666)

then

i. If

$\text{CONTENT} = \text{EVT0}$ or (667)

$\text{CONTENT} = \text{EVT1}$ or (668)

$\text{CONTENT} = \text{EVT2}$, (669)

then the value of SKY_1D is computed using the real-valued coordinates CHIPX_ADJ and CHIPY_ADJ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME .

ii. If

$$\text{CONTENT} = \text{TGEVT1} \tag{670}$$

and

$$\text{CHIPY_Z0} \neq \text{NULL}, \tag{671}$$

then the value of SKY_1D is computed using the real-valued coordinates CHIPX_ADJ and CHIPY_Z0[¶] and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

iii. If

$$\text{CONTENT} = \text{TGEVT1} \tag{672}$$

and

$$\text{CHIPY_Z0} = \text{NULL}, \tag{673}$$

then

$$\text{SKY_1D} = \text{NaN}. \tag{674}$$

iv. If

$$\text{TIME} < \text{TIME}_{\min} \text{ or} \tag{675}$$
$$\text{TIME} \geq \text{TIME}_{\max}, \tag{676}$$

then

$$\text{SKY_1D} = \text{NaN}. \tag{677}$$

v. If

$$\text{fltfile} \neq \text{none and} \tag{678}$$
$$\text{fltfile} \neq \text{NONE} \tag{679}$$

and TIME is not in a good-time interval, then

$$\text{SKY_1D} = \text{NaN}. \tag{680}$$

1.5.4 Write outfile

1. PIX_ADJ:

(a) If

$$\text{pix_adj} = \text{centroid}, \tag{681}$$

then

$$\text{PIX_ADJ} = \text{CENTROID}. \tag{682}$$

(b) If

$$\text{pix_adj} = \text{edser}, \tag{683}$$

then

$$\text{PIX_ADJ} = \text{EDSER}. \tag{684}$$

(c) If $\text{pix_adj} = \text{none},$ (685)

then $\text{PIX_ADJ} = \text{NONE}.$ (686)

(d) If $\text{pix_adj} = \text{randomize},$ (687)

then $\text{PIX_ADJ} = \text{RANDOMIZE}.$ (688)

2. RAND_SKY:

(a) If $\text{pix_adj} = \text{centroid},$ (689)

then $\text{RAND_SKY} = 0.0.$ (690)

(b) If $\text{pix_adj} = \text{edser},$ (691)

then $\text{RAND_SKY} = 0.0.$ (692)

(c) If $\text{pix_adj} = \text{none},$ (693)

then $\text{RAND_SKY} = 0.0.$ (694)

(d) If $\text{pix_adj} = \text{randomize},$ (695)

then $\text{RAND_SKY} = 0.5.$ (696)

3. TIME_ADJ:

(a) TE mode:

If $\text{DATAMODE}_{\text{in}} = \text{FAINT or}$ (697)

$\text{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or}$ (698)

$\text{DATAMODE}_{\text{in}} = \text{GRADED or}$ (699)

$\text{DATAMODE}_{\text{in}} = \text{VFAINT},$ (700)

then $\text{TIME_ADJ} = \text{NONE}.$ (701)

(b) Pointing CC mode without grating data:

i. If

$$\text{OBS_MODE} = \text{pointing or} \quad (702)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (703)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (704)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (705)$$

and

$$\text{CONTENT}_{\text{in}} = \text{EVT0 or} \quad (706)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (707)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (708)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (709)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3 \quad (710)$$

and

$$\cos(\text{DEC_ADJ}_I) \cos(\text{DEC_TARG}_{\text{in}}) \cos(\text{RA_ADJ}_I - \text{RA_TARG}_{\text{in}}) + \quad (711)$$

$$\sin(\text{DEC_ADJ}_I) \sin(\text{DEC_TARG}_{\text{in}}) < \quad (712)$$

$$4.855 \times 10^{-11}, \quad (713)$$

then

$$\text{TIME_ADJ} = \text{TARGET}. \quad (714)$$

ii. If

$$\text{OBS_MODE} = \text{pointing or} \quad (715)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (716)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (717)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (718)$$

and

$$\text{CONTENT}_{\text{in}} = \text{EVT0 or} \quad (719)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (720)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (721)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \quad (722)$$

$$\text{CCD_ID}_{\text{focus}} \leq 9 \quad (723)$$

and

$$\cos(\text{DEC_ADJ}_S) \cos(\text{DEC_TARG}_{in}) \cos(\text{RA_ADJ}_S - \text{RA_TARG}_{in}) + \quad (724)$$

$$\sin(\text{DEC_ADJ}_S) \sin(\text{DEC_TARG}_{in}) < \quad (725)$$

$$4.855 \times 10^{-11}, \quad (726)$$

then

$$\text{TIME_ADJ} = \text{TARGET}. \quad (727)$$

iii. If

$$\text{OBS_MODE} = \text{pointing or} \quad (728)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (729)$$

and

$$\text{DATAMODE}_{in} = \text{CC33_FAINT or} \quad (730)$$

$$\text{DATAMODE}_{in} = \text{CC33_GRADED} \quad (731)$$

and

$$\text{CONTENT}_{in} = \text{EVT0 or} \quad (732)$$

$$\text{CONTENT}_{in} = \text{EVT1 or} \quad (733)$$

$$\text{CONTENT}_{in} = \text{EVT2} \quad (734)$$

and

$$\text{CCD_ID}_{focus} \geq 0 \text{ and} \quad (735)$$

$$\text{CCD_ID}_{focus} \leq 3 \quad (736)$$

and

$$\cos(\text{DEC_ADJ}_I) \cos(\text{DEC_TARG}_{in}) \cos(\text{RA_ADJ}_I - \text{RA_TARG}_{in}) + \quad (737)$$

$$\sin(\text{DEC_ADJ}_I) \sin(\text{DEC_TARG}_{in}) \geq \quad (738)$$

$$4.855 \times 10^{-11}, \quad (739)$$

then

$$\text{TIME_ADJ} = \text{AIMPOINT}. \quad (740)$$

iv. If

$$\text{OBS_MODE} = \text{pointing or} \quad (741)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (742)$$

and

$$\text{DATAMODE}_{in} = \text{CC33_FAINT or} \quad (743)$$

$$\text{DATAMODE}_{in} = \text{CC33_GRADED} \quad (744)$$

and

$$\text{CONTENT}_{in} = \text{EVT0 or} \quad (745)$$

$$\text{CONTENT}_{in} = \text{EVT1 or} \quad (746)$$

$$\text{CONTENT}_{in} = \text{EVT2} \quad (747)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \quad (748)$$

$$\text{CCD_ID}_{\text{focus}} \leq 9 \quad (749)$$

and

$$\cos(\text{DEC_ADJ}_S) \cos(\text{DEC_TARG}_{\text{in}}) \cos(\text{RA_ADJ}_S - \text{RA_TARG}_{\text{in}}) + \quad (750)$$

$$\sin(\text{DEC_ADJ}_S) \sin(\text{DEC_TARG}_{\text{in}}) \geq \quad (751)$$

$$4.855 \times 10^{-11}, \quad (752)$$

then

$$\text{TIME_ADJ} = \text{AIMPOINT}. \quad (753)$$

(c) Pointing CC mode with ACIS-S grating data:

If

$$\text{OBS_MODE} = \text{pointing or} \quad (754)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (755)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (756)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (757)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (758)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \quad (759)$$

$$\text{CCD_ID}_{\text{focus}} \leq 9, \quad (760)$$

then

$$\text{TIME_ADJ} = \text{GRATING}. \quad (761)$$

(d) Pointing CC mode with ACIS-I grating data:

i. If

$$\text{OBS_MODE} = \text{pointing or} \quad (762)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (763)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (764)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (765)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (766)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (767)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3 \quad (768)$$

and

$$\cos(\text{DEC_ADJ}_I) \cos(\text{DEC_TARG}_{\text{in}}) \cos(\text{RA_ADJ}_I - \text{RA_TARG}_{\text{in}}) + \quad (769)$$

$$\sin(\text{DEC_ADJ}_I) \sin(\text{DEC_TARG}_{\text{in}}) < \quad (770)$$

$$4.855 \times 10^{-11}, \quad (771)$$

then

$$\text{TIME_ADJ} = \text{TARGET}. \quad (772)$$

ii. If

$$\text{OBS_MODE} = \text{pointing or} \quad (773)$$

$$\text{OBS_MODE} = \text{POINTING} \quad (774)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (775)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \quad (776)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (777)$$

and

$$\text{CCD_ID}_{\text{focus}} \geq 0 \text{ and} \quad (778)$$

$$\text{CCD_ID}_{\text{focus}} \leq 3 \quad (779)$$

and

$$\cos(\text{DEC_ADJ}_I) \cos(\text{DEC_TARG}_{\text{in}}) \cos(\text{RA_ADJ}_I - \text{RA_TARG}_{\text{in}}) + \quad (780)$$

$$\sin(\text{DEC_ADJ}_I) \sin(\text{DEC_TARG}_{\text{in}}) \geq \quad (781)$$

$$4.855 \times 10^{-11}, \quad (782)$$

then

$$\text{TIME_ADJ} = \text{AIMPOINT}. \quad (783)$$

(e) Secondary CC mode:

If

$$\text{OBS_MODE} \neq \text{pointing and} \quad (784)$$

$$\text{OBS_MODE} \neq \text{POINTING} \quad (785)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (786)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \quad (787)$$

then

$$\text{TIME_ADJ} = \text{MIDCHIP}. \quad (788)$$

2 TBD

- Complete the spec to include all of the timed exposure mode processing.
- Complete sections 1.1, 1.2, 1.3, and 1.4.
- Should CONTENTs other than EVT0, EVT1, TGEVT1, and EVT2 be included?
- Should CONTENT = EVT2 be dropped?
- Should DATAMODEs other than CC33_FAINT, CC33_GRADED, FAINT, FAINT_BIAS, GRADED, and VFaint be included?
- Are the RA_TARG, DEC_TARG, RA_NOM, DEC_NOM, and TIMEDEL keywords in the output of afe (need obsfile sometimes)?
- What if TIME_RO is not in the infile (output of afe? EVT2 files)?
- What if a small fraction of the values of CHIPY_TARG are off the chip due to bad aspect?
- Make sure that the STATUS bits are unset and reset properly.
- What about aoff and soff files instead of asol files?
- Are the β in PHA_RO the same as the β in PHA?
- Should something be done about SKY_1D?