MIT Kavli Institute Chandra X-Ray Center

MEMORANDUM
August 15, 2015

To:	Jonathan McDowell, SDS Group Leader
From:	Glenn E. Allen, SDS
Subject:	`acis_process_events` spec
Revision:	3.39
URL:	http://space.mit.edu/CXC/docs/docs.html#ape
File:	/nfs/inconceivable/d0/sds/specs/acis_process_events/ape_spec_3.39.tex

1 `acis_process_events`

This spec, which is incomplete, describes some of processing steps for continuous-clocking mode data.

1.1 Description

1.2 Input

1.3 Output

1.4 Parameters

1.5 Processing

1.5.1 Error checking

The following steps are performed once prior to the processing of the data for each input ACIS event.

1. `obsfile`:
   (a) Validation:
      i. Existence:
      If

$$\texttt{obsfile} \neq \text{none and} \tag{1}$$
$$\texttt{obsfile} \neq \text{NONE} \tag{2}$$

      and the `obsfile` does not exist, then `obsfile` is changed to "none" and `acis_process_events` produces a warning message.

ii. Permission:
If

$$\texttt{obsfile} \neq \text{none and} \tag{3}$$
$$\texttt{obsfile} \neq \text{NONE} \tag{4}$$

and the file permissions do not allow the `obsfile` to be read, then `obsfile` is changed to "none" and `acis_process_events` produces a warning message.

iii. `OBS_MODE`:
If

$$\texttt{obsfile} \neq \text{none and} \tag{5}$$
$$\texttt{obsfile} \neq \text{NONE,} \tag{6}$$

then

A. If the `obsfile` does not include the keyword `obs_mode`, then `OBS_MODE` is set to "none".

B. If the `obsfile` includes the keyword `obs_mode` and

$$\texttt{obs_mode} = \text{pointing or} \tag{7}$$
$$\texttt{obs_mode} = \text{POINTING or} \tag{8}$$
$$\texttt{obs_mode} = \text{secondary or} \tag{9}$$
$$\texttt{obs_mode} = \text{SECONDARY,} \tag{10}$$

then `OBS_MODE` is set to the value of `obs_mode`. Hereafter this keyword is referred to as `OBS_MODE`.

C. If the `obsfile` includes the keyword `obs_mode` and

$$\texttt{obs_mode} \neq \text{pointing and} \tag{11}$$
$$\texttt{obs_mode} \neq \text{POINTING and} \tag{12}$$
$$\texttt{obs_mode} \neq \text{secondary and} \tag{13}$$
$$\texttt{obs_mode} \neq \text{SECONDARY,} \tag{14}$$

then `OBS_MODE` is set to "none".

2. `acaofffile`:

(a) Validation:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{15}$$
$$\texttt{OBS_MODE} = \text{POINTING,} \tag{16}$$

then

i. Setting:
If

$$\texttt{acaofffile} = \text{none or} \tag{17}$$
$$\texttt{acaofffile} = \text{NONE,} \tag{18}$$

then `acis_process_events` produces a warning message.

ii. Existence:
If

$$\texttt{acaofffile} \neq \text{none and} \tag{19}$$
$$\texttt{acaofffile} \neq \text{NONE} \tag{20}$$

and the `acaofffile` does not exist, then `acis_process_events` produces a warning and `acaofffile` is set to "none."

iii. Permission:
If the `acaofffile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

iv. `CONTENT`:
If the `acaofffile` does not have an HDU h_{acaoff} with the keyword

$$\texttt{CONTENT} = \text{ASPSOL}, \tag{21}$$

then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

v. Keyword:
If HDU h_{acaoff} of the `acaofffile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

vi. Columns:
If HDU h_{acaoff} of the `acaofffile` does not include the columns `TIME`, `RA`, `DEC`, and `ROLL` then `acis_process_events` produces a warning message and `acaofffile` is set to "none." Hereafter, these columns are referred to as $\texttt{TIME}_{\text{acaoff}}$, $\texttt{RA}_{\text{acaoff}}$, $\texttt{DEC}_{\text{acaoff}}$, and $\texttt{ROLL}_{\text{acaoff}}$.

vii. Sequential:
If more than one valid `acaofffile` is specified and the the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

3. `alignmentfile`:

(a) Validation:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{22}$$
$$\texttt{OBS_MODE} = \text{POINTING}, \tag{23}$$

then

i. Setting:
If

$$\texttt{alignmentfile} = \text{none or} \tag{24}$$
$$\texttt{alignmentfile} = \text{NONE}, \tag{25}$$

then `acis_process_events` produces a warning message.

ii. Existence:
If

$$\texttt{alignmentfile} \neq \text{none and} \tag{26}$$
$$\texttt{alignmentfile} \neq \text{NONE} \tag{27}$$

and the `alignmentfile` does not exist, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

iii. Permission:
If the `alignmentfile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

iv. `CONTENT`:
If the `alignmentfile` does not have an HDU $h_{\text{alignment}}$ with the keyword

$$\texttt{CONTENT} = \text{ASPSOL}, \tag{28}$$

then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

v. Keyword:
If HDU $h_{\text{alignment}}$ of the `alignmentfile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

vi. Columns:
If HDU $h_{\text{alignment}}$ of the `alignmentfile` does not include the columns `DY`, `DZ`, and `DTHETA` then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

vii. Sequential:
If more than one valid `alignmentfile` is specified and the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

4. `fltfile`:

(a) Validation:

i. Existence:
If

$$\texttt{fltfile} \neq \text{none and} \tag{29}$$
$$\texttt{fltfile} \neq \text{NONE} \tag{30}$$

and the `fltfile` does not exist, then `acis_process_events` produces a warning message and `fltfile` is set to "none.".

ii. Permission:
If the `fltfile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `fltfile` is set to "none.".

iii. `CONTENT`:
If the `fltfile` does not have one or more HDUs h_{flt} with the keyword

$$\texttt{CONTENT} = \text{GTI}, \tag{31}$$

then `acis_process_events` produces a warning message and `fltfile` is set to "none.".

iv. Columns:
If the HDUs h_{flt} of the `fltfile` do not include the columns `START` and `STOP`, then `acis_process_events` produces a warning message and `fltfile` is set to "none.".

5. `infile`:

(a) Existence:
If the `infile` does not exist, then `acis_process_events` exits with an error message.

(b) Permission:
If the `infile` exists and the file permissions do not allow it to be read, then `acis_process_events` exits with an error message.

(c) Validation:

i. OBS_MODE:
If OBS_MODE = none, then

A. The OBS_MODE is read from the HDU $h_{\rm in}$ keyword of the same name. Hereafter this keyword is referred to as OBS_MODE.

B. If the HDU $h_{\rm in}$ does not include the keyword OBS_MODE, then OBS_MODE is set to "none" and acis_process_events produces a warning message.

C. If the HDU $h_{\rm in}$ includes the keyword OBS_MODE and

$$\texttt{obs_mode} \neq \text{pointing and} \tag{32}$$
$$\texttt{obs_mode} \neq \text{POINTING and} \tag{33}$$
$$\texttt{obs_mode} \neq \text{secondary and} \tag{34}$$
$$\texttt{obs_mode} \neq \text{SECONDARY,} \tag{35}$$

then OBS_MODE is set to "none" and acis_process_events produces a warning message.

ii. DATAMODE:
The DATAMODE is read from the HDU $h_{\rm in}$ keyword of the same name. If the HDU $h_{\rm in}$ does not include the keyword DATAMODE or if

$$\texttt{DATAMODE} \neq \text{CC33_FAINT and} \tag{36}$$
$$\texttt{DATAMODE} \neq \text{CC33_GRADED and} \tag{37}$$
$$\texttt{DATAMODE} \neq \text{FAINT and} \tag{38}$$
$$\texttt{DATAMODE} \neq \text{FAINT_BIAS and} \tag{39}$$
$$\texttt{DATAMODE} \neq \text{GRADED and} \tag{40}$$
$$\texttt{DATAMODE} \neq \text{VFAINT,} \tag{41}$$

then acis_process_events exits with an error message. Hereafter, the value of this keyword is referred to as $\texttt{DATAMODE}_{\rm in}$.

iii. CONTENT:
If the infile does not have an HDU $h_{\rm in}$ with the keyword

$$\texttt{CONTENT} = \text{EVT0 or} \tag{42}$$
$$\texttt{CONTENT} = \text{EVT1 or} \tag{43}$$
$$\texttt{CONTENT} = \text{TGEVT1 or} \tag{44}$$
$$\texttt{CONTENT} = \text{EVT2,} \tag{45}$$

then acis_process_events exits with an error message. Hereafter, the value of this keyword is referred to as $\texttt{CONTENT}_{\rm in}$.

iv. TIME:
If HDU $h_{\rm in}$ of the infile does not include the column TIME, then acis_process_events exits with an error message. Hereafter, this column is referred to as $\texttt{TIME}_{\rm in}$.

v. TIME_RO:
If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{46}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{47}$$

and

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{48}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{49}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{50}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `TIME_RO`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{TIME_RO}_{\rm in}$.

vi. `EXPNO`:
If HDU $h_{\rm in}$ the `infile` does not include the column `EXPNO`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{EXPNO}_{\rm in}$.

vii. `CCD_ID`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{51}$$

and HDU $h_{\rm in}$ of the `infile` does not include the keyword `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this keyword is referred to as $\texttt{CCD_ID}_{\rm in}$.

B. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{52}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{53}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{54}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CCD_ID}_{\rm in}$.

viii. `CCDX`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{55}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CCDX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CCDX}_{\rm in}$.

ix. `CHIPX`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{56}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{57}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{58}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CHIPX}_{\rm in}$.

x. `CCDY`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{59}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{60}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{61}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED or} \tag{62}$$
$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT} \tag{63}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CCDY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CCDY}_{\rm in}$.

xi. `TROW`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{64}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{65}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{66}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `TROW`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{TROW}_{\rm in}$.

xii. `CHIPY`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{67}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{68}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{69}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CHIPY}_{\rm in}$.

xiii. `TIMEDEL`:

If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{70}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{71}$$

and HDU $h_{\rm in}$ of the `infile` does not include the keyword `TIMEDEL`, then `acis_process_events` exits with an error message. Hereafter this keyword is referred to as $\texttt{TIMEDEL}_{\rm in}$.

xiv. `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, `DEC_PNT`, `CHIPY_TG`, `CHIPY_ZO`, and `TG_M`:

If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{72}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{73}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{74}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED,} \tag{75}$$

then

A. `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, `DEC_PNT`:

If HDU $h_{\rm in}$ of the `infile` does not include the keywords `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, and `DEC_PNT`, then `acis_process_events` exits with an error message. Hereafter these keywords are referred to as $\texttt{RA_TARG}_{\rm in}$, $\texttt{DEC_TARG}_{\rm in}$, $\texttt{RA_NOM}_{\rm in}$, $\texttt{DEC_NOM}_{\rm in}$, $\texttt{RA_PNT}_{\rm in}$, and $\texttt{DEC_PNT}_{\rm in}$, respectively.

B. `CHIPY_TG`, `CHIPY_ZO`, and `TG_M`:

If

$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1} \tag{76}$$

and HDU $h_{\rm in}$ of the `infile` does not include the columns `CHIPY_TG`, `CHIPY_ZO`, and `TG_M`, then `acis_process_events` exits with an error message. Hereafter these columns are referred to as $\texttt{CHIPY_TG}_{\rm in}$, $\texttt{CHIPY_ZO}_{\rm in}$, and $\texttt{TG_M}_{\rm in}$, respectively.

6. `stop`:

   (a) Lowercase:
   The parameter string is converted to contain only lower case letters.

   (b) Validation:

      i. Setting:
      If

$$\texttt{stop} \neq \text{none and} \tag{77}$$
$$\texttt{stop} \neq \text{chip and} \tag{78}$$
$$\texttt{stop} \neq \text{tdet and} \tag{79}$$
$$\texttt{stop} \neq \text{det and} \tag{80}$$
$$\texttt{stop} \neq \text{tan and} \tag{81}$$
$$\texttt{stop} \neq \text{sky,} \tag{82}$$

      then `stop` is changed to "none" and `acis_process_events` produces a warning message.

      ii. `OBS_MODE`:
      If

$$\texttt{OBS_MODE} \neq \text{pointing and} \tag{83}$$
$$\texttt{OBS_MODE} \neq \text{POINTING} \tag{84}$$

      and

$$\texttt{stop} \neq \text{none and} \tag{85}$$
$$\texttt{stop} \neq \text{chip and} \tag{86}$$
$$\texttt{stop} \neq \text{tdet,} \tag{87}$$

      then `stop` is changed to "none" and `acis_process_events` produces a warning message.

      iii. `acaofffile`:
      If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{88}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{89}$$

      and

$$\texttt{acaofffile} = \text{none and} \tag{90}$$
$$\texttt{stop} \neq \text{none and} \tag{91}$$
$$\texttt{stop} \neq \text{chip and} \tag{92}$$
$$\texttt{stop} \neq \text{tdet,} \tag{93}$$

      then `acis_process_events` produces a warning message and `stop` is changed to "none."

      iv. `alignmentfile`:
      If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{94}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{95}$$

and

$$\texttt{alignmentfile} = \text{none and} \tag{96}$$
$$\texttt{stop} \neq \text{none and} \tag{97}$$
$$\texttt{stop} \neq \text{chip and} \tag{98}$$
$$\texttt{stop} \neq \text{tdet,} \tag{99}$$

then `acis_process_events` produces a warning message and `stop` is changed to "none."

7. `doevtgrade`:

   (a) Lowercase:
   The parameter string is converted to contain only lower case letters.

   (b) Validation:
   If

$$\texttt{doevtgrade} \neq \text{yes and} \tag{100}$$
$$\texttt{doevtgrade} \neq \text{no,} \tag{101}$$

   then `acis_process_events` exits with an error message.

8. `apply_cti`:

   (a) Lowercase:
   The parameter string is converted to contain only lower case letters.

   (b) Validation:

      i. Setting:
      If

$$\texttt{apply_cti} \neq \text{yes and} \tag{102}$$
$$\texttt{apply_cti} \neq \text{no,} \tag{103}$$

      then `acis_process_events` exits with an error message.

      ii. `PHAS`:
      If

$$\texttt{apply_cti} = \text{yes} \tag{104}$$

      and the `infile` does not include the column `PHAS`, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

      iii. `doevtgrade`:
      If

$$\texttt{apply_cti} = \text{yes and} \tag{105}$$
$$\texttt{doevtgrade} = \text{no,} \tag{106}$$

      then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

9. `badpixfile`:

   (a) Validation:

i. Existence:
If

$$\texttt{badpixfile} \neq \text{none and} \tag{107}$$
$$\texttt{badpixfile} \neq \text{NONE} \tag{108}$$

and the `badpixfile` does not exist, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message.

ii. Permission:
If

$$\texttt{badpixfile} \neq \text{none and} \tag{109}$$
$$\texttt{badpixfile} \neq \text{NONE} \tag{110}$$

and the file permissions do not allow it to be read, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message.

iii. `CONTENT`:
If

$$\texttt{badpixfile} \neq \text{none and} \tag{111}$$
$$\texttt{badpixfile} \neq \text{NONE} \tag{112}$$

and the `badpixfile` does not have one or more HDUs h_{badpix} with the keyword

$$\texttt{CONTENT} = \text{BADPIX or} \tag{113}$$
$$\texttt{CONTENT} = \text{CDB_ACIS_BADPIX,} \tag{114}$$

then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message.

iv. Keyword:
If

$$\texttt{badpixfile} \neq \text{none and} \tag{115}$$
$$\texttt{badpixfile} \neq \text{NONE} \tag{116}$$

and the HDU(s) h_{badpix} of the `badpixfile` do not include the keyword `CCD_ID`, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message. Hereafter this keyword is referred to as $\texttt{CCD_ID}_{\text{badpix}}$.

v. Columns:
If

$$\texttt{badpixfile} \neq \text{none and} \tag{117}$$
$$\texttt{badpixfile} \neq \text{NONE} \tag{118}$$

and the HDU(s) h_{badpix} of the `badpixfile` do not include the columns `CHIPX`, `CHIPY`, `TIME`, `TIME_STOP`, and `STATUS`, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message. Hereafter these columns are referred to as $\texttt{CHIPX}_{\text{badpix}}$, $\texttt{CHIPY}_{\text{badpix}}$, $\texttt{TIME}_{\text{badpix}}$, $\texttt{TIME_STOP}_{\text{badpix}}$, and $\texttt{STATUS}_{\text{badpix}}$, respectively.

10. `ctifile`:

(a) Validation:
If

$$\texttt{ctifile} \neq \text{caldb and} \tag{119}$$
$$\texttt{ctifile} \neq \text{CALDB}, \tag{120}$$

then

i. Existence:
If the `ctifile` does not exist, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

ii. Permission:
If the `ctifile` exists and the file permissions do not allow it to be read, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

iii. `CONTENT`:
If the `ctifile` does not have one or more HDUs h_{cti} with the keyword

$$\texttt{CONTENT} = \text{CDB_ACIS_CTI}, \tag{121}$$

then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

iv. Columns:
If the first such HDU of the `ctifile` does not include the columns `CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `PHA`, `VOLUME_X`, `VOLUME_Y`, `FRCTRLX`, `FRCTRLY`, `TCTIX`, and `TCTIY`, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

11. `clobber`:

(a) Lowercase:
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:
If

$$\texttt{clobber} \neq \text{yes and} \tag{122}$$
$$\texttt{clobber} \neq \text{no}, \tag{123}$$

then `clobber` is changed to "no" and `acis_process_events` produces a warning message.

ii. Permission:
If

$$\texttt{clobber} = \text{yes} \tag{124}$$

and the `outfile` exists and the file permissions of the `outfile` do not allow it to be overwritten, then `acis_process_events` exits with an error message.

iii. Don't overwrite:
If

$$\texttt{clobber} = \text{no} \tag{125}$$

and the `outfile` exists, then `acis_process_events` exits with an error message.

12. `pix_adj`:

(a) Lowercase:
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:
If

$$\texttt{pix_adj} \neq \text{centroid and} \tag{126}$$
$$\texttt{pix_adj} \neq \text{edser and} \tag{127}$$
$$\texttt{pix_adj} \neq \text{none and} \tag{128}$$
$$\texttt{pix_adj} \neq \text{randomize,} \tag{129}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:
If

$$\texttt{OBS_MODE} \neq \text{pointing and} \tag{130}$$
$$\texttt{OBS_MODE} \neq \text{POINTING} \tag{131}$$

and

$$\texttt{pix_adj} \neq \text{none,} \tag{132}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iii. `stop`:
If

$$\texttt{pix_adj} = \text{centroid or} \tag{133}$$
$$\texttt{pix_adj} = \text{edser or} \tag{134}$$
$$\texttt{pix_adj} = \text{randomize} \tag{135}$$

and

$$\texttt{stop} \neq \text{sky,} \tag{136}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iv. `PHAS`:
If

$$\texttt{pix_adj} = \text{centroid} \tag{137}$$

and the `infile` does not include the column `PHAS`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

v. `FLTGRADE`:
If

$$\texttt{pix_adj} = \text{edser} \tag{138}$$

and the `infile` does not include the column `FLTGRADE`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

13. `subpixfile`:

(a) If

$$\texttt{pix_adj} = \text{edser}, \tag{139}$$

then

i. Existence:
If the `subpixfile` does not exist, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

ii. Permission:
If the `subpixfile` exists and the file permissions do not allow it to be read, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iii. Validation:

A. `CONTENT`:
If the `subpixfile` does not have one or more HDUs h_{subpix} with the keyword

$$\texttt{CONTENT} = \text{AXAF_SUBPIX}, \tag{140}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

B. Keyword:
If the HDUs h_{subpix} of the `subpixfile` do not include the keyword `CCD_ID`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

C. Columns:
If the HDUs h_{subpix} of the `subpixfile` do not include binary tables with the columns `FLTGRADE`, `NPOINTS`, `ENERGY`, `CHIPX_OFFSET`, and `CHIPY_OFFSET`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message. Hereafter these columns are referred to as $\texttt{FLTGRADE}_{\text{subpix}}$, $\texttt{NPOINTS}_{\text{subpix}}$, $\texttt{ENERGY}_{\text{subpix}}$, $\texttt{CHIPX_OFFSET}_{\text{subpix}}$, and $\texttt{CHIPY_OFFSET}_{\text{subpix}}$, respectively.

1.5.2 Initializations

1. Focal-point CCD:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{141}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{142}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{143}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{144}$$

then the values of $\texttt{RA_PNT}_{\text{in}}$ and $\texttt{DEC_PNT}_{\text{in}}$ are used to determine the `CCD_ID` associated with the focal point. Hereafter this value is referred to as $\texttt{CCD_ID}_{\text{focus}}$.*

2. `acaofffile`:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{145}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{146}$$

*The focal point is the location associated with the optical axis in the absence of dither. This location should not be confused with the aim point, which is the location illuminated by an undithered point source provided that the source is not offset from the target location.

and

$$\texttt{acaofffile} \neq \text{none and} \tag{147}$$

$$\texttt{alignmentfile} \neq \text{none}, \tag{148}$$

then

(a) $\texttt{TIME}_{\text{min}}$ and $\texttt{TIME}_{\text{max}}$:
The `acaofffile` data are processed to determine the earliest and latest times for which there is aspect information:

$$\texttt{TIME}_{\text{min}} = \min\left(\texttt{TIME}_{\text{acaoff}}\right) \text{ and} \tag{149}$$

$$\texttt{TIME}_{\text{max}} = \max\left(\texttt{TIME}_{\text{acaoff}}\right). \tag{150}$$

(b) $\texttt{CHIPX_TARG}_{\text{acaoff,med}}$, $\texttt{CHIPY_TARG}_{\text{acaoff,med}}$:
The values of $\texttt{CHIPX_TARG}_{\text{acaoff}}$ and $\texttt{CHIPY_TARG}_{\text{acaoff}}$ are computed from the values of `RA_TARG` and `DEC_TARG` using the orientation of the telescope (i.e. `RA`, `DEC`, and `ROLL`) and the orientation of the SIM (i.e. `DY`, `DZ`, and `DTHETA`) and the `TIME`s in the `acaofffile`. The values of $\texttt{CHIPX_TARG}_{\text{acaoff}}$ and $\texttt{CHIPY_TARG}_{\text{acaoff}}$ are processed to obtain the median values:

$$\texttt{CHIPX_TARG}_{\text{acaoff,med}} = \text{median}(\texttt{CHIPX_TARG}_{\text{acaoff}}) \text{ and} \tag{151}$$

$$\texttt{CHIPY_TARG}_{\text{acaoff,med}} = \text{median}(\texttt{CHIPY_TARG}_{\text{acaoff}}). \tag{152}$$

1.5.3 Loop over events

The following steps are performed, in sequence, for each event.

1. `STATUS`:

   (a) Exists:
   If HDU h_{in} of the `infile` includes a 32-bit column named `STATUS`, then

   i. The values of the bits for an event are read from the `infile`.
   ii. The value of $\texttt{STATUS}[k]$ is set to zero for bits $k = 1$–5, 14, 16–19, and 23 (of 0–31), bits that can be set by `acis_process_events`.
   iii. If

   $$\texttt{doevtgrade} = \text{yes}, \tag{153}$$

   then the value of $\texttt{STATUS}[20]$, the other bit that can be set by `acis_process_events`, is set to zero.

   (b) Does not exist:
   If HDU h_{in} does not include a 32-bit column named `STATUS`, then

   i. A set of 32 bits are allocated for the event.
   ii. The values of the 32 bits are initialized to zero.

2. `EXPNO`:

   (a) Read:
   The value of `EXPNO` for an event is given by $\texttt{EXPNO}_{\text{in}}$.

   (b) Validation:
   If

   $$\texttt{EXPNO} < 0 \text{ or} \tag{154}$$

   $$\texttt{EXPNO} \geq 10^8, \tag{155}$$

   then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

3. CCD_ID:

   (a) Read:
   The value of CCD_ID for an event is given by $\mathtt{CCD_ID}_{\mathrm{in}}$.

   (b) Validation:
   If

$$\mathtt{CCD_ID} < 0 \text{ or} \tag{156}$$
$$\mathtt{CCD_ID} > 9, \tag{157}$$

   then acis_process_events exits with an error message because CCD_ID-dependent computations could fail if the value of CCD_ID is unphysical.

4. CHIPX:

   (a) Read:

      i. Level 0:
      If

$$\mathtt{CONTENT}_{\mathrm{in}} = \mathrm{EVT0}, \tag{158}$$

      then the value of CHIPX for an event is given by

$$\mathtt{CHIPX} = \mathtt{CCDX}_{\mathrm{in}} + 1. \tag{159}$$

      ii. Level 1, 1.5, or 2:
      If

$$\mathtt{CONTENT}_{\mathrm{in}} = \mathrm{EVT1} \text{ or} \tag{160}$$
$$\mathtt{CONTENT}_{\mathrm{in}} = \mathrm{TGEVT1} \text{ or} \tag{161}$$
$$\mathtt{CONTENT}_{\mathrm{in}} = \mathrm{EVT2}, \tag{162}$$

      then the value of CHIPX for an event is given by $\mathtt{CHIPX}_{\mathrm{in}}$.

   (b) Validation:

      i. Unphysical:
      If

$$\mathtt{CHIPX} < 1 \text{ or} \tag{163}$$
$$\mathtt{CHIPX} > 1024, \tag{164}$$

      then acis_process_events exits with an error message because CHIPX-dependent computations could fail if the value of CHIPX is unphysical.

      ii. Unexpected:
      If

$$\mathtt{CHIPX} = 1 \text{ or} \tag{165}$$
$$\mathtt{CHIPX} = 1024, \tag{166}$$

      then acis_process_events produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

5. CHIPX_ADJ:

(a) Initialize:

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX}. \tag{167}$$

6. NODE_ID:

(a) Calculate:
The NODE_ID of an event is given by

$$\texttt{NODE_ID} = \text{int}\left(\frac{\texttt{CHIPX} - 1}{256}\right), \tag{168}$$

where "int" means the integer portion of (i.e. truncate or round down) the quantity in parentheses.

7. CHIPY:

(a) Read:

i. Level 0:
If

$$\texttt{CONTENT}_{\text{in}} = \text{EVT0}, \tag{169}$$

then

A. Timed-exposure mode:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \tag{170}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \tag{171}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{GRADED or} \tag{172}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT}, \tag{173}$$

then the value of CHIPY for an event is given by

$$\texttt{CHIPY} = \texttt{CCDY}_{\text{in}} + 1. \tag{174}$$

B. Continuous-clocking mode:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{175}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{176}$$

then the value of CHIPY for an event is given by

$$\texttt{CHIPY} = \texttt{TROW}_{\text{in}} + 1. \tag{177}$$

ii. Level 1, 1.5, or 2:
If

$$\texttt{CONTENT}_{\text{in}} = \text{EVT1 or} \tag{178}$$
$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 or} \tag{179}$$
$$\texttt{CONTENT}_{\text{in}} = \text{EVT2}, \tag{180}$$

then the value of CHIPY for an event is given by $\texttt{CHIPY}_{\text{in}}$.

(b) Validation:

i. Unphysical:

A. Timed-exposure mode:
If

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{181}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{182}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED or} \tag{183}$$
$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT} \tag{184}$$

and

$$\texttt{CHIPY} < 1 \text{ or} \tag{185}$$
$$\texttt{CHIPY} > 1024, \tag{186}$$

then `acis_process_events` exits with an error message because `CHIPY`-dependent computations could fail if the value of `CHIPY` is unphysical.

B. Continuous-clocking mode:
If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{187}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{188}$$

and

$$\texttt{CHIPY} < 1 \text{ or} \tag{189}$$
$$\texttt{CHIPY} > 512, \tag{190}$$

then `acis_process_events` exits with an error message because the `CHIPY` value is out of range and `CHIPY`-dependent computations could fail if the value of `CHIPY` is unphysical (especially if it is less than 1).

ii. Unexpected:

A. FAINT, FAINT_BIAS, or GRADED:
If

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{191}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{192}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED} \tag{193}$$

and

$$\texttt{CHIPY} = 1 \text{ or} \tag{194}$$
$$\texttt{CHIPY} = 1024, \tag{195}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

B. VFAINT:
If

$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT} \tag{196}$$

and

$$\texttt{CHIPY} = 1 \text{ or} \tag{197}$$
$$\texttt{CHIPY} = 2 \text{ or} \tag{198}$$
$$\texttt{CHIPY} = 1023 \text{ or} \tag{199}$$
$$\texttt{CHIPY} = 1024, \tag{200}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or another of these conditions is true. Although these values are not unphysical, they should not occur.

C. CC33_FAINT or CC33_GRADED:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{201}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{202}$$

and

$$\texttt{CHIPY} = 1 \text{ or} \tag{203}$$
$$\texttt{CHIPY} = 512, \tag{204}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

8. $\texttt{CHIPX_TARG}_{\text{evt}}$, $\texttt{CHIPY_TARG}_{\text{evt}}$, and $\texttt{CHIPY_TARG}_{\text{eff}}$:
The coordinate $\texttt{CHIPY_TARG}_{\text{eff}}$ is used to compute the coordinates `X`, `Y`, and `SKY_1D`.

(a) Approximate:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{205}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{206}$$

and

$$\texttt{acaofffile} \neq \text{none and} \tag{207}$$
$$\texttt{acaofffile} \neq \text{NONE}, \tag{208}$$

then:

i. Initial values:
The values of $\texttt{CHIPX_TARG}_{\text{evt}}$ and $\texttt{CHIPY_TARG}_{\text{evt}}$ are computed from the values of `RA_TARG` and `DEC_TARG` using the value of $\texttt{CCD_ID}_{\text{focus}}$ and using the orientation of the telescope (i.e. `RA`, `DEC`, and `ROLL`) and the orientation of the SIM (i.e. `DY`, `DZ`, and `DTHETA`) at the time given by $\texttt{TIME_RO} - (\texttt{CHIPY_TARG}_{\text{acaoff,med}} + 1028) \times \texttt{TIMEDEL}$. The value of $\texttt{CHIPY_TARG}_{\text{evt}}$ can be negative.

ii. ACIS-I0 or -I2:
If

$$\texttt{CCD_ID}_{\text{focus}} = 0 \text{ or} \tag{209}$$
$$\texttt{CCD_ID}_{\text{focus}} = 2, \tag{210}$$

then

A. If

$$\texttt{CCD_ID} = 0 \text{ or} \tag{211}$$
$$\texttt{CCD_ID} = 2, \tag{212}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = \texttt{CHIPY_TARG}_{\text{evt}}. \tag{213}$$

B. If

$$\texttt{CCD_ID} = 1 \text{ or} \tag{214}$$
$$\texttt{CCD_ID} = 3, \tag{215}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPY_TARG}_{\text{evt}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}}). \tag{216}$$

C. If

$$\texttt{CCD_ID} \geq 4, \tag{217}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{218}$$

iii. ACIS-I1 or -I3:
If

$$\texttt{CCD_ID}_{\text{focus}} = 1 \text{ or} \tag{219}$$
$$\texttt{CCD_ID}_{\text{focus}} = 3, \tag{220}$$

then

A. If

$$\texttt{CCD_ID} = 0 \text{ or} \tag{221}$$
$$\texttt{CCD_ID} = 2, \tag{222}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPY_TARG}_{\text{evt}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}}). \tag{223}$$

B. If

$$\texttt{CCD_ID} = 1 \text{ or} \tag{224}$$
$$\texttt{CCD_ID} = 3, \tag{225}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = \texttt{CHIPY_TARG}_{\text{evt}}. \tag{226}$$

C. If

$$\texttt{CCD_ID} \geq 4, \tag{227}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 + (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{228}$$

iv. ACIS-S:
If

$$\texttt{CCD_ID}_{\text{focus}} \geq 4, \tag{229}$$

then

A. If

$$\texttt{CCD_ID} = 0 \text{ or} \tag{230}$$
$$\texttt{CCD_ID} = 2, \tag{231}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 + (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{232}$$

B. If

$$\texttt{CCD_ID} = 1 \text{ or} \tag{233}$$
$$\texttt{CCD_ID} = 3, \tag{234}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{235}$$

C. If

$$\texttt{CCD_ID} \geq 4, \tag{236}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = \texttt{CHIPY_TARG}_{\text{evt}}. \tag{237}$$

(b) Validation:
If

$$\texttt{CHIPY_TARG}_{\text{eff}} < -256 \text{ or} \tag{238}$$
$$\texttt{CHIPY_TARG}_{\text{eff}} \geq 1280, \tag{239}$$

then `acis_process_events` produces a warning message.

9. `TG_M`:

(a) Continuous-clocking mode with gratings:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{240}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{241}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{242}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{243}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1}, \tag{244}$$

then

i. Read:
The value of TG_M for an event is given by $\texttt{TG_M}_{\rm in}$.

ii. Validation:

A. If

$$\texttt{TG_M} < -99, \tag{245}$$

then

$$\texttt{TG_M} = -99 \tag{246}$$

and acis_process_events produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

B. If

$$\texttt{TG_M} > 99, \tag{247}$$

then

$$\texttt{TG_M} = 99 \tag{248}$$

and acis_process_events produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

10. CHIPY_TG:

(a) Continuous-clocking mode with gratings:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{249}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{250}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{251}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{252}$$

and

$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1}, \tag{253}$$

then

i. Read:
The value of CHIPY_TG for an event is given by $\texttt{CHIPY_TG}_{\rm in}$.

ii. Validation:

A. If

$$\texttt{TG_M} > -99 \text{ and} \tag{254}$$
$$\texttt{TG_M} < 99 \text{ and} \tag{255}$$
$$\texttt{CHIPY_TG} \neq \text{NULL} \tag{256}$$

and

$$\texttt{CHIPY_TG} \leq 0 \text{ or} \tag{257}$$
$$\texttt{CHIPY_TG} \geq 1025, \tag{258}$$

then acis_process_events exits with an error message because CHIPY_TG-dependent computations could fail if the value of CHIPY_TG is unphysical.

B. If

$$\texttt{TG_M} > -99 \text{ and} \tag{259}$$
$$\texttt{TG_M} < 99 \text{ and} \tag{260}$$
$$\texttt{CHIPY_TG} \neq \text{NULL and} \tag{261}$$
$$\texttt{CHIPY_TG} < 1, \tag{262}$$

then

$$\texttt{CHIPY_TG} = 1. \tag{263}$$

C. If

$$\texttt{TG_M} > -99 \text{ and} \tag{264}$$
$$\texttt{TG_M} < 99 \text{ and} \tag{265}$$
$$\texttt{CHIPY_TG} \neq \text{NULL and} \tag{266}$$
$$\texttt{CHIPY_TG} > 1024, \tag{267}$$

then

$$\texttt{CHIPY_TG} = 1024. \tag{268}$$

11. `CHIPY_ZO`:

(a) Continuous-clocking mode with gratings:
If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{269}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{270}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{271}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{272}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1}, \tag{273}$$

then

i. Read:
The value of `CHIPY_ZO` for an event is given by $\texttt{CHIPY_ZO}_{\text{in}}$.

12. `TIME_RO`:

(a) Continuous-clocking mode:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{274}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{275}$$

then

i. Read:

A. Level 0:
If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0}, \tag{276}$$

then the value of TIME_RO for an event is given by $\texttt{TIME}_{\rm in}$.

B. Level 1, 1.5, or 2:
If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{277}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{278}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{279}$$

and

$$\texttt{TIME_RO}_{\rm in} > 0, \tag{280}$$

then

$$\texttt{TIME_RO} = \texttt{TIME_RO}_{\rm in}. \tag{281}$$

If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{282}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{283}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{284}$$

and

$$\texttt{TIME_RO}_{\rm in} = 0, \tag{285}$$

then

$$\texttt{TIME_RO} = \texttt{TIME}_{\rm in}. \tag{286}$$

ii. Validation:
If

$$\texttt{TIME_RO} < 0 \text{ or} \tag{287}$$
$$\texttt{TIME_RO} \geq 3 \times 10^9, \tag{288}$$

then acis_process_events produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

13. TIME and CHIPY_ADJ:
For continuous-clocking mode observations, the value of CHIPY_ADJ is used to compute the TIME, pulse heights, and the coordinates TDETX, TDETY, DETX, and DETY.

(a) Calculate:

i. Timed exposure mode:
If

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{289}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{290}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED or} \tag{291}$$
$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT}, \tag{292}$$

then

$$\texttt{TIME} = \texttt{TIME}_{\rm in} \text{and} \tag{293}$$
$$\texttt{CHIPY_ADJ} = \texttt{CHIPY}. \tag{294}$$

ii. Continuous-clocking mode:
If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{295}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{296}$$

then

A. Set

$$\texttt{CHIPY_ADJ} = 512 \text{ and} \tag{297}$$
$$\texttt{TIME}' = \texttt{TIME_RO} - (\texttt{CHIPY_ADJ} + 1028) \times \texttt{TIMEDEL}. \tag{298}$$

B. If

$$\texttt{acaofffile} \neq \text{none and} \tag{299}$$
$$\texttt{acaofffile} \neq \text{NONE}, \tag{300}$$

then

$$\texttt{CHIPY_ADJ}' = \texttt{CHIPY_TARG}_{\rm eff} \text{ and} \tag{301}$$
$$\texttt{TIME}' = \texttt{TIME_RO} - (\texttt{CHIPY_ADJ}' + 1028) \times \texttt{TIMEDEL}, \tag{302}$$

and CHIPY_ADJ is computed from the values of RA_TARG and DEC_TARG using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME′. At this step, the value of CHIPY_ADJ can be negative.

C. If

$$\texttt{CONTENT} = \text{TGEVT1 and} \tag{303}$$
$$\texttt{TG_M} > -99 \text{ and} \tag{304}$$
$$\texttt{TG_M} < 99 \text{ and} \tag{305}$$
$$\texttt{CHIPY_TG} \neq \text{NULL}, \tag{306}$$

then

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_TG}. \tag{307}$$

D. If

$$\texttt{CONTENT} = \text{TGEVT} \tag{308}$$

and

$$\texttt{TG_M} = -99 \text{ or} \tag{309}$$
$$\texttt{TG_M} = 99, \tag{310}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{311}$$

E. If

$$\texttt{acaofffile} \neq \text{none and} \tag{312}$$
$$\texttt{acaofffile} \neq \text{NONE} \tag{313}$$

and

$$\texttt{TIME}' < \texttt{TIME}_{\text{min}} \text{ or} \tag{314}$$
$$\texttt{TIME}' \geq \texttt{TIME}_{\text{max}}, \tag{315}$$

then

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_TARG}_{\text{acaoff,med}}. \tag{316}$$

F. If

$$\texttt{acaofffile} = \text{none or} \tag{317}$$
$$\texttt{acaofffile} = \text{NONE} \tag{318}$$

and

$$\texttt{CONTENT} \neq \text{TGEVT1}, \tag{319}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{320}$$

G. If

$$\texttt{CCD_ID}_{\text{focus}} \leq 3 \text{ and} \tag{321}$$
$$\texttt{CCD_ID} \geq 4, \tag{322}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{323}$$

H. If

$$\texttt{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \tag{324}$$
$$\texttt{CCD_ID} \leq 3, \tag{325}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{326}$$

I. If

$$\texttt{obs_mode} = \text{secondary or} \tag{327}$$
$$\texttt{obs_mode} = \text{SECONDARY}, \tag{328}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{329}$$

J. If

$$\texttt{CHIPY_ADJ} < 0.5 \text{ or} \tag{330}$$
$$\texttt{CHIPY_ADJ} \geq 1024.5 \tag{331}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{332}$$

K. Set

$$\texttt{TIME} = \texttt{TIME_RO} - (\texttt{CHIPY_ADJ} + 1028) \times \texttt{TIMEDEL}. \tag{333}$$

In continuous-clocking mode, the coordinate `CHIPY_ADJ` is used to compute the time, the pulse heights, and the coordinates (except for `X`, `Y`, and `SKY_1D`).

(b) Validation:

i. If

$$\texttt{TIME} < 0 \text{ or} \tag{334}$$
$$\texttt{TIME} \geq 3 \times 10^9, \tag{335}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

ii. If

$$\texttt{CHIPY_ADJ} < 0.5 \text{ or} \tag{336}$$
$$\texttt{CHIPY_ADJ} \geq 1024.5, \tag{337}$$

then `acis_process_events` exits with an error message because `CHIPY_ADJ`-dependent computations could fail if the value of `CHIPY_ADJ` is unphysical.

14. Bad pixel:

(a) If

$$\texttt{badpixfile} \neq \text{none and} \tag{338}$$
$$\texttt{badpixfile} \neq \text{NONE} \tag{339}$$

and the `badpixfile` includes a valid HDU h_{badpix} where $\texttt{CCD_ID}_{\text{badpix}} = \texttt{CCD_ID}$, then the HDU h_{badpix} is searched as follows to determine if the event should have one or more `STATUS` bits set to one.

i. If $\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows r in HDU h_{badpix} where

$$\texttt{CHIPX} \geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} \tag{340}$$
$$\texttt{CHIPX} \leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} \tag{341}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{badpix},r} \text{ and} \tag{342}$$
$$\texttt{TIME} < \texttt{TIME_STOP}_{\text{badpix},r} \tag{343}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[5] = 1 \text{ or} \tag{344}$$
$$\texttt{STATUS}_{\text{badpix},r}[6] = 1 \text{ or} \tag{345}$$
$$\texttt{STATUS}_{\text{badpix},r}[9] = 1, \tag{346}$$

then

$$\texttt{STATUS}[0] = 1 \tag{347}$$

for the event. Here $\texttt{CCD_ID}_{\text{badpix}}$ is the value of the keyword `CCD_ID` in HDU h_{badpix} of the `badpixfile`, $\texttt{CHIPX}_{\text{badpix},r}[0]$ and $\texttt{CHIPX}_{\text{badpix},r}[1]$ are the first and second values in the vector column named `CHIPX` of row r of HDU h_{badpix} of the `badpixfile`, and $\texttt{TIME}_{\text{badpix},r}$ and $\texttt{TIME_STOP}_{\text{badpix},r}$ are the values in the columns named `TIME` and `TIME_STOP`, respectively, of row r of HDU h_{badpix} of the `badpixfile`.

ii. If $\texttt{DATAMODE}_{\text{in}}$ = CC33_FAINT or $\texttt{DATAMODE}_{\text{in}}$ = CC33_GRADED and there are one or more rows r in HDU h_{badpix} where

$$\texttt{CHIPX} \geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} \tag{348}$$
$$\texttt{CHIPX} \leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} \tag{349}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{badpix},r} \text{ and} \tag{350}$$
$$\texttt{TIME} < \texttt{TIME_STOP}_{\text{badpix},r} \tag{351}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[0] = 1 \text{ or} \tag{352}$$
$$\texttt{STATUS}_{\text{badpix},r}[1] = 1 \text{ or} \tag{353}$$
$$\texttt{STATUS}_{\text{badpix},r}[7] = 1 \text{ or} \tag{354}$$
$$\texttt{STATUS}_{\text{badpix},r}[11] = 1 \text{ or} \tag{355}$$
$$\texttt{STATUS}_{\text{badpix},r}[12] = 1 \text{ or} \tag{356}$$
$$\texttt{STATUS}_{\text{badpix},r}[13] = 1 \text{ or} \tag{357}$$
$$\texttt{STATUS}_{\text{badpix},r}[14] = 1 \text{ or} \tag{358}$$
$$\texttt{STATUS}_{\text{badpix},r}[16] = 1, \tag{359}$$

then

$$\texttt{STATUS}[4] = 1 \tag{360}$$

for the event.

iii. If $\texttt{DATAMODE}_{\text{in}}$ = CC33_FAINT or $\texttt{DATAMODE}_{\text{in}}$ = CC33_GRADED and there are one or more rows r in HDU h_{badpix} where

$$\texttt{CHIPX} \geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} \tag{361}$$
$$\texttt{CHIPX} \leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} \tag{362}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{badpix},r} \text{ and} \tag{363}$$
$$\texttt{TIME} < \texttt{TIME_STOP}_{\text{badpix},r} \tag{364}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[8] = 1 \text{ or} \tag{365}$$
$$\texttt{STATUS}_{\text{badpix},r}[10] = 1, \tag{366}$$

then

$$\texttt{STATUS}[5] = 1 \tag{367}$$

for the event.

iv. If $\texttt{DATAMODE}_{\rm in}$ = CC33_FAINT or $\texttt{DATAMODE}_{\rm in}$ = CC33_GRADED and there are one or more rows r in HDU $h_{\rm badpix}$ where

$$\begin{aligned} \texttt{CHIPX} &\geq \texttt{CHIPX}_{\rm badpix,r}[0] \text{ and} && (368)\\ \texttt{CHIPX} &\leq \texttt{CHIPX}_{\rm badpix,r}[1] \text{ and} && (369)\\ \texttt{TIME} &\geq \texttt{TIME}_{\rm badpix,r} \text{ and} && (370)\\ \texttt{TIME} &< \texttt{TIME_STOP}_{\rm badpix,r} && (371) \end{aligned}$$

and

$$\texttt{STATUS}_{\rm badpix,r}[3] = 1, \quad (372)$$

then

$$\texttt{STATUS}[6] = 1 \quad (373)$$

for the event.

v. If $\texttt{DATAMODE}_{\rm in}$ = CC33_FAINT or $\texttt{DATAMODE}_{\rm in}$ = CC33_GRADED and there are one or more rows r in HDU $h_{\rm badpix}$ where

$$\begin{aligned} \texttt{CHIPX} &\geq \texttt{CHIPX}_{\rm badpix,r}[0] \text{ and} && (374)\\ \texttt{CHIPX} &\leq \texttt{CHIPX}_{\rm badpix,r}[1] \text{ and} && (375)\\ \texttt{TIME} &\geq \texttt{TIME}_{\rm badpix,r} \text{ and} && (376)\\ \texttt{TIME} &< \texttt{TIME_STOP}_{\rm badpix,r} && (377) \end{aligned}$$

and

$$\begin{aligned} \texttt{STATUS}_{\rm badpix,r}[2] &= 1 \text{ or} && (378)\\ \texttt{STATUS}_{\rm badpix,r}[4] &= 1, && (379) \end{aligned}$$

then

$$\texttt{STATUS}[8] = 1 \quad (380)$$

for the event.

vi. If $\texttt{DATAMODE}_{\rm in}$ = CC33_FAINT or $\texttt{DATAMODE}_{\rm in}$ = CC33_GRADED and there are one or more rows r in HDU $h_{\rm badpix}$ where

$$\begin{aligned} \texttt{CHIPX} &\geq \texttt{CHIPX}_{\rm badpix,r}[0] \text{ and} && (381)\\ \texttt{CHIPX} &\leq \texttt{CHIPX}_{\rm badpix,r}[1] \text{ and} && (382)\\ \texttt{TIME} &\geq \texttt{TIME}_{\rm badpix,r} \text{ and} && (383)\\ \texttt{TIME} &< \texttt{TIME_STOP}_{\rm badpix,r} && (384) \end{aligned}$$

and

$$\texttt{STATUS}_{\rm badpix,r}[15] = 1, \quad (385)$$

then

$$\texttt{STATUS}[16] = 1 \quad (386)$$

for the event.

vii. In summary, the mapping between a bad-pixel `STATUS` bit and the corresponding event `STATUS` bit is listed in Table 1.

15. `PHAS`:

Table 1: Bad-pixel to event STATUS bit mapping

Bad-pixel STATUS bit	Event STATUS bit
0	4
1	4
2	8
3	6
4	8
5	0
6	0
7	4
8	5
9	0
10	5
11	4
12	4
13	4
14	4
15	16
16	4

(a) If HDU 1 of the `infile` includes the column `PHAS`, then

i. the values of `PHAS` for an event are read from the `infile`.

ii. If `PHAS`$[4] <$ the split threshold, then `STATUS`$[k] = 1$ for bit $k = 1$.

iii. If `PHAS`$[4] \leq$ `PHAS`$[j]$ for one or more $j = 0$–3 or 5–8, then `STATUS`$[k] = 1$ for bit $k = 1$.

iv. If `PHAS`$[j] > 4095$ for one or more $j = 0$–8, then `STATUS`$[k] = 1$ for bit $k = 2$.

16. `PHAS_ADJ`:

(a) If HDU 1 of the `infile` includes `DATAMODE`$_{\rm in}$ = CC33_FAINT and the parameter `apply_cti` = yes and the `ctifile` and `mtlfile` are specified, then the CTI-adjusted pulse heights are computed as follows.

i. The real-valued arrays for the serial CTI adjustment Δ_x, the parallel CTI adjustment Δ_y, and the adjusted pulse heights `PHAS_ADJ` are initialized such that

$$\Delta_x[j] = 0, \tag{387}$$

$$\Delta_y[j] = 0, \text{ and} \tag{388}$$

$$\texttt{PHAS_ADJ}[j] = \texttt{PHAS}[j] \tag{389}$$

for every element $j = 0$–8, where the starting point for the adjusted pulse heights are the unadjusted pulse heights `PHAS`. Note that the values of the unadjusted pulse heights `PHAS` remain unchanged to ensure that it is possible to remove the CTI adjustment or to reapply the adjustment if the algorithm or calibration data are modified.

ii. The CTI iteration counter n is initialized such that

$$n = 1. \tag{390}$$

iii. The temporary variables Δ'_x, Δ'_y, and `PHAS_ADJ`$'$ are set such that

$$\Delta'_x[j] = \Delta_x[j], \tag{391}$$

$$\Delta'_y[j] = \Delta_y[j], \text{ and} \tag{392}$$

$$\texttt{PHAS_ADJ}'[j] = \texttt{PHAS_ADJ}[j] \tag{393}$$

for each element j.

iv. A. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID` = 0 or 2, then the values of Δ_x are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0], \tag{394}$$
$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[0]s_x\rho_x[0]V_x[0], \tag{395}$$
$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2] - c'_x[1]s_x\rho_x[1]V_x[1], \tag{396}$$
$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3], \tag{397}$$
$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[3]s_x\rho_x[3]V_x[3], \tag{398}$$
$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5] - c'_x[4]s_x\rho_x[4]V_x[4], \tag{399}$$
$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6], \tag{400}$$
$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[6]s_x\rho_x[6]V_x[6], \text{ and} \tag{401}$$
$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8] - c'_x[7]s_x\rho_x[7]V_x[7], \tag{402}$$

where

$$c_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold} \\ \quad \text{(for all } j\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \quad \text{(for } j = 1,2,4,5,7,8\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,3,6\text{)} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \quad \text{(for } j = 1,2,4,5,7,8\text{)}, \end{cases} \end{cases}$$

$$c'_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold or} \\ \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] < \text{ split threshold or} \\ j \rightarrow \texttt{CHIPX} = 1, 256, 513, \text{ or } 768 \\ \quad \text{(for } j = 0,1,3,4,6,7\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,3,4,6,7\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,3,4,6,7\text{)}, \end{cases} \end{cases}$$

$$s_x = 1 + \texttt{TCTIX}\,(T - \texttt{FP_TEMPO})\,, \tag{403}$$

$$\begin{cases} s_x \text{ is a temperature dependent scaling factor,} \\ \texttt{TCTIX} \text{ is the } \texttt{CCD_ID} \text{ dependent value in the column } \texttt{TCTIX} \text{ of the} \\ \quad \texttt{ctifile}, \\ \texttt{FP_TEMPO} \text{ is the name of a keyword in the } \texttt{ctifile}, \end{cases}$$

$$T = \left(\frac{t' - t'_k}{t'_{k+1} - t'_k}\right)(\texttt{FP_TEMP}_{k+1} - \texttt{FP_TEMP}_k) + \texttt{FP_TEMP}_k, \tag{404}$$

$$\{\ T \text{ is the time dependent focal plane temperature,}$$

$$t' = t + \texttt{TIMEDEL}_{\text{in}}\,(\texttt{TIMEPIXR}_{\text{evt}} - 0.5)\,, \tag{405}$$

$$\left\{\begin{array}{l} t \text{ is the } \texttt{TIME} \text{ of the event,} \\ \texttt{TIMEPIXR}_{\rm evt} \text{ is a keyword in the } \texttt{infile}, \end{array}\right.$$

$$t'_k = \texttt{TIME}_k + \texttt{TIMEDEL}_{\rm mtl}\left(\texttt{TIMEPIXR}_{\rm mtl} - 0.5\right), \tag{406}$$

$$\left\{\begin{array}{l} \texttt{TIME}_k \text{ is the } k^{\rm th} \text{ element of the column } \texttt{TIME} \text{ in the } \texttt{mtlfile}, \\ t'_k \leq t', \\ \text{If } t' < t'_k \text{ for } k = 0, \text{ then } k = 0, \\ \texttt{FP_TEMP}_k \text{ is the } k^{\rm th} \text{ element of the column } \texttt{FP_TEMP} \text{ in the } \texttt{mtlfile}, \\ \texttt{TIMEDEL}_{\rm mtl} \text{ is a keyword in the } \texttt{mtlfile}, \\ \texttt{TIMEPIXR}_{\rm mtl} \text{ is a keyword in the } \texttt{mtlfile}, \end{array}\right.$$

$$t'_{k+1} = \texttt{TIME}_{k+1} + \texttt{TIMEDEL}_{\rm mtl}\left(\texttt{TIMEPIXR}_{\rm mtl} - 0.5\right), \tag{407}$$

$$\left\{\begin{array}{l} \texttt{TIME}_{k+1} \text{ is the } (k+1)^{\rm th} \text{ element of the column } \texttt{TIME} \text{ in the } \texttt{mtlfile}, \\ t'_{k+1} > t', \\ \text{If } t' > t'_k \text{ for } k = n, \text{ where } n \text{ is the last element, then } k = n, \\ \texttt{FP_TEMP}_{k+1} \text{ is the } (k+1)^{\rm th} \text{ element of the column } \texttt{FP_TEMP} \text{ in the} \\ \quad \texttt{mtlfile}, \end{array}\right.$$

$$\rho_x[j] = \text{serial trap density}, \tag{408}$$

$$\left\{\begin{array}{l} \rho_x[j] \text{ depends upon the } \texttt{CCD_ID} \text{ and upon the } \texttt{CHIPX} \text{ and nint}(\texttt{CHIPY_ADJ}) \\ \quad \text{coordinates associated with element } j \text{ of } \texttt{PHAS_ADJ}[j] \text{ (see Fig. 1)}, \end{array}\right.$$

$$V_x[j] = \left(\frac{\texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \texttt{PHA}_l}{\texttt{PHA}_{l+1} - \texttt{PHA}_l}\right)\left(\texttt{VOLUME_X}_{l+1} - \texttt{VOLUME_X}_l\right) + \texttt{VOLUME_X}_l, \tag{409}$$

$$\left\{\begin{array}{l} \texttt{PHA}_l \text{ is the } l^{\rm th} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_l \text{ (and } \texttt{PHA}_{l+1}\text{) are } \texttt{CCD_ID} \text{ depdendent}, \\ \texttt{PHA}_l \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_l > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \texttt{PHA}_{l+1} \text{ is the } (l+1)^{\rm th} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_{l+1} > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_{l+1} \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \quad \text{element, then } l = n, \\ \texttt{VOLUME_X}_l \text{ is the } l^{\rm th} \text{ element of the column } \texttt{VOLUME_X} \text{ in the } \texttt{ctifile}, \\ \texttt{VOLUME_X}_l, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_l, \\ \texttt{VOLUME_X}_{l+1} \text{ is the } (l+1)^{\rm th} \text{ element of the column } \texttt{VOLUME_X} \text{ in the} \\ \quad \texttt{ctifile}, \text{ and} \\ \texttt{VOLUME_X}_{l+1}, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_{l+1} \end{array}\right.$$

B. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID` = 1 or 3, then the values of Δ_x are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0] - c'_x[1]s_x\rho_x[1]V_x[1], \tag{410}$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[2]s_x\rho_x[2]V_x[2], \tag{411}$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2], \tag{412}$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3] - c'_x[4]s_x\rho_x[4]V_x[4], \tag{413}$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[5]s_x\rho_x[5]V_x[5], \tag{414}$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5], \tag{415}$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6] - c'_x[7]s_x\rho_x[7]V_x[7], \tag{416}$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[8]s_x\rho_x[8]V_x[8], \text{ and} \tag{417}$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8], \tag{418}$$

where

$$
c_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold} \\ \quad \text{(for all } j\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \quad \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 2, 5, 8\text{)} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \quad \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{cases} \end{cases}
$$

$$
c'_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold or} \\ \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] < \text{ split threshold or} \\ j \rightarrow \texttt{CHIPX} = 257, 512, 769, \text{ or } 1024 \\ \quad \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \geq \text{ split threshold} \\ \quad \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{cases} \end{cases}
$$

and s_x, T, t', t'_k, t'_{k+1}, $\rho_x[j]$, and $V_x[j]$ are given by equations. 403, 404, 405, 406, 407, 408, and 409, respectively.

v. If there is a parallel CTI trap-density map in the `ctifile` for `CCD_ID`, then the values of Δ_y are given by

$$
\begin{aligned}
\Delta_y[0] &= c_y[0] s_y \rho_y[0] V_y[0], && (419)\\
\Delta_y[1] &= c_y[1] s_y \rho_y[1] V_y[1], && (420)\\
\Delta_y[2] &= c_y[2] s_y \rho_y[2] V_y[2], && (421)\\
\Delta_y[3] &= c_y[3] s_y \rho_y[3] V_y[3] - c'_y[0] s_y \rho_y[0] V_y[0], && (422)\\
\Delta_y[4] &= c_y[4] s_y \rho_y[4] V_y[4] - c'_y[1] s_y \rho_y[1] V_y[1], && (423)\\
\Delta_y[5] &= c_y[5] s_y \rho_y[5] V_y[5] - c'_y[2] s_y \rho_y[2] V_y[2], && (424)\\
\Delta_y[6] &= c_y[6] s_y \rho_y[6] V_y[6] - c'_y[3] s_y \rho_y[3] V_y[3], && (425)\\
\Delta_y[7] &= c_y[7] s_y \rho_y[7] V_y[7] - c'_y[4] s_y \rho_y[4] V_y[4], \text{ and} && (426)\\
\Delta_y[8] &= c_y[8] s_y \rho_y[8] V_y[8] - c'_y[5] s_y \rho_y[5] V_y[5], && (427)
\end{aligned}
$$

where

$$c_y[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold} \\ \quad \text{(for all } j\text{)}, \end{cases} \\ \texttt{FRCTRLY} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \quad \texttt{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \quad \text{(for } j = 3,4,5,6,7,8\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,2\text{)} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \quad \texttt{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \quad \text{(for } j = 3,4,5,6,7,8\text{)}, \end{cases} \end{cases}$$

$$c'_y[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold or} \\ \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] < \text{ split threshold or} \\ j \rightarrow \texttt{CHIPY} = 1\text{or } 1024 \\ \quad \text{(for } j = 1,2,3,4,5\text{)}, \end{cases} \\ \texttt{FRCTRLY} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \quad \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,2,3,4,5\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \quad \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,2,3,4,5\text{)}, \end{cases} \end{cases}$$

$$s_y = 1 + \texttt{TCTIY}\,(T - \texttt{FP_TEMPO})\,, \tag{428}$$

$$\begin{cases} s_y \text{ is a temperature dependent scaling factor,} \\ \texttt{TCTIY} \text{ is the } \texttt{CCD_ID} \text{ dependent value in the column } \texttt{TCTIY} \text{ of the} \\ \quad \texttt{ctifile}, \\ \texttt{FP_TEMPO} \text{ is the name of a keyword in the } \texttt{ctifile}, \end{cases}$$

$$\rho_y[j] = \text{parallel trap density,} \tag{429}$$

$$\begin{cases} \rho_y[j] \text{ depends upon the } \texttt{CCD_ID} \text{ and upon the } \texttt{CHIPX} \text{ and nint}(\texttt{CHIPY_ADJ}) \\ \quad \text{coordinates associated with element } j \text{ of } \texttt{PHAS_ADJ}[j] \text{ (see Fig. 1),} \end{cases}$$

$$V_y[j] = \left(\frac{\texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \texttt{PHA}_l}{\texttt{PHA}_{l+1} - \texttt{PHA}_l}\right)(\texttt{VOLUME_Y}_{l+1} - \texttt{VOLUME_Y}_l) + \texttt{VOLUME_Y}_l, \tag{430}$$

$$\begin{cases} \texttt{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_l \text{ (and } \texttt{PHA}_{l+1}\text{) are } \texttt{CCD_ID} \text{ depdendent,} \\ \texttt{PHA}_l \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_l > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \texttt{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_{l+1} > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_{l+1} \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \quad \text{element, then } l = n, \\ \texttt{VOLUME_Y}_l \text{ is the } l^{\text{th}} \text{ element of the column } \texttt{VOLUME_Y} \text{ in the } \texttt{ctifile}, \\ \texttt{VOLUME_Y}_l, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_l, \\ \texttt{VOLUME_Y}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column } \texttt{VOLUME_Y} \text{ in the} \\ \quad \texttt{ctifile}, \\ \texttt{VOLUME_Y}_{l+1}, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_{l+1}, \end{cases}$$

and T, t', t'_k, and t'_{k+1}, are given by equations. 404, 405, 406, and 407, respectively.

vi. The CTI-adjusted pulse heights

$$\texttt{PHAS_ADJ}[j] = \texttt{PHAS}[j] + \Delta_x[j] + \Delta_y[j] \tag{431}$$

for all j.

vii. A. If

$$|\texttt{PHAS_ADJ}'[j] - \texttt{PHAS_ADJ}[j]| < \texttt{cticonverge} \text{ (for all } j\text{) and} \tag{432}$$
$$n \leq \texttt{max_cti_iter}, \tag{433}$$

then the computation of PHAS_ADJ is complete for the event.

B. If

$$|\texttt{PHAS_ADJ}'[j] - \texttt{PHAS_ADJ}[j]| \geq \texttt{cticonverge} \text{ (for one or more } j\text{) and} \tag{434}$$
$$n < \texttt{max_cti_iter}, \tag{435}$$

then $n = n + 1$ and steps 1.5.16(a)iii–1.5.16(a)vii are repeated.

C. If

$$|\texttt{PHAS_ADJ}'[j] - \texttt{PHAS_ADJ}[j]| \geq \texttt{cticonverge} \text{ (for one or more } j\text{) and} \tag{436}$$
$$n \geq \texttt{max_cti_iter}, \tag{437}$$

then no additional iterations are performed, the values of PHAS_ADJ[j] from the most recent iteration are used as are, and STATUS[k] = 1 for bit $k = 20$ to indicate that the CTI adjustment did not converge.

17. FLTGRADE:

(a) If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT and} \tag{438}$$
$$\texttt{apply_cti} = \text{yes}, \tag{439}$$

then

$$\texttt{FLTGRADE} = c_{\text{f}}[0] + 2c_{\text{f}}[1] + 4c_{\text{f}}[2] + 8c_{\text{f}}[3] + 16c_{\text{f}}[5] + 32c_{\text{f}}[6] + 64c_{\text{f}}[7] + 128c_{\text{f}}[8], \tag{440}$$

where

$$c_{\text{f}}[j] = \begin{cases} 0 & \text{if } \texttt{PHAS_ADJ}[j] < \text{split threshold} \\ 1 & \text{otherwise,} \end{cases} \tag{441}$$

and the elements $j = 0$–3 and 5–8 of PHAS_ADJ are depicted in Figure 1.

(b) If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT and} \tag{442}$$
$$\texttt{apply_cti} = \text{no}, \tag{443}$$

then

$$\texttt{FLTGRADE} = c_{\text{f}}[0] + 2c_{\text{f}}[1] + 4c_{\text{f}}[2] + 8c_{\text{f}}[3] + 16c_{\text{f}}[5] + 32c_{\text{f}}[6] + 64c_{\text{f}}[7] + 128c_{\text{f}}[8], \tag{444}$$

where

$$c_{\text{f}}[j] = \begin{cases} 0 & \text{if } \texttt{PHAS}[j] < \text{split threshold} \\ 0 & \text{if } \texttt{PHAS}[j] > 4095 \\ 0 & \text{if } \texttt{PHAS}[j] > \texttt{PHAS}[4] \text{ for } j = 0-3) \\ 0 & \text{if } \texttt{PHAS}[j] \geq \texttt{PHAS}[4] \text{ for } j = 5-8) \\ 1 & \text{otherwise.} \end{cases} \tag{445}$$

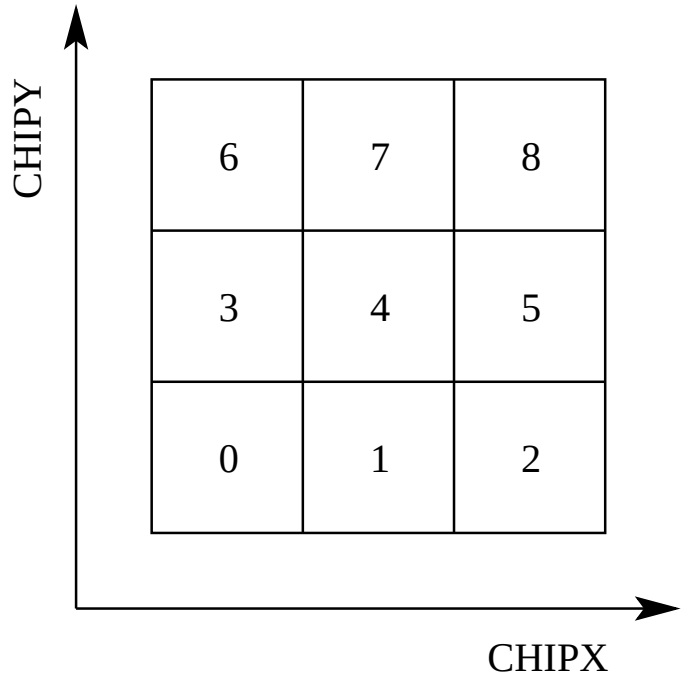

Figure 1: The relative CHIPX and CHIPY coordinates of the nine elements $j = 0$–8 of a 3 pixel × 3 pixel event island PHAS[j] or PHAS_ADJ[j].

(c) If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED}, \tag{446}$$

then the FLTGRADE of an event is equal to the value of FLTGRADE for the event in the infile.

18. GRADE:

(a) If the gradefile is specified, then the GRADE of an event is determined from the FLTGRADE of the event as follows.

i. The appropriate HDU of the gradefile is identified. This HDU is the one where the header keyword CBD10001 includes the $\texttt{DATAMODE}_{\rm in}$ of HDU 1 of the infile.

ii. The row i of the appropriate HDU of the gradefile is identified. This row is the one where

$$\texttt{FLTGRADE}_{{\rm grade},i} = \texttt{FLTGRADE}, \tag{447}$$

where $\texttt{FLTGRADE}_{\rm grade}$ is a column in the gradefile.

iii. The GRADE of the event is given by

$$\texttt{GRADE} = \texttt{GRADE}_{{\rm grade},i}, \tag{448}$$

where $\texttt{GRADE}_{\rm grade}$ is a column in the gradefile.

19. PHA_RO:

(a) If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT}, \tag{449}$$

then

$$\texttt{PHA_RO} = \sum_{j=0}^{8} \beta[j]p[j], \tag{450}$$

where

i.

$$p[j] = \texttt{PHAS}[j]. \tag{451}$$

ii. The elements $j = 0$–8 of PHAS are depicted in Figure 1.

iii.

$$\beta[j] = 0 \quad \text{if} \quad p[j] < \text{split threshold}. \tag{452}$$

iv.

$$\beta[j] = 0 \text{ if } \begin{cases} p[j] > p[4] \text{ (for } j = 0{-}3) \\ p[j] \geq p[4] \text{ (for } j = 5{-}8) \end{cases} \tag{453}$$

v. If CORNERS $= -1$, then

$$\beta[0] = \beta[2] = \beta[6] = \beta[8] = 0. \tag{454}$$

vi. If CORNERS $= 0$, then there are no additional constraints on $\beta[0]$, $\beta[2]$, $\beta[6]$, and $\beta[8]$.

vii. If CORNERS $= 1$, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ and } \beta[3] = 0. \tag{455}$$
$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ and } \beta[5] = 0. \tag{456}$$
$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \text{ and } \beta[7] = 0. \tag{457}$$
$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \text{ and } \beta[7] = 0. \tag{458}$$

viii. If CORNERS $= 2$, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ or } \beta[3] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{459}$$
$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ or } \beta[5] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{460}$$
$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \text{ or } \beta[7] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{461}$$
$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \text{ or } \beta[7] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{462}$$

(b) If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{463}$$

then

i. If

$$\texttt{CONTENT}_{\text{in}} = \text{EVT0}, \tag{464}$$

then the value of PHA_RO for the event is the value of PHA in the infile.

ii. If

$$\texttt{CONTENT}_{\text{in}} = \text{EVT1 or} \tag{465}$$
$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 or} \tag{466}$$
$$\texttt{CONTENT}_{\text{in}} = \text{EVT2}, \tag{467}$$

then the value of PHA_RO for the event is the value of PHA_RO in the infile.

20. PHA, including time-dependent gain:

(a) If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT}, \tag{468}$$

then

$$\texttt{PHA} = \sum_{j=0}^{8} \beta[j] p[j], \tag{469}$$

where

i.

$$p[j] = \begin{cases} \texttt{PHAS_ADJ}[j] & \text{if } \texttt{apply_cti} = \text{yes} \\ \texttt{PHAS}[j] & \text{if } \texttt{apply_cti} = \text{no} \end{cases} \tag{470}$$

ii. The elements $j = 0$–8 of PHAS_ADJ (or PHAS) are depicted in Figure 1.

iii.

$$\beta[j] = 0 \quad \text{if} \quad p[j] < \text{split threshold}. \tag{471}$$

iv. If the CTI adjustment is not performed, then

$$\beta[j] = 0 \text{ if } \begin{cases} p[j] > p[4] \text{ (for } j = 0{-}3) \\ p[j] \geq p[4] \text{ (for } j = 5{-}8) \end{cases} \tag{472}$$

v. If CORNERS $= -1$, then

$$\beta[0] = \beta[2] = \beta[6] = \beta[8] = 0. \tag{473}$$

vi. If CORNERS $= 0$, then there are no additional constraints on $\beta[0]$, $\beta[2]$, $\beta[6]$, and $\beta[8]$.

vii. If CORNERS $= 1$, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ and } \beta[3] = 0. \tag{474}$$
$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ and } \beta[5] = 0. \tag{475}$$
$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \text{ and } \beta[7] = 0. \tag{476}$$
$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \text{ and } \beta[7] = 0. \tag{477}$$

viii. If CORNERS $= 2$, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ or } \beta[3] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{478}$$
$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \text{ or } \beta[5] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{479}$$
$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \text{ or } \beta[7] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{480}$$
$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \text{ or } \beta[7] = 0 \text{ or } \texttt{GRADE} \neq 6. \tag{481}$$

(b) If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED}, \tag{482}$$

then the value of PHA for the event is read from the infile.

(c) If

$$\texttt{apply_tgain} = \text{yes}, \tag{483}$$

then

$$\texttt{PHA} = \texttt{PHA} - \text{int}\left[\left(\frac{\texttt{TIME} - \texttt{EPOCH1}}{\texttt{EPOCH2} - \texttt{EPOCH1}}\right)(\delta_2 - \delta_1) + \delta_1 - \epsilon\right], \tag{484}$$

where

$$\begin{aligned}
\mathrm{int} &= \text{the integer portion of (i.e. truncate or round down)}, && (485)\\
\texttt{TIME} &= \text{the time of the event}, && (486)\\
\texttt{EPOCH1} &= \text{a keyword in the } \texttt{tgainfile}, && (487)\\
\texttt{EPOCH2} &= \text{a keyword in the } \texttt{tgainfile}, && (488)\\
\delta_1 &= \left(\frac{\texttt{PHA} - \texttt{PHA}_m[r]}{\texttt{PHA}_{m+1}[r] - \texttt{PHA}_m[r]}\right)(\texttt{DELTPHA1}_{m+1}[r] - \texttt{DELTPHA1}_m[r]) + && (489)\\
&\texttt{DELTPHA1}_m[r], && (490)\\
&\left\{\begin{array}{l}
r \text{ is the row of the } \texttt{tgainfile} \text{ where}\\
\left\{\begin{array}{l}
\texttt{CCD_ID}[r] = \texttt{CCD_ID},\\
\texttt{CHIPX_LO}[r] \le \texttt{CHIPX},\\
\texttt{CHIPX_HI}[r] \ge \texttt{CHIPX},\\
\texttt{CHIPY_LO}[r] \le \mathrm{nint}(\texttt{CHIPY_ADJ}), \text{ and}\\
\texttt{CHIPY_HI}[r] \ge \mathrm{nint}(\texttt{CHIPY_ADJ}).
\end{array}\right.\\
m \text{ is the element of row } r \text{ where}\\
\left\{\begin{array}{l}
\texttt{PHA}_m[r] \le \texttt{PHA} \text{ and}\\
\texttt{PHA}_{m+1}[r] > \texttt{PHA}.\\
\text{If } \texttt{PHA} < \texttt{PHA}_m[r] \text{ for } m = 0, \text{ then } m = 0.\\
\text{If } \texttt{PHA} \ge \texttt{PHA}_m[r] \text{ for } m = M \text{ and } M \text{ is the last element of } \texttt{PHA}[r],\\
\qquad \text{then } m = M - 1.
\end{array}\right.\\
\text{The } \texttt{tgainfile} \text{ includes a binary table with columns named}\\
\qquad \texttt{CCD_ID}, \texttt{CHIPX_LO}, \texttt{CHIPX_HI}, \texttt{CHIPY_LO}, \texttt{CHIPY_HI}, \texttt{PHA}, \texttt{DELTPHA1}, \text{ and}\\
\qquad \texttt{DELTPHA2}.
\end{array}\right. && (491)\\
\delta_2 &= \left(\frac{\texttt{PHA} - \texttt{PHA}_m[r]}{\texttt{PHA}_{m+1}[r] - \texttt{PHA}_m[r]}\right)(\texttt{DELTPHA2}_{m+1}[r] - \texttt{DELTPHA2}_m[r]) + && (492)\\
&\texttt{DELTPHA2}_m[r], && (493)\\
\epsilon &= \text{is a uniform random deviate in the range } [0, 1), && (494)\\
&\left\{\ \text{If } \texttt{rand_pha} = \text{no}, \text{ then } \epsilon = 0.\right. && (495)
\end{aligned}$$

(d) If

$$\texttt{PHA} \ge 32767, \tag{496}$$

then $\texttt{STATUS}[k] = 1$ for bit $k = 3$.

21. `CORN_PHA`:

(a) If

$$\texttt{DATAMODE}_{\mathrm{in}} = \mathrm{CC33_GRADED}, \tag{497}$$

then the value of `CORN_PHA` is read from the `infile`.

22. `ENERGY`:

(a) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and $\texttt{PHA} > 0$, then

i. The row i in the `gainfile` is identified such that

$$\texttt{CCD_ID} = \texttt{CCD_ID}_{\mathrm{gain},i}, \tag{498}$$

$$\texttt{CHIPX_MIN}_{\mathrm{gain},i} \le \texttt{CHIPX} \le \texttt{CHIPX_MAX}_{\mathrm{gain},i}, \qquad \text{and} \tag{499}$$

$$\texttt{CHIPY_MIN}_{\mathrm{gain},i} \le \mathrm{nint}(\texttt{CHIPY_ADJ}) \le \texttt{CHIPY_MAX}_{\mathrm{gain},i}, \tag{500}$$

where $\texttt{CCD_ID}_{\mathrm{gain}}$, $\texttt{CHIPX_MIN}_{\mathrm{gain}}$, $\texttt{CHIPX_MAX}_{\mathrm{gain}}$, $\texttt{CHIPY_MIN}_{\mathrm{gain}}$, and $\texttt{CHIPY_MAX}_{\mathrm{gain}}$ are columns in the `gainfile`.

ii. A uniform random deviate Δp is computed over the interval from $[-0.5, +0.5)$.

iii. The element j of row i of $\mathtt{PHA}_{\mathrm{gain}}$ is identified such that

$$\mathtt{PHA}_{\mathrm{gain},i}[j] \leq (\mathtt{PHA} + \Delta p) < \mathtt{PHA}_{\mathrm{gain},i}[j+1], \tag{501}$$

where $\mathtt{PHA}_{\mathrm{gain}}$ is a vector column in the `gainfile`. If $\mathtt{PHA} + \Delta p < \mathtt{PHA}_{\mathrm{gain},i}[0]$, then $j = 0$. If $\mathtt{PHA}_{\mathrm{gain},i}[\mathtt{NPOINTS} - 2] \leq \mathtt{PHA} + \Delta p$, then $j = \mathtt{NPOINTS} - 2$, where `NPOINTS` is a column in the `gainfile`.

iv. The `ENERGY` of an event is computed from the `PHA` of the event:

$$\begin{aligned}\mathtt{ENERGY} \quad = \quad & \left(\frac{\mathtt{PHA} + \Delta p - \mathtt{PHA}_{\mathrm{gain},i}[j]}{\mathtt{PHA}_{\mathrm{gain},i}[j+1] - \mathtt{PHA}_{\mathrm{gain},i}[j]}\right)(\mathtt{ENERGY}_{\mathrm{gain},i}[j+1] - \mathtt{ENERGY}_{\mathrm{gain},i}[j]) + \\ & \mathtt{ENERGY}_{\mathrm{gain},i}[j],\end{aligned} \tag{502}$$

where $\mathtt{ENERGY}_{\mathrm{gain}}$ is a vector column in the `gainfile`.

v. If $\mathtt{ENERGY} < 0$, then $\mathtt{ENERGY} = 0$.

(b) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and $\mathtt{PHA} \leq 0$, then $\mathtt{ENERGY} = 0$.

(c) If the parameter `calculate_pi` = no or if the parameter `gainfile` is not specified, then

i. If the `infile` includes the `ENERGY` of an event, then the `ENERGY` of the event is equal to the `ENERGY` in the `infile`.

ii. If the `infile` does not include the `ENERGY` of an event, then $\mathtt{ENERGY} = 0$.

23. `PI`:

(a) If

$$\mathtt{calculate_pi} = \mathrm{yes}, \tag{503}$$

then

i.

$$\mathtt{PI} = \mathrm{int}\left(\frac{\mathtt{ENERGY}}{\mathtt{pi_bin_width}}\right) + 1, \tag{504}$$

where "int" indicates the integer portion of what is in parentheses (i.e. the value is truncated or rounded down).

ii. If

$$\mathtt{PI} < 1, \tag{505}$$

then $\mathtt{PI} = 1$.

iii. If

$$\mathtt{PI} > \mathtt{pi_num_bins}, \tag{506}$$

then $\mathtt{PI} = \mathtt{pi_num_bins}$.

(b) If

$$\mathtt{calculate_pi} = \mathrm{no} \tag{507}$$

and the `infile` includes the value of `PI` for an event, then the value of `PI` is read from the `infile`.

24. `pix_adj`:

(a) centroid:

i. If

$$\texttt{pix_adj} = \text{centroid} \tag{508}$$

and

$$\begin{aligned}
\texttt{DATAMODE} &= \text{CC33_FAINT or} && (509)\\
\texttt{DATAMODE} &= \text{FAINT or} && (510)\\
\texttt{DATAMODE} &= \text{FAINT_BIAS or} && (511)\\
\texttt{DATAMODE} &= \text{VFAINT,} && (512)
\end{aligned}$$

then

$$\begin{aligned}
\texttt{CHIPX_ADJ} &= \texttt{CHIPX_ADJ} - w'[0] + w'[2] - w'[3] + w'[5] - w'[6] + w'[8] \text{ and} && (513)\\
\texttt{CHIPY_ADJ} &= \texttt{CHIPY_ADJ} - w'[0] - w'[1] - w'[2] + w'[6] + w'[7] + w'[8], && (514)
\end{aligned}$$

where

$$w'[j] = \frac{w[j]}{\sum_{j=0}^{8} w[j]}, \tag{515}$$

$$w[j] = \begin{cases} p[j] & \text{if the pixel is valid} \\ 0 & \text{if the pixel is invalid,} \end{cases} \tag{516}$$

$$p[j] = \begin{cases} \texttt{PHAS_ADJ}[j] & \text{if } \texttt{apply_cti} = \text{yes} \\ \texttt{PHAS}[j] & \text{if } \texttt{apply_cti} = \text{no,} \end{cases} \tag{517}$$

and the pixel is invalid if

$$\begin{aligned}
\beta[j] &= 0 \text{ or} && (518)\\
\texttt{STATUS}[0] &= 1 \text{ or} && (519)\\
\texttt{STATUS}[1] &= 1 \text{ or} && (520)\\
\texttt{STATUS}[2] &= 1 \text{ or} && (521)\\
\texttt{STATUS}[3] &= 1 \text{ or} && (522)\\
\texttt{STATUS}[4] &= 1 \text{ or} && (523)\\
\texttt{STATUS}[11] &= 1 \text{ or} && (524)\\
\texttt{STATUS}[13] &= 1 \text{ or} && (525)\\
\texttt{STATUS}[14] &= 1 \text{ or} && (526)\\
\texttt{STATUS}[15] &= 1 \text{ or} && (527)\\
\texttt{STATUS}[16] &= 1. && (528)
\end{aligned}$$

ii. If

$$\begin{aligned}
\texttt{pix_adj} &= \text{centroid and} && (529)\\
\texttt{DATAMODE} &= \text{CC33_FAINT,} && (530)
\end{aligned}$$

then

$$\texttt{TIME} = \texttt{TIME} + (w'[0] + w'[1] + w'[2] - w'[6] - w'[7] - w'[8]) \times \texttt{TIMEDEL}_{\text{in}}. \tag{531}$$

Note that it is possible for the centroid algorithm to yield adjustments to CHIPX_ADJ and/or CHIPY_ADJ that are greater than half a pixel. However, the adjustment cannot equal or exceed one pixel.

(b) edser:

i. If

$$\texttt{pix_adj} = \text{edser} \tag{532}$$

and

$$\begin{aligned}
\texttt{DATAMODE} &= \text{CC33_FAINT or} && (533)\\
\texttt{DATAMODE} &= \text{CC33_GRADED or} && (534)\\
\texttt{DATAMODE} &= \text{FAINT or} && (535)\\
\texttt{DATAMODE} &= \text{FAINT_BIAS or} && (536)\\
\texttt{DATAMODE} &= \text{GRADED or} && (537)\\
\texttt{DATAMODE} &= \text{VFAINT,} && (538)
\end{aligned}$$

then

$$\begin{aligned}
\texttt{CHIPX_ADJ} &= \texttt{CHIPX_ADJ} + \left(\frac{\texttt{ENERGY} - E[k]}{E[k+1] - E[k]}\right)(\Delta X[k+1] - \Delta X[k]) + \Delta X[k] \text{ and} && (539)\\
\texttt{CHIPY_ADJ} &= \texttt{CHIPY_ADJ} + \left(\frac{\texttt{ENERGY} - E[k]}{E[k+1] - E[k]}\right)(\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k], && (540)
\end{aligned}$$

where $E[k]$ and $E[k{+}1]$, $\Delta X[k]$ and $\Delta X[k{+}1]$, and $\Delta Y[k]$ and $\Delta Y[k{+}1]$ are the k and $(k{+}1)^{th}$ elements of the vector columns $\texttt{ENERGY}_{\text{subpix}}$, $\texttt{CHIPX_OFFSET}_{\text{subpix}}$, and $\texttt{CHIPY_OFFSET}_{\text{subpix}}$, respectively. These columns are in the HDU of the `subpixfile` where the value of the keyword `CCD_ID` is equal to the value of the `CCD_ID` of the event. The appropriate row of these columns is the one where $\texttt{FLTGRADE}_{\text{subpix}} = \texttt{FLTGRADE}$. The values of k are the ones where

$$\begin{aligned}
\texttt{ENERGY} &\geq E[k] \text{ and} && (541)\\
\texttt{ENERGY} &< E[k+1]. && (542)
\end{aligned}$$

Note that if

$$\texttt{ENERGY} \leq E[0], \tag{543}$$

then $k = 0$. Similarly, if

$$\texttt{ENERGY} \geq E[\texttt{NPOINTS}_{\text{subpix}} - 2], \tag{544}$$

then $k = \texttt{NPOINTS}_{\text{subpix}} - 2$.

ii. If

$$\texttt{pix_adj} = \text{edser} \tag{545}$$

and

$$\begin{aligned}
\texttt{DATAMODE} &= \text{CC33_FAINT or} && (546)\\
\texttt{DATAMODE} &= \text{CC33_GRADED,} && (547)
\end{aligned}$$

then

$$\texttt{TIME} = \texttt{TIME} - \left(\left(\frac{\texttt{ENERGY} - E[k]}{E[k+1] - E[k]}\right)(\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k]\right) \times \texttt{TIMEDEL}_{\text{in}} \tag{548}$$

(c) none:
If

$$\texttt{pix_adj} = \text{none}, \tag{549}$$

then

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX_ADJ} \text{ and} \tag{550}$$
$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_ADJ} \text{ and} \tag{551}$$
$$\texttt{TIME} = \texttt{TIME}. \tag{552}$$

No sub-pixel adjustments are applied to the values of CHIPX_ADJ and CHIPY_ADJ (for timed exposure mode) or CHIPX_ADJ and TIME (for continuous-clocking mode).

(d) randomize:

i. If

$$\texttt{pix_adj} = \text{randomize}, \tag{553}$$

then

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX_ADJ} + \epsilon_x \text{ and} \tag{554}$$
$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_ADJ} + \epsilon_y, \tag{555}$$

where ϵ_x and ϵ_y are a uniform random deviates in the range $[-0.5, +0.5)$ pixel.

ii. If

$$\texttt{DATAMODE} = \text{CC33_FAINT or} \tag{556}$$
$$\texttt{DATAMODE} = \text{CC33_GRADED}, \tag{557}$$

then

$$\texttt{TIME} = \texttt{TIME} - \epsilon_y \times \texttt{TIMEDEL}_{\text{in}}. \tag{558}$$

(e) If

$$\texttt{CHIPX_ADJ} < 0.5, \tag{559}$$

then

$$\texttt{CHIPX_ADJ} = 1. \tag{560}$$

(f) If

$$\texttt{CHIPX_ADJ} \geq 1024.5, \tag{561}$$

then

$$\texttt{CHIPX_ADJ} = 1024. \tag{562}$$

(g) If

$$\texttt{CHIPY_ADJ} < 0.5, \tag{563}$$

then

$$\texttt{CHIPY_ADJ} = 1. \tag{564}$$

(h) If

$$\texttt{CHIPY_ADJ} \geq 1024.5, \tag{565}$$

then

$$\texttt{CHIPY_ADJ} = 1024. \tag{566}$$

25. X and Y:

(a) If

$$\texttt{stop} = \text{sky}, \tag{567}$$

then

i. If

$$\texttt{DATAMODE} = \text{FAINT or} \tag{568}$$
$$\texttt{DATAMODE} = \text{FAINT_BIAS or} \tag{569}$$
$$\texttt{DATAMODE} = \text{GRADED or} \tag{570}$$
$$\texttt{DATAMODE} = \text{VFAINT}, \tag{571}$$

then the values of X and Y are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_ADJ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

ii. If

$$\texttt{DATAMODE} = \text{CC33_FAINT or} \tag{572}$$
$$\texttt{DATAMODE} = \text{CC33_GRADED}, \tag{573}$$

then

A. The values of X and Y are computed using the real-valued coordinates CHIPX_ADJ and $\texttt{CHIPY_TARG}_{\text{eff}}$ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

B. If

$$\texttt{CHIPY_TARG}_{\text{acaoff,med}} < 16.5 \text{ and} \tag{574}$$
$$\texttt{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \tag{575}$$
$$\texttt{CCD_ID} \geq 4, \tag{576}$$

then the values of X and Y are computed using the real-valued coordinates CHIPX_ADJ and $512 + (\texttt{CHIPY_TARG}_{\text{eff}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}})^{\dagger}$ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

iii. If

$$\texttt{acaofffile} \neq \text{none and} \tag{577}$$
$$\texttt{acaofffile} \neq \text{NONE} \tag{578}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{579}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{580}$$

then

$$\texttt{X} = \text{NaN and} \tag{581}$$
$$\texttt{Y} = \text{NaN}. \tag{582}$$

[†]The use of $512 + (\texttt{CHIPY_TARG}_{\text{eff}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}})$, instead of $\texttt{CHIPY_TARG}_{\text{eff}}$, in this situation is intended to be a temporary hack until the function pix_chip_to_fpc, or its equivalent, can handle the negative CHIPY_TARG coordinates that occur for a few grating observations.

iv. If

$$\texttt{fltfile} \neq \text{none and} \tag{583}$$
$$\texttt{fltfile} \neq \text{NONE} \tag{584}$$

and TIME is not in a good-time interval, then

$$\texttt{X} = \text{NaN and} \tag{585}$$
$$\texttt{Y} = \text{NaN.} \tag{586}$$

26. SKY_1D:

(a) If

$$\texttt{DATAMODE} = \text{CC33_FAINT or} \tag{587}$$
$$\texttt{DATAMODE} = \text{CC33_GRADED} \tag{588}$$

and

$$\texttt{stop} = \text{sky,} \tag{589}$$

then

i. A. The value of SKY_1D is computed using the real-valued coordinates CHIPX_ADJ and $\texttt{CHIPY_TARG}_{\text{eff}}$ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

B. If

$$\texttt{CHIPY_TARG}_{\text{acaoff,med}} < 16.5 \text{ and} \tag{590}$$
$$\texttt{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \tag{591}$$
$$\texttt{CCD_ID} \geq 4, \tag{592}$$

then the value of SKY_1D is computed using the real-valued coordinates CHIPX_ADJ and $512 + (\texttt{CHIPY_TARG}_{\text{eff}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}})^{\dagger}$ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

ii. If

$$\texttt{acaofffile} \neq \text{none and} \tag{593}$$
$$\texttt{acaofffile} \neq \text{NONE} \tag{594}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{595}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{596}$$

then

$$\texttt{SKY_1D} = \text{NaN.} \tag{597}$$

iii. If

$$\texttt{fltfile} \neq \text{none and} \tag{598}$$
$$\texttt{fltfile} \neq \text{NONE} \tag{599}$$

and TIME is not in a good-time interval, then

$$\texttt{SKY_1D} = \text{NaN.} \tag{600}$$

27. DETX and DETY:

(a) If

$$\texttt{stop} = \text{det or} \tag{601}$$
$$\texttt{stop} = \text{tan or} \tag{602}$$
$$\texttt{stop} = \text{sky,} \tag{603}$$

then

i. The values of DETX and DETY are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_ADJ and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME.

ii. If

$$\texttt{acaofffile} \neq \text{none and} \tag{604}$$
$$\texttt{acaofffile} \neq \text{NONE} \tag{605}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{606}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{607}$$

then

$$\texttt{DETX} = \text{NaN and} \tag{608}$$
$$\texttt{DETY} = \text{NaN.} \tag{609}$$

iii. If

$$\texttt{fltfile} \neq \text{none and} \tag{610}$$
$$\texttt{fltfile} \neq \text{NONE} \tag{611}$$

and TIME is not in a good-time interval, then

$$\texttt{DETX} = \text{NaN and} \tag{612}$$
$$\texttt{DETY} = \text{NaN.} \tag{613}$$

28. TDETX and TDETY:

(a) If

$$\texttt{stop} = \text{tdet or} \tag{614}$$
$$\texttt{stop} = \text{det or} \tag{615}$$
$$\texttt{stop} = \text{tan or} \tag{616}$$
$$\texttt{stop} = \text{sky} \tag{617}$$

then

i. The values of TDETX and TDETY are computed using the values of nint(CHIPX_ADJ) and nint(CHIPY_ADJ). Here, "nint" indicates that the real-valued coordinate is rounded to the nearest integer.

ii. If

$$\texttt{acaofffile} \neq \text{none and} \tag{618}$$
$$\texttt{acaofffile} \neq \text{NONE} \tag{619}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{620}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{621}$$

then

$$\texttt{TDETX} = \text{NULL and} \tag{622}$$
$$\texttt{TDETY} = \text{NULL.} \tag{623}$$

iii. If

$$\texttt{fltfile} \neq \text{none and} \tag{624}$$
$$\texttt{fltfile} \neq \text{NONE} \tag{625}$$

and `TIME` is not in a good-time interval, then

$$\texttt{TDETX} = \text{NULL and} \tag{626}$$
$$\texttt{TDETY} = \text{NULL.} \tag{627}$$

1.5.4 Write `outfile`

1. `PIX_ADJ`:

   (a) If

$$\texttt{pix_adj} = \text{centroid,} \tag{628}$$

   then

$$\texttt{PIX_ADJ} = \text{CENTROID.} \tag{629}$$

   (b) If

$$\texttt{pix_adj} = \text{edser,} \tag{630}$$

   then

$$\texttt{PIX_ADJ} = \text{EDSER.} \tag{631}$$

   (c) If

$$\texttt{pix_adj} = \text{none,} \tag{632}$$

   then

$$\texttt{PIX_ADJ} = \text{NONE.} \tag{633}$$

(d) If

$$\texttt{pix_adj} = \text{randomize}, \tag{634}$$

then

$$\texttt{PIX_ADJ} = \text{RANDOMIZE}. \tag{635}$$

2. `RAND_SKY`:

(a) If

$$\texttt{pix_adj} = \text{centroid}, \tag{636}$$

then

$$\texttt{RAND_SKY} = 0.0. \tag{637}$$

(b) If

$$\texttt{pix_adj} = \text{edser}, \tag{638}$$

then

$$\texttt{RAND_SKY} = 0.0. \tag{639}$$

(c) If

$$\texttt{pix_adj} = \text{none}, \tag{640}$$

then

$$\texttt{RAND_SKY} = 0.0. \tag{641}$$

(d) If

$$\texttt{pix_adj} = \text{randomize}, \tag{642}$$

then

$$\texttt{RAND_SKY} = 0.5. \tag{643}$$

3. `TIME_ADJ`:

(a) Timed-exposure mode:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \tag{644}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \tag{645}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{GRADED or} \tag{646}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT}, \tag{647}$$

then

$$\texttt{TIME_ADJ} = \text{NONE}. \tag{648}$$

(b) Continuous-clocking mode:

i. Set

$$\texttt{TIME_ADJ} = \text{MIDCHIP}. \tag{649}$$

ii. If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{650}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{651}$$

and

$$\texttt{acaofffile} \neq \text{none and} \tag{652}$$
$$\texttt{acaofffile} \neq \text{NONE}, \tag{653}$$

then

$$\texttt{TIME_ADJ} = \text{TARGET}. \tag{654}$$

iii. If

$$\texttt{OBS_MODE} = \text{pointing or} \tag{655}$$
$$\texttt{OBS_MODE} = \text{POINTING} \tag{656}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1}, \tag{657}$$

then

$$\texttt{TIME_ADJ} = \text{GRATING}. \tag{658}$$

2 TBD

- Complete the spec to include all of the timed exposure mode processing.
- Complete sections 1.1, 1.2, 1.3, and 1.4.
- Should `CONTENT`s other than EVT0, EVT1, TGEVT1, and EVT2 be included?
- Should `CONTENT` = EVT2 be dropped?
- Should `DATAMODE`s other than CC33_FAINT, CC33_GRADED, FAINT, FAINT_BIAS, GRADED, and VFAINT be included?
- Are the `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, and `TIMEDEL` keywords in the output of afe (need `obsfile` sometimes)?
- What if `TIME_RO` is not in the `infile` (output of afe? EVT2 files?)?
- Make sure that the `STATUS` bits are unset and reset properly.
- What about aoff and soff files instead of asol files?
- Are the β in `PHA_RO` the same as the β in `PHA`?
- Should something be done about `SKY_1D`?
- Drop the hack when `pix_chip_to_fpc` can handle negative $\texttt{CHIPY_TARG}_{\text{eff}}$ coordinates while computing the coordinates `X`, `Y`, and `SKY_1D`.