




MIT Kavli Institute



Chandra X-Ray Center

## MEMORANDUM

December 14, 2015

**To:** Jonathan McDowell, SDS Group Leader  
**From:** Glenn E. Allen, SDS  
**Subject:** `acis_process_events` spec  
**Revision:** 4.07  
**URL:** <http://space.mit.edu/CXC/docs/docs.html#ape>  
**File:** `/nfs/inconceivable/d0/sds/specs/acis_process_events/ape_spec_4.07.tex`

### 1 `acis_process_events`

This spec, which is incomplete, describes some of processing steps for continuous-clocking mode data.

#### 1.1 Description

#### 1.2 Input

#### 1.3 Output

#### 1.4 Parameters

#### 1.5 Processing

##### 1.5.1 Error checking

The following steps are performed once prior to the processing of the data for each input ACIS event.

1. `obsfile`:

(a) Validation:

i. Existence:

If

`obsfile`  $\neq$  `none` and (1)

`obsfile`  $\neq$  `NONE` (2)

and the `obsfile` does not exist, then `obsfile` is changed to “none” and `acis_process_events` produces a warning message.

ii. Permission:

If

`obsfile`  $\neq$  none and (3)

`obsfile`  $\neq$  NONE (4)

and the file permissions do not allow the `obsfile` to be read, then `obsfile` is changed to “none” and `acis_process_events` produces a warning message.

iii. OBS\_MODE:

If

`obsfile`  $\neq$  none and (5)

`obsfile`  $\neq$  NONE, (6)

then

A. If the `obsfile` does not include the keyword `obs_mode`, then `OBS_MODE` is set to “none”.

B. If the `obsfile` includes the keyword `obs_mode` and

`obs_mode` = pointing or (7)

`obs_mode` = POINTING or (8)

`obs_mode` = secondary or (9)

`obs_mode` = SECONDARY, (10)

then `OBS_MODE` is set to the value of `obs_mode`. Hereafter this keyword is referred to as `OBS_MODE`.

C. If the `obsfile` includes the keyword `obs_mode` and

`obs_mode`  $\neq$  pointing and (11)

`obs_mode`  $\neq$  POINTING and (12)

`obs_mode`  $\neq$  secondary and (13)

`obs_mode`  $\neq$  SECONDARY, (14)

then `OBS_MODE` is set to “none”.

2. `acaofffile`:

(a) Validation:

If

`OBS_MODE` = pointing or (15)

`OBS_MODE` = POINTING, (16)

then

i. Setting:

If

`acaofffile` = none or (17)

`acaofffile` = NONE, (18)

then `acis_process_events` produces a warning message.

ii. Existence:

If

$$\text{acaofffile} \neq \text{none} \text{ and} \tag{19}$$

$$\text{acaofffile} \neq \text{NONE} \tag{20}$$

and the `acaofffile` does not exist, then `acis_process_events` produces a warning and `acaofffile` is set to “none.”

iii. Permission:

If the `acaofffile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

iv. CONTENT:

If the `acaofffile` does not have an HDU  $h_{\text{acaoff}}$  with the keyword

$$\text{CONTENT} = \text{ASPSOL} \text{ or} \tag{21}$$

$$\text{CONTENT} = \text{OBCSOL}, \tag{22}$$

then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

v. Keyword:

If HDU  $h_{\text{acaoff}}$  of the `acaofffile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

vi. Columns:

If HDU  $h_{\text{acaoff}}$  of the `acaofffile` does not include the columns `TIME`, `RA`, `DEC`, and `ROLL` then `acis_process_events` produces a warning message and `acaofffile` is set to “none.” Hereafter, these columns are referred to as  $\text{TIME}_{\text{acaoff}}$ ,  $\text{RA}_{\text{acaoff}}$ ,  $\text{DEC}_{\text{acaoff}}$ , and  $\text{ROLL}_{\text{acaoff}}$ .

vii. Sequential:

If more than one valid `acaofffile` is specified and the the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

3. `alignmentfile`:

(a) Validation:

If

$$\text{OBS\_MODE} = \text{pointing} \text{ or} \tag{23}$$

$$\text{OBS\_MODE} = \text{POINTING}, \tag{24}$$

then

i. Setting:

If

$$\text{alignmentfile} = \text{none} \text{ or} \tag{25}$$

$$\text{alignmentfile} = \text{NONE}, \tag{26}$$

then `acis_process_events` produces a warning message.

ii. Existence:

If

$$\text{alignmentfile} \neq \text{none} \text{ and} \tag{27}$$

$$\text{alignmentfile} \neq \text{NONE} \tag{28}$$

and the `alignmentfile` does not exist, then `acis_process_events` produces a warning message and `alignmentfile` is set to “none.”

iii. Permission:

If the `alignmentfile` exists and the file permissions do not allow it to be read, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

iv. CONTENT:

If the `alignmentfile` does not have an HDU  $h_{\text{alignment}}$  with the keyword

$$\text{CONTENT} = \text{ASPSOL or} \tag{29}$$

$$\text{CONTENT} = \text{OBCSOL,} \tag{30}$$

then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

v. Keyword:

If HDU  $h_{\text{alignment}}$  of the `alignmentfile` does not include the keyword TSTART, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

vi. Columns:

If HDU  $h_{\text{alignment}}$  of the `alignmentfile` does not include the columns DY, DZ, and DTHETA then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

vii. Sequential:

If more than one valid `alignmentfile` is specified and the values TSTART are not in increasing order, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

#### 4. infile:

(a) Existence:

If the `infile` does not exist, then `acis-process_events` exits with an error message.

(b) Permission:

If the `infile` exists and the file permissions do not allow it to be read, then `acis-process_events` exits with an error message.

(c) Validation:

i. OBS\_MODE:

If `OBS_MODE = none`, then

A. The `OBS_MODE` is read from the HDU  $h_{\text{in}}$  keyword of the same name. Hereafter this keyword is referred to as `OBS_MODE`.

B. If the HDU  $h_{\text{in}}$  does not include the keyword `OBS_MODE`, then `OBS_MODE` is set to “none” and `acis-process_events` produces a warning message.

C. If the HDU  $h_{\text{in}}$  includes the keyword `OBS_MODE` and

$$\text{obs\_mode} \neq \text{pointing and} \tag{31}$$

$$\text{obs\_mode} \neq \text{POINTING and} \tag{32}$$

$$\text{obs\_mode} \neq \text{secondary and} \tag{33}$$

$$\text{obs\_mode} \neq \text{SECONDARY,} \tag{34}$$

then `OBS_MODE` is set to “none” and `acis-process_events` produces a warning message.

ii. DATAMODE:

The `DATAMODE` is read from the HDU  $h_{\text{in}}$  keyword of the same name. If the HDU  $h_{\text{in}}$  does not include the keyword `DATAMODE` or if

$$\text{DATAMODE} \neq \text{CC33\_FAINT and} \tag{35}$$

$$\text{DATAMODE} \neq \text{CC33\_GRADED and} \tag{36}$$

$$\text{DATAMODE} \neq \text{FAINT and} \tag{37}$$

$$\text{DATAMODE} \neq \text{FAINT\_BIAS} \text{ and} \quad (38)$$

$$\text{DATAMODE} \neq \text{GRADED} \text{ and} \quad (39)$$

$$\text{DATAMODE} \neq \text{VFAINT}, \quad (40)$$

then `acis_process_events` exits with an error message. Hereafter, the value of this keyword is referred to as `DATAMODEin`.

iii. `CONTENT`:

If the `infile` does not have an HDU `hin` with the keyword

$$\text{CONTENT} = \text{EVT0} \text{ or} \quad (41)$$

$$\text{CONTENT} = \text{EVT1} \text{ or} \quad (42)$$

$$\text{CONTENT} = \text{TGEVT1} \text{ or} \quad (43)$$

$$\text{CONTENT} = \text{EVT2}, \quad (44)$$

then `acis_process_events` exits with an error message. Hereafter, the value of this keyword is referred to as `CONTENTin`.

iv. `TIME`:

If HDU `hin` of the `infile` does not include the column `TIME`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `TIMEin`.

v. `TIME_RO`:

If

$$\text{DATAMODE}_{in} = \text{CC33\_FAINT} \text{ or} \quad (45)$$

$$\text{DATAMODE}_{in} = \text{CC33\_GRADED} \quad (46)$$

and

$$\text{CONTENT}_{in} = \text{EVT1} \text{ or} \quad (47)$$

$$\text{CONTENT}_{in} = \text{TGEVT1} \text{ or} \quad (48)$$

$$\text{CONTENT}_{in} = \text{EVT2} \quad (49)$$

and HDU `hin` of the `infile` does not include the column `TIME_RO`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `TIME_ROin`.

vi. `EXPNO`:

If HDU `hin` the `infile` does not include the column `EXPNO`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `EXPNOin`.

vii. `CCD_ID`:

A. If

$$\text{CONTENT}_{in} = \text{EVT0} \quad (50)$$

and HDU `hin` of the `infile` does not include the keyword `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this keyword is referred to as `CCD_IDin`.

B. If

$$\text{CONTENT}_{in} = \text{EVT1} \text{ or} \quad (51)$$

$$\text{CONTENT}_{in} = \text{TGEVT1} \text{ or} \quad (52)$$

$$\text{CONTENT}_{in} = \text{EVT2} \quad (53)$$

and HDU `hin` of the `infile` does not include the column `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CCD_IDin`.

viii. CCDX:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (54)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CCDX` and does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as `CCDXin` and `CHIPXin`, respectively.

ix. CHIPX:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (55)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (56)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (57)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CHIPXin`.

x. CCDY:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (58)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (59)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (60)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (61)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFaint} \quad (62)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CCDY` and does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as `CCDYin` and `CHIPYin`, respectively.

xi. TROW:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (63)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (64)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (65)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `TROW` and does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as `TROWin` and `CHIPYin`, respectively.

xii. CHIPY:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (66)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (67)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (68)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CHIPYin`.

xiii. TIMEDEL:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (69)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (70)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the keyword `TIMEDEL`, then `acis_process_events` exits with an error message. Hereafter this keyword is referred to as `TIMEDELin`.

xiv. `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, `DEC_PNT`, `CHIPY_TG`, and `TG_M`:

If

$$\text{OBS\_MODE} = \text{pointing or} \quad (71)$$

$$\text{OBS\_MODE} = \text{POINTING} \quad (72)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (73)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED,} \quad (74)$$

then

A. `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, `DEC_PNT`:

If HDU  $h_{\text{in}}$  of the `infile` does not include the keywords `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, and `DEC_PNT`, then `acis_process_events` exits with an error message. Hereafter these keywords are referred to as `RA_TARGin`, `DEC_TARGin`, `RA_NOMin`, `DEC_NOMin`, `RA_PNTin`, and `DEC_PNTin`, respectively.

B. `CHIPY_TG` and `TG_M`:

If

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (75)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the columns `CHIPY_TG` and `TG_M`, then `acis_process_events` exits with an error message. Hereafter these columns are referred to as `CHIPY_TGin` and `TG_Min`, respectively.

xv. `TGAINCOR`:

If HDU  $h_{\text{in}}$  of the `infile` does not include the keyword `TGAINCOR`, then this keyword is set to zero. Hereafter, this keyword is referred to as `TGAINCORin`.

5. `stop`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{stop} \neq \text{none and} \quad (76)$$

$$\text{stop} \neq \text{chip and} \quad (77)$$

$$\text{stop} \neq \text{tdet and} \quad (78)$$

$$\text{stop} \neq \text{det and} \quad (79)$$

$$\text{stop} \neq \text{tan and} \quad (80)$$

$$\text{stop} \neq \text{sky,} \quad (81)$$

then `stop` is changed to “none” and `acis_process_events` produces a warning message.

ii. OBS\_MODE:

If

OBS\_MODE  $\neq$  pointing and (82)

OBS\_MODE  $\neq$  POINTING (83)

and

stop  $\neq$  none and (84)

stop  $\neq$  chip and (85)

stop  $\neq$  tdet, (86)

then stop is changed to “tdet” and acis\_process\_events produces a warning message.

iii. acaofffile:

If

OBS\_MODE = pointing or (87)

OBS\_MODE = POINTING (88)

and

acaofffile = none and (89)

stop  $\neq$  none and (90)

stop  $\neq$  chip and (91)

stop  $\neq$  tdet, (92)

then acis\_process\_events produces a warning message and stop is changed to “none.”

iv. alignmentfile:

If

OBS\_MODE = pointing or (93)

OBS\_MODE = POINTING (94)

and

alignmentfile = none and (95)

stop  $\neq$  none and (96)

stop  $\neq$  chip and (97)

stop  $\neq$  tdet, (98)

then acis\_process\_events produces a warning message and stop is changed to “none.”

6. doevtgrade:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

If

doevtgrade  $\neq$  yes and (99)

doevtgrade  $\neq$  no, (100)

then acis\_process\_events exits with an error message.



7. `apply_cti`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{apply\_cti} \neq \text{yes and} \quad (101)$$
$$\text{apply\_cti} \neq \text{no,} \quad (102)$$

then `acis_process_events` exits with an error message.

ii. PHAS:

If

$$\text{apply\_cti} = \text{yes} \quad (103)$$

and the `infile` does not include the column PHAS, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. `doevtgrade`:

If

$$\text{apply\_cti} = \text{yes and} \quad (104)$$
$$\text{doevtgrade} = \text{no,} \quad (105)$$

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

8. `badpixfile`:

(a) Validation:

i. Existence:

If

$$\text{badpixfile} \neq \text{none and} \quad (106)$$
$$\text{badpixfile} \neq \text{NONE} \quad (107)$$

and the `badpixfile` does not exist, then `badpixfile` is changed to “none” and `acis-process_events` produces a warning message.

ii. Permission:

If

$$\text{badpixfile} \neq \text{none and} \quad (108)$$
$$\text{badpixfile} \neq \text{NONE} \quad (109)$$

and the file permissions do not allow it to be read, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message.

iii. CONTENT:

If

$$\text{badpixfile} \neq \text{none and} \quad (110)$$
$$\text{badpixfile} \neq \text{NONE} \quad (111)$$

and the `badpixfile` does not have one or more HDUs  $h_{\text{badpix}}$  with the keyword

$$\text{CONTENT} = \text{BADPIX or} \quad (112)$$

$$\text{CONTENT} = \text{CDB\_ACIS\_BADPIX}, \quad (113)$$

then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message.

iv. Keyword:

If

$$\text{badpixfile} \neq \text{none and} \quad (114)$$

$$\text{badpixfile} \neq \text{NONE} \quad (115)$$

and the HDU(s)  $h_{\text{badpix}}$  of the `badpixfile` do not include the keyword `CCD_ID`, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message. Hereafter this keyword is referred to as `CCD_IDbadpix`.

v. Columns:

If

$$\text{badpixfile} \neq \text{none and} \quad (116)$$

$$\text{badpixfile} \neq \text{NONE} \quad (117)$$

and the HDU(s)  $h_{\text{badpix}}$  of the `badpixfile` do not include the columns `CHIPX`, `CHIPY`, `TIME`, `TIME_STOP`, and `STATUS`, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `CHIPXbadpix`, `CHIPYbadpix`, `TIMEbadpix`, `TIME_STOPbadpix`, and `STATUSbadpix`, respectively.

9. `ctifile`:

(a) Validation:

If

$$\text{ctifile} \neq \text{caldb and} \quad (118)$$

$$\text{ctifile} \neq \text{CALDB}, \quad (119)$$

then

i. Existence:

If the `ctifile` does not exist, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If the `ctifile` exists and the file permissions do not allow it to be read, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. `CONTENT`:

If the `ctifile` does not have one or more HDUs  $h_{\text{cti}}$  with the keyword

$$\text{CONTENT} = \text{CDB\_ACIS\_CTI}, \quad (120)$$

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iv. Columns:

If the first such HDU of the `ctifile` does not include the columns `CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `PHA`, `VOLUME_X`, `VOLUME_Y`, `FRCTRLX`, `FRCTRLY`, `TCTIX`, and `TCTIY`, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

10. `clobber`:

(a) Lowercase:  
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{clobber} \neq \text{yes and} \tag{121}$$
$$\text{clobber} \neq \text{no}, \tag{122}$$

then `clobber` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If

$$\text{clobber} = \text{yes} \tag{123}$$

and the `outfile` exists and the file permissions of the `outfile` do not allow it to be overwritten, then `acis_process_events` exits with an error message.

iii. Don't overwrite:

If

$$\text{clobber} = \text{no} \tag{124}$$

and the `outfile` exists, then `acis_process_events` exits with an error message.

11. `pix_adj`:

(a) Lowercase:  
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{pix\_adj} \neq \text{centroid and} \tag{125}$$
$$\text{pix\_adj} \neq \text{edser and} \tag{126}$$
$$\text{pix\_adj} \neq \text{none and} \tag{127}$$
$$\text{pix\_adj} \neq \text{randomize}, \tag{128}$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:

If

$$\text{OBS\_MODE} \neq \text{pointing and} \tag{129}$$
$$\text{OBS\_MODE} \neq \text{POINTING} \tag{130}$$

and

$$\text{pix\_adj} \neq \text{none}, \tag{131}$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iii. stop:

If

$$\text{pix\_adj} = \text{centroid or} \quad (132)$$

$$\text{pix\_adj} = \text{edser or} \quad (133)$$

$$\text{pix\_adj} = \text{randomize} \quad (134)$$

and

$$\text{stop} \neq \text{sky}, \quad (135)$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iv. PHAS:

If

$$\text{pix\_adj} = \text{centroid} \quad (136)$$

and the `infile` does not include the column PHAS, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

v. FLTGRADE:

If

$$\text{pix\_adj} = \text{edser} \quad (137)$$

and

$$\text{DATAMODE} = \text{CC33\_GRADED or} \quad (138)$$

$$\text{DATAMODE} = \text{GRADED} \quad (139)$$

and the `infile` does not include the column FLTGRADE, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

12. `subpixfile`:

(a) If

$$\text{pix\_adj} = \text{edser}, \quad (140)$$

then

i. Existence:

If the `subpixfile` does not exist, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

ii. Permission:

If the `subpixfile` exists and the file permissions do not allow it to be read, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iii. Validation:

A. CONTENT:

If the `subpixfile` does not have one or more HDUs  $h_{\text{subpix}}$  with the keyword

$$\text{CONTENT} = \text{AXAF\_SUBPIX}, \quad (141)$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

B. Keyword:

If the HDUs  $h_{\text{subpix}}$  of the `subpixfile` do not include the keyword `CCD_ID`, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

C. Columns:

If the HDUs  $h_{\text{subpix}}$  of the `subpixfile` do not include binary tables with the columns `FLTGRADE`, `NPOINTS`, `ENERGY`, `CHIPX_OFFSET`, and `CHIPY_OFFSET`, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `FLTGRADEsubpix`, `NPOINTSsubpix`, `ENERGYsubpix`, `CHIPX_OFFSETsubpix`, and `CHIPY_OFFSETsubpix`, respectively.

### 1.5.2 Initializations

1. Focal-point CCD:

If

$$\text{OBS\_MODE} = \text{pointing or} \quad (142)$$

$$\text{OBS\_MODE} = \text{POINTING} \quad (143)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (144)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (145)$$

then the values of `RA_PNTin` and `DEC_PNTin` are used to determine the `CCD_ID` associated with the focal point. Hereafter this value is referred to as `CCD_IDfocus*`.

2. `acaofffile`:

If

$$\text{OBS\_MODE} = \text{pointing or} \quad (146)$$

$$\text{OBS\_MODE} = \text{POINTING} \quad (147)$$

and

$$\text{acaofffile} \neq \text{none and} \quad (148)$$

$$\text{alignmentfile} \neq \text{none}, \quad (149)$$

then

(a) `TIMEmin` and `TIMEmax`:

The `acaofffile` data are processed to determine the earliest and latest times for which there is aspect information:

$$\text{TIME}_{\text{min}} = \min(\text{TIME}_{\text{acaoff}}) \text{ and} \quad (150)$$

$$\text{TIME}_{\text{max}} = \max(\text{TIME}_{\text{acaoff}}). \quad (151)$$

(b) `CHIPX_TARGacaoff,med`, `CHIPY_TARGacaoff,med`:

The values of `CHIPX_TARGacaoff` and `CHIPY_TARGacaoff` are computed from the values of `RA_TARG` and `DEC_TARG` using the orientation of the telescope (i.e. `RA`, `DEC`, and `ROLL`) and the orientation of the SIM (i.e. `DY`, `DZ`, and `DTHETA`) and the `TIMES` in the `acaofffile`. The values of `CHIPX_TARGacaoff` and `CHIPY_TARGacaoff` are processed to obtain the median values:

$$\text{CHIPX\_TARG}_{\text{acaoff,med}} = \text{median}(\text{CHIPX\_TARG}_{\text{acaoff}}) \text{ and} \quad (152)$$

$$\text{CHIPY\_TARG}_{\text{acaoff,med}} = \text{median}(\text{CHIPY\_TARG}_{\text{acaoff}}). \quad (153)$$

---

\*The focal point is the location associated with the optical axis in the absence of dither. This location should not be confused with the aim point, which is the location illuminated by an undithered point source provided that the source is not offset from the target location.

### 1.5.3 Loop over events

The following steps are performed, in sequence, for each event.

#### 1. STATUS:

##### (a) Exists:

If HDU  $h_{\text{in}}$  of the `infile` includes a 32-bit column named `STATUS`, then

- i. The values of the bits for an event are read from the `infile`.
- ii. The value of `STATUS[k]` is set to zero for bits  $k = 1-5, 14, 16-19, \text{ and } 23$  (of 0–31), bits that can be set by `acis_process_events`.
- iii. If

$$\text{doevtgrade} = \text{yes}, \tag{154}$$

then the value of `STATUS[20]`, the other bit that can be set by `acis_process_events`, is set to zero.

##### (b) Does not exist:

If HDU  $h_{\text{in}}$  does not include a 32-bit column named `STATUS`, then

- i. A set of 32 bits are allocated for the event.
- ii. The values of the 32 bits are initialized to zero.

#### 2. EXPNO:

##### (a) Read:

The value of `EXPNO` for an event is given by `EXPNOin`.

##### (b) Validation:

If

$$\text{EXPNO} < 0 \text{ or} \tag{155}$$

$$\text{EXPNO} \geq 10^8, \tag{156}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

#### 3. CCD\_ID:

##### (a) Read:

The value of `CCD_ID` for an event is given by `CCD_IDin`.

##### (b) Validation:

If

$$\text{CCD\_ID} < 0 \text{ or} \tag{157}$$

$$\text{CCD\_ID} > 9, \tag{158}$$

then `acis_process_events` exits with an error message because `CCD_ID`-dependent computations could fail if the value of `CCD_ID` is unphysical.

#### 4. CHIPX:

##### (a) Read:

- i. If the `infile` includes the column `CHIPX`, then the value of `CHIPX` for an event is given by

$$\text{CHIPX} = \text{CHIPX}_{\text{in}}. \tag{159}$$

- ii. If the `infile` does not include the column `CHIPX`, then the value of `CHIPX` for an event is given by

$$\text{CHIPX} = \text{CCDX}_{\text{in}} + 1. \quad (160)$$

(b) Validation:

- i. Unphysical:  
If

$$\text{CHIPX} < 1 \text{ or} \quad (161)$$

$$\text{CHIPX} > 1024, \quad (162)$$

then `acis_process_events` exits with an error message because `CHIPX`-dependent computations could fail if the value of `CHIPX` is unphysical.

- ii. Unexpected:  
If

$$\text{CHIPX} = 1 \text{ or} \quad (163)$$

$$\text{CHIPX} = 1024, \quad (164)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

5. `CHIPX_ADJ`:

- (a) Initialize:

$$\text{CHIPX\_ADJ} = \text{CHIPX}. \quad (165)$$

6. `NODE_ID`:

- (a) Calculate:

The `NODE_ID` of an event is given by

$$\text{NODE\_ID} = \text{int} \left( \frac{\text{CHIPX} - 1}{256} \right), \quad (166)$$

where “int” means the integer portion of (i.e. truncate or round down) the quantity in parentheses.

7. `CHIPY`:

- (a) Read:

- i. If the `infile` includes the column `CHIPY`, then the value of `CHIPY` for an event is given by

$$\text{CHIPY} = \text{CHIPY}_{\text{in}}. \quad (167)$$

- ii. If the `infile` does not include the column `CHIPY` and

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (168)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (169)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (170)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT}, \quad (171)$$

then the value of `CHIPY` for an event is given by

$$\text{CHIPY} = \text{CCDY}_{\text{in}} + 1. \quad (172)$$

iii. If the `infile` does not include the column `CHIPY` and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (173)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (174)$$

then the value of `CHIPY` for an event is given by

$$\text{CHIPY} = \text{TROW}_{\text{in}} + 1. \quad (175)$$

(b) Validation:

i. Unphysical:

A. Timed-exposure mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (176)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (177)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (178)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (179)$$

and

$$\text{CHIPY} < 1 \text{ or} \quad (180)$$

$$\text{CHIPY} > 1024, \quad (181)$$

then `acis_process_events` exits with an error message because `CHIPY`-dependent computations could fail if the value of `CHIPY` is unphysical.

B. Continuous-clocking mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (182)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (183)$$

and

$$\text{CHIPY} < 1 \text{ or} \quad (184)$$

$$\text{CHIPY} > 512, \quad (185)$$

then `acis_process_events` exits with an error message because the `CHIPY` value is out of range and `CHIPY`-dependent computations could fail if the value of `CHIPY` is unphysical (especially if it is less than 1).

ii. Unexpected:

A. `FAINT`, `FAINT_BIAS`, or `GRADED`:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (186)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (187)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \quad (188)$$

and

$$\text{CHIPY} = 1 \text{ or} \quad (189)$$

$$\text{CHIPY} = 1024, \quad (190)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.



B. VFAINT:

If

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (191)$$

and

$$\text{CHIPY} = 1 \text{ or} \quad (192)$$

$$\text{CHIPY} = 2 \text{ or} \quad (193)$$

$$\text{CHIPY} = 1023 \text{ or} \quad (194)$$

$$\text{CHIPY} = 1024, \quad (195)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or another of these conditions is true. Although these values are not unphysical, they should not occur.

C. CC33\_FAINT or CC33\_GRADED:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (196)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (197)$$

and

$$\text{CHIPY} = 1 \text{ or} \quad (198)$$

$$\text{CHIPY} = 512, \quad (199)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

8. TIME\_RO:

(a) Continuous-clocking mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (200)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (201)$$

then

i. Read:

A. Level 0:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT0}, \quad (202)$$

then the value of `TIME_RO` for an event is given by `TIMEin`.

B. Level 1, 1.5, or 2:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (203)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (204)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (205)$$

and

$$\text{TIME\_RO}_{\text{in}} > 0, \quad (206)$$

then

$$\text{TIME\_RO} = \text{TIME\_RO}_{\text{in}}. \quad (207)$$

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (208)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (209)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (210)$$

and

$$\text{TIME\_RO}_{\text{in}} = 0, \quad (211)$$

then

$$\text{TIME\_RO} = \text{TIME}_{\text{in}}. \quad (212)$$

ii. Validation:  
If

$$\text{TIME\_RO} < 0 \text{ or} \quad (213)$$

$$\text{TIME\_RO} \geq 3 \times 10^9, \quad (214)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

#### 9. `CHIPX_TARGevt`, `CHIPY_TARGevt`, and `CHIPY_TARGeff`:

The coordinate `CHIPY_TARGeff` is used to compute the coordinates X, Y, and SKY\_1D.

(a) Approximate:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (215)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (216)$$

and

$$\text{acaofffile} \neq \text{none and} \quad (217)$$

$$\text{acaofffile} \neq \text{NONE}, \quad (218)$$

then:

i. Initial values:

The values of `CHIPX_TARGevt` and `CHIPY_TARGevt` are computed from the values of `RA_TARG` and `DEC_TARG` using the value of `CCD_IDfocus` and using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time given by  $\text{TIME\_RO} - (\text{CHIPY\_TARG}_{\text{acaoff,med}} + 1028) \times \text{TIMEDEL}$ . The value of `CHIPY_TARGevt` can be negative.

ii. ACIS-I0 or -I2:

If

$$\text{CCD\_ID}_{\text{focus}} = 0 \text{ or} \quad (219)$$

$$\text{CCD\_ID}_{\text{focus}} = 2, \quad (220)$$

then

A. If

$$\text{CCD\_ID} = 0 \text{ or} \quad (221)$$

$$\text{CCD\_ID} = 2, \quad (222)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = \text{CHIPY\_TARG}_{\text{evt}}. \quad (223)$$

B. If

$$\text{CCD\_ID} = 1 \text{ or} \quad (224)$$

$$\text{CCD\_ID} = 3, \quad (225)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPY\_TARG}_{\text{evt}} - \text{CHIPY\_TARG}_{\text{acaoff,med}}). \quad (226)$$

C. If

$$\text{CCD\_ID} \geq 4, \quad (227)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (228)$$

iii. ACIS-I1 or -I3:

If

$$\text{CCD\_ID}_{\text{focus}} = 1 \text{ or} \quad (229)$$

$$\text{CCD\_ID}_{\text{focus}} = 3, \quad (230)$$

then

A. If

$$\text{CCD\_ID} = 0 \text{ or} \quad (231)$$

$$\text{CCD\_ID} = 2, \quad (232)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPY\_TARG}_{\text{evt}} - \text{CHIPY\_TARG}_{\text{acaoff,med}}). \quad (233)$$

B. If

$$\text{CCD\_ID} = 1 \text{ or} \quad (234)$$

$$\text{CCD\_ID} = 3, \quad (235)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = \text{CHIPY\_TARG}_{\text{evt}}. \quad (236)$$

C. If

$$\text{CCD\_ID} \geq 4, \quad (237)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 + (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (238)$$

iv. ACIS-S:

If

$$\text{CCD\_ID}_{\text{focus}} \geq 4, \quad (239)$$

then

A. If

$$\text{CCD\_ID} = 0 \text{ or} \quad (240)$$

$$\text{CCD\_ID} = 2, \quad (241)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 + (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (242)$$

B. If

$$\text{CCD\_ID} = 1 \text{ or} \quad (243)$$

$$\text{CCD\_ID} = 3, \quad (244)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (245)$$

C. If

$$\text{CCD\_ID} \geq 4, \quad (246)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = \text{CHIPY\_TARG}_{\text{evt}}. \quad (247)$$

(b) Validation:

If

$$\text{CHIPY\_TARG}_{\text{eff}} < -256 \text{ or} \quad (248)$$

$$\text{CHIPY\_TARG}_{\text{eff}} \geq 1280, \quad (249)$$

then `acis_process_events` produces a warning message.

10. TG\_M:

(a) Continuous-clocking mode with gratings:

If

$$\text{OBS\_MODE} = \text{pointing or} \quad (250)$$

$$\text{OBS\_MODE} = \text{POINTING} \quad (251)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (252)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (253)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (254)$$

then

i. Read:

The value of `TG_M` for an event is given by `TG_Min`.

ii. Validation:

A. If

$$\text{TG\_M} < -99, \quad (255)$$

then

$$\text{TG\_M} = -99 \quad (256)$$

and `acis_process_events` produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

B. If

$$\text{TG\_M} > 99, \quad (257)$$

then

$$\text{TG\_M} = 99 \quad (258)$$

and `acis_process_events` produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

## 11. CHIPY\_TG:

(a) Continuous-clocking mode with gratings:

If

$$\text{OBS\_MODE} = \text{pointing or} \quad (259)$$

$$\text{OBS\_MODE} = \text{POINTING} \quad (260)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (261)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (262)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (263)$$

then

i. Read:

The value of `CHIPY_TG` for an event is given by `CHIPY_TGin`.

ii. Validation:

A. If

$$\text{TG\_M} > -99 \text{ and} \quad (264)$$

$$\text{TG\_M} < 99 \text{ and} \quad (265)$$

$$\text{CHIPY\_TG} \neq \text{NULL} \quad (266)$$

and

$$\text{CHIPY\_TG} \leq 0 \text{ or} \quad (267)$$

$$\text{CHIPY\_TG} \geq 1025, \quad (268)$$

then `acis_process_events` exits with an error message because `CHIPY_TG`-dependent computations could fail if the value of `CHIPY_TG` is unphysical.

B. If

$$\text{TG\_M} > -99 \text{ and} \quad (269)$$

$$\text{TG\_M} < 99 \text{ and} \quad (270)$$

$$\text{CHIPY\_TG} \neq \text{NULL} \text{ and} \quad (271)$$

$$\text{CHIPY\_TG} < 1, \quad (272)$$

then

$$\text{CHIPY\_TG} = 1. \quad (273)$$

C. If

$$\text{TG\_M} > -99 \text{ and} \quad (274)$$

$$\text{TG\_M} < 99 \text{ and} \quad (275)$$

$$\text{CHIPY\_TG} \neq \text{NULL} \text{ and} \quad (276)$$

$$\text{CHIPY\_TG} > 1024, \quad (277)$$

then

$$\text{CHIPY\_TG} = 1024. \quad (278)$$

## 12. TIME and CHIPY\_ADJ:

For continuous-clocking mode observations, the value of `CHIPY_ADJ` is used to compute the `TIME`, pulse heights, and the coordinates `TDETX`, `TDETY`, `DETX`, and `DETY`.

(a) Calculate:

i. Timed exposure mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (279)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (280)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (281)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT}, \quad (282)$$

then

$$\text{TIME} = \text{TIME}_{\text{in}} \text{ and} \quad (283)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY}. \quad (284)$$

ii. Continuous-clocking mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (285)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (286)$$

then

A. Set

$$\text{CHIPY\_ADJ} = 512 \text{ and} \quad (287)$$

$$\text{TIME}' = \text{TIME\_RO} - (\text{CHIPY\_ADJ} + 1028) \times \text{TIMEDEL}. \quad (288)$$

B. If

$$\text{acaofffile} \neq \text{none} \text{ and} \quad (289)$$

$$\text{acaofffile} \neq \text{NONE}, \quad (290)$$

then

$$\text{CHIPY\_ADJ}' = \text{CHIPY\_TARG}_{\text{eff}} \text{ and} \quad (291)$$

$$\text{TIME}' = \text{TIME\_RO} - (\text{CHIPY\_ADJ}' + 1028) \times \text{TIMEDEL}, \quad (292)$$

and  $\text{CHIPY\_ADJ}$  is computed from the values of  $\text{RA\_TARG}$  and  $\text{DEC\_TARG}$  using the orientation of the telescope (i.e.  $\text{RA}$ ,  $\text{DEC}$ , and  $\text{ROLL}$ ) and the orientation of the SIM (i.e.  $\text{DY}$ ,  $\text{DZ}$ , and  $\text{DTHETA}$ ) at the time  $\text{TIME}'$ . At this step, the value of  $\text{CHIPY\_ADJ}$  can be negative.

C. If

$$\text{CONTENT} = \text{TGEVT1} \text{ and} \quad (293)$$

$$\text{TG\_M} > -99 \text{ and} \quad (294)$$

$$\text{TG\_M} < 99 \text{ and} \quad (295)$$

$$\text{CHIPY\_TG} \neq \text{NULL}, \quad (296)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TG}. \quad (297)$$

D. If

$$\text{CONTENT} = \text{TGEVT1} \quad (298)$$

and

$$\text{TG\_M} = -99 \text{ or} \quad (299)$$

$$\text{TG\_M} = 99, \quad (300)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (301)$$

E. If

$$\text{acaofffile} \neq \text{none} \text{ and} \quad (302)$$

$$\text{acaofffile} \neq \text{NONE} \quad (303)$$

and

$$\text{TIME}' < \text{TIME}_{\min} \text{ or} \quad (304)$$

$$\text{TIME}' \geq \text{TIME}_{\max}, \quad (305)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (306)$$

F. If

$$\text{acaofffile} \neq \text{none and} \quad (307)$$

$$\text{acaofffile} \neq \text{NONE} \quad (308)$$

and

$$\text{TIME}' < \text{TIME}_{\min} \text{ or} \quad (309)$$

$$\text{TIME}' \geq \text{TIME}_{\max}, \quad (310)$$

and

$$\text{CCD\_ID}_{\text{focus}} = 0 \text{ or} \quad (311)$$

$$\text{CCD\_ID}_{\text{focus}} = 2 \quad (312)$$

and

$$\text{CCD\_ID} = 0 \text{ or} \quad (313)$$

$$\text{CCD\_ID} = 2, \quad (314)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TARG}_{\text{acaoff,med}}. \quad (315)$$

G. If

$$\text{acaofffile} \neq \text{none and} \quad (316)$$

$$\text{acaofffile} \neq \text{NONE} \quad (317)$$

and

$$\text{TIME}' < \text{TIME}_{\min} \text{ or} \quad (318)$$

$$\text{TIME}' \geq \text{TIME}_{\max}, \quad (319)$$

and

$$\text{CCD\_ID}_{\text{focus}} = 1 \text{ or} \quad (320)$$

$$\text{CCD\_ID}_{\text{focus}} = 3 \quad (321)$$

and

$$\text{CCD\_ID} = 1 \text{ or} \quad (322)$$

$$\text{CCD\_ID} = 3, \quad (323)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TARG}_{\text{acaoff,med}}. \quad (324)$$



H. If

$$\text{acaofffile} \neq \text{none and} \quad (325)$$

$$\text{acaofffile} \neq \text{NONE} \quad (326)$$

and

$$\text{TIME}' < \text{TIME}_{\min} \text{ or} \quad (327)$$

$$\text{TIME}' \geq \text{TIME}_{\max}, \quad (328)$$

and

$$\text{CCD\_ID}_{\text{focus}} \geq 4 \text{ and} \quad (329)$$

$$\text{CCD\_ID} \geq 4, \quad (330)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TARG}_{\text{acaoff,med}}. \quad (331)$$

I. If

$$\text{acaofffile} = \text{none or} \quad (332)$$

$$\text{acaofffile} = \text{NONE} \quad (333)$$

and

$$\text{CONTENT} \neq \text{TGEVT1}, \quad (334)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (335)$$

J. If

$$\text{CCD\_ID}_{\text{focus}} \leq 3 \text{ and} \quad (336)$$

$$\text{CCD\_ID} \geq 4, \quad (337)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (338)$$

K. If

$$\text{CCD\_ID}_{\text{focus}} \geq 4 \text{ and} \quad (339)$$

$$\text{CCD\_ID} \leq 3, \quad (340)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (341)$$

L. If

$$\text{obs\_mode} = \text{secondary or} \quad (342)$$

$$\text{obs\_mode} = \text{SECONDARY}, \quad (343)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (344)$$

M. If

$$\text{CHIPY\_ADJ} < 0.5 \text{ or} \quad (345)$$

$$\text{CHIPY\_ADJ} \geq 1024.5 \quad (346)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (347)$$

N. Set

$$\text{TIME} = \text{TIME\_RO} - (\text{CHIPY\_ADJ} + 1028) \times \text{TIMEDEL}. \quad (348)$$

In continuous-clocking mode, the coordinate `CHIPY_ADJ` is used to compute the time, the pulse heights, and the coordinates (except for `X`, `Y`, and `SKY_1D`).

(b) Validation:

i. If

$$\text{TIME} < 0 \text{ or} \quad (349)$$

$$\text{TIME} \geq 3 \times 10^9, \quad (350)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

ii. If

$$\text{CHIPY\_ADJ} < 0.5 \text{ or} \quad (351)$$

$$\text{CHIPY\_ADJ} \geq 1024.5, \quad (352)$$

then `acis_process_events` exits with an error message because `CHIPY_ADJ`-dependent computations could fail if the value of `CHIPY_ADJ` is unphysical.

13. Bad pixel:

(a) If

$$\text{badpixfile} \neq \text{none} \text{ and} \quad (353)$$

$$\text{badpixfile} \neq \text{NONE} \quad (354)$$

and the `badpixfile` includes a valid HDU  $h_{\text{badpix}}$  where  $\text{CCD\_ID}_{\text{badpix}} = \text{CCD\_ID}$ , then the HDU  $h_{\text{badpix}}$  is searched as follows to determine if the event should have one or more `STATUS` bits set to one.

i. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more rows  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (355)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (356)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (357)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (358)$$

and

$$\text{STATUS}_{\text{badpix},r}[5] = 1 \text{ or} \quad (359)$$

$$\text{STATUS}_{\text{badpix},r}[6] = 1 \text{ or} \quad (360)$$

$$\text{STATUS}_{\text{badpix},r}[9] = 1, \quad (361)$$

then

$$\text{STATUS}[0] = 1 \quad (362)$$

for the event. Here  $\text{CCD\_ID}_{\text{badpix}}$  is the value of the keyword  $\text{CCD\_ID}$  in HDU  $h_{\text{badpix}}$  of the  $\text{badpixfile}$ ,  $\text{CHIPX}_{\text{badpix},r}[0]$  and  $\text{CHIPX}_{\text{badpix},r}[1]$  are the first and second values in the vector column named  $\text{CHIPX}$  of row  $r$  of HDU  $h_{\text{badpix}}$  of the  $\text{badpixfile}$ , and  $\text{TIME}_{\text{badpix},r}$  and  $\text{TIME\_STOP}_{\text{badpix},r}$  are the values in the columns named  $\text{TIME}$  and  $\text{TIME\_STOP}$ , respectively, of row  $r$  of HDU  $h_{\text{badpix}}$  of the  $\text{badpixfile}$ .

- ii. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more rows  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (363)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (364)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (365)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (366)$$

and

$$\text{STATUS}_{\text{badpix},r}[0] = 1 \text{ or} \quad (367)$$

$$\text{STATUS}_{\text{badpix},r}[1] = 1 \text{ or} \quad (368)$$

$$\text{STATUS}_{\text{badpix},r}[7] = 1 \text{ or} \quad (369)$$

$$\text{STATUS}_{\text{badpix},r}[11] = 1 \text{ or} \quad (370)$$

$$\text{STATUS}_{\text{badpix},r}[12] = 1 \text{ or} \quad (371)$$

$$\text{STATUS}_{\text{badpix},r}[13] = 1 \text{ or} \quad (372)$$

$$\text{STATUS}_{\text{badpix},r}[14] = 1 \text{ or} \quad (373)$$

$$\text{STATUS}_{\text{badpix},r}[16] = 1, \quad (374)$$

then

$$\text{STATUS}[4] = 1 \quad (375)$$

for the event.

- iii. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more rows  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (376)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (377)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (378)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (379)$$

and

$$\text{STATUS}_{\text{badpix},r}[8] = 1 \text{ or} \quad (380)$$

$$\text{STATUS}_{\text{badpix},r}[10] = 1, \quad (381)$$

then

$$\text{STATUS}[5] = 1 \quad (382)$$

for the event.

- iv. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more rows  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (383)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (384)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (385)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (386)$$

and

$$\text{STATUS}_{\text{badpix},r}[3] = 1, \quad (387)$$

then

$$\text{STATUS}[6] = 1 \quad (388)$$

for the event.

- v. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more rows  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (389)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (390)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (391)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (392)$$

and

$$\text{STATUS}_{\text{badpix},r}[2] = 1 \text{ or} \quad (393)$$

$$\text{STATUS}_{\text{badpix},r}[4] = 1, \quad (394)$$

then

$$\text{STATUS}[8] = 1 \quad (395)$$

for the event.

- vi. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more rows  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (396)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (397)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (398)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (399)$$

and

$$\text{STATUS}_{\text{badpix},r}[15] = 1, \quad (400)$$

then

$$\text{STATUS}[16] = 1 \quad (401)$$

for the event.

- vii. In summary, the mapping between a bad-pixel STATUS bit and the corresponding event STATUS bit is listed in Table 1.

#### 14. PHAS:

Table 1: Bad-pixel to event STATUS bit mapping

Bad-pixel STATUS bit	Event STATUS bit
0	4
1	4
2	8
3	6
4	8
5	0
6	0
7	4
8	5
9	0
10	5
11	4
12	4
13	4
14	4
15	16
16	4

- (a) If HDU 1 of the `infile` includes the column `PHAS`, then
  - i. the values of `PHAS` for an event are read from the `infile`.
  - ii. If `PHAS[4] < the split threshold`, then `STATUS[k] = 1` for bit  $k = 1$ .
  - iii. If `PHAS[4] ≤ PHAS[j]` for one or more  $j = 0-3$  or  $5-8$ , then `STATUS[k] = 1` for bit  $k = 1$ .
  - iv. If `PHAS[j] > 4095` for one or more  $j = 0-8$ , then `STATUS[k] = 1` for bit  $k = 2$ .

15. `PHAS_ADJ`:

- (a) If HDU 1 of the `infile` includes `DATAMODEin = CC33_FAINT` and the parameter `apply_cti = yes` and the `ctifile` and `mtlfile` are specified, then the CTI-adjusted pulse heights are computed as follows.
  - i. The real-valued arrays for the serial CTI adjustment  $\Delta_x$ , the parallel CTI adjustment  $\Delta_y$ , and the adjusted pulse heights `PHAS_ADJ` are initialized such that

$$\Delta_x[j] = 0, \tag{402}$$

$$\Delta_y[j] = 0, \text{ and} \tag{403}$$

$$\text{PHAS\_ADJ}[j] = \text{PHAS}[j] \tag{404}$$

for every element  $j = 0-8$ , where the starting point for the adjusted pulse heights are the unadjusted pulse heights `PHAS`. Note that the values of the unadjusted pulse heights `PHAS` remain unchanged to ensure that it is possible to remove the CTI adjustment or to reapply the adjustment if the algorithm or calibration data are modified.

- ii. The CTI iteration counter  $n$  is initialized such that

$$n = 1. \tag{405}$$

- iii. The temporary variables  $\Delta'_x$ ,  $\Delta'_y$ , and `PHAS_ADJ'` are set such that

$$\Delta'_x[j] = \Delta_x[j], \tag{406}$$

$$\Delta'_y[j] = \Delta_y[j], \text{ and} \tag{407}$$

$$\text{PHAS\_ADJ}'[j] = \text{PHAS\_ADJ}[j] \tag{408}$$

for each element  $j$ .

- iv. A. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID = 0` or `2`, then the values of  $\Delta_x$  are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0], \quad (409)$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[0]s_x\rho_x[0]V_x[0], \quad (410)$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2] - c'_x[1]s_x\rho_x[1]V_x[1], \quad (411)$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3], \quad (412)$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[3]s_x\rho_x[3]V_x[3], \quad (413)$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5] - c'_x[4]s_x\rho_x[4]V_x[4], \quad (414)$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6], \quad (415)$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[6]s_x\rho_x[6]V_x[6], \text{ and} \quad (416)$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8] - c'_x[7]s_x\rho_x[7]V_x[7], \quad (417)$$

where

$$c_x[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j\text{)}, \\ \text{FRCTRLX} & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 3, 6\text{)} \end{array} \right. \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{array} \right. \end{array} \right. \\ c'_x[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] < \text{split threshold or} \\ j \rightarrow \text{CHIPX} = 1, 256, 513, \text{ or } 768 \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \\ \text{FRCTRLX} & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{array} \right. \end{array} \right. \\ s_x = 1 + \text{TCTIX}(T - \text{FP\_TEMPO}), \quad (418) \end{cases}$$

$s_x$  is a temperature dependent scaling factor,  
TCTIX is the CCD\_ID dependent value in the column TCTIX of the  
`ctifile`,  
FP\_TEMPO is the name of a keyword in the `ctifile`,

$$T = \left( \frac{t' - t'_k}{t'_{k+1} - t'_k} \right) (\text{FP\_TEMP}_{k+1} - \text{FP\_TEMP}_k) + \text{FP\_TEMP}_k, \quad (419)$$

$\{ T$  is the time dependent focal plane temperature,

$$t' = t + \text{TIMEDEL}_{\text{in}}(\text{TIMEPIXR}_{\text{evt}} - 0.5), \quad (420)$$

$$t'_k = \begin{cases} t \text{ is the TIME of the event,} \\ \text{TIMEPIXR}_{\text{evt}} \text{ is a keyword in the infile,} \end{cases} \quad (421)$$

$$t'_k = \begin{cases} \text{TIME}_k \text{ is the } k^{\text{th}} \text{ element of the column TIME in the mtlfile,} \\ t'_k \leq t', \\ \text{If } t' < t'_k \text{ for } k = 0, \text{ then } k = 0, \\ \text{FP\_TEMP}_k \text{ is the } k^{\text{th}} \text{ element of the column FP\_TEMP in the mtlfile,} \\ \text{TIMEDEL}_{\text{mtl}} \text{ is a keyword in the mtlfile,} \\ \text{TIMEPIXR}_{\text{mtl}} \text{ is a keyword in the mtlfile,} \end{cases} \quad (422)$$

$$t'_{k+1} = \begin{cases} \text{TIME}_{k+1} \text{ is the } (k+1)^{\text{th}} \text{ element of the column TIME in the mtlfile,} \\ t'_{k+1} > t', \\ \text{If } t' > t'_k \text{ for } k = n, \text{ where } n \text{ is the last element, then } k = n, \\ \text{FP\_TEMP}_{k+1} \text{ is the } (k+1)^{\text{th}} \text{ element of the column FP\_TEMP in the} \\ \text{mtlfile,} \end{cases} \quad (423)$$

$$\rho_x[j] = \text{serial trap density,} \quad (423)$$

$$\left\{ \begin{array}{l} \rho_x[j] \text{ depends upon the CCD\_ID and upon the CHIPX and nint(CHIPY\_ADJ)} \\ \text{coordinates associated with element } j \text{ of PHAS\_ADJ}[j] \text{ (see Fig. 1),} \end{array} \right.$$

$$V_x[j] = \left( \frac{\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME\_X}_{l+1} - \text{VOLUME\_X}_l) + \text{VOLUME\_X}_l, \quad (424)$$

$$\left\{ \begin{array}{l} \text{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_l \text{ (and } \text{PHA}_{l+1}) \text{ are CCD\_ID dependent,} \\ \text{PHA}_l \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_l > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \text{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_{l+1} > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_{l+1} \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \text{element, then } l = n, \\ \text{VOLUME\_X}_l \text{ is the } l^{\text{th}} \text{ element of the column VOLUME\_X in the ctifile,} \\ \text{VOLUME\_X}_l, \text{ which is CCD\_ID dependent, is associated with } \text{PHA}_l, \\ \text{VOLUME\_X}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column VOLUME\_X in the} \\ \text{ctifile, and} \\ \text{VOLUME\_X}_{l+1}, \text{ which is CCD\_ID dependent, is associated with } \text{PHA}_{l+1} \end{array} \right.$$

B. If there is a serial CTI trap-density map in the ctifile for CCD\_ID and NODE\_ID = 1 or 3, then the values of  $\Delta_x$  are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0] - c'_x[1]s_x\rho_x[1]V_x[1], \quad (425)$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[2]s_x\rho_x[2]V_x[2], \quad (426)$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2], \quad (427)$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3] - c'_x[4]s_x\rho_x[4]V_x[4], \quad (428)$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[5]s_x\rho_x[5]V_x[5], \quad (429)$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5], \quad (430)$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6] - c'_x[7]s_x\rho_x[7]V_x[7], \quad (431)$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[8]s_x\rho_x[8]V_x[8], \text{ and} \quad (432)$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8], \quad (433)$$

where

$$\begin{aligned}
c_x[j] &= \left\{ \begin{array}{l} 0 \\ \text{FRCTRLX} \\ 1 \end{array} \right. \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 2, 5, 8) \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{array} \right. \\
c'_x[j] &= \left\{ \begin{array}{l} 0 \\ \text{FRCTRLX} \\ 1 \end{array} \right. \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] < \text{split threshold or} \\ j \rightarrow \text{CHIPX} = 257, 512, 769, \text{ or } 1024 \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \geq \text{split threshold} \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{array} \right.
\end{aligned}$$

and  $s_x$ ,  $T$ ,  $t'$ ,  $t'_k$ ,  $t'_{k+1}$ ,  $\rho_x[j]$ , and  $V_x[j]$  are given by equations. 418, 419, 420, 421, 422, 423, and 424, respectively.

- v. If there is a parallel CTI trap-density map in the `ctifile` for `CCD_ID`, then the values of  $\Delta_y$  are given by

$$\Delta_y[0] = c_y[0]s_y\rho_y[0]V_y[0], \quad (434)$$

$$\Delta_y[1] = c_y[1]s_y\rho_y[1]V_y[1], \quad (435)$$

$$\Delta_y[2] = c_y[2]s_y\rho_y[2]V_y[2], \quad (436)$$

$$\Delta_y[3] = c_y[3]s_y\rho_y[3]V_y[3] - c'_y[0]s_y\rho_y[0]V_y[0], \quad (437)$$

$$\Delta_y[4] = c_y[4]s_y\rho_y[4]V_y[4] - c'_y[1]s_y\rho_y[1]V_y[1], \quad (438)$$

$$\Delta_y[5] = c_y[5]s_y\rho_y[5]V_y[5] - c'_y[2]s_y\rho_y[2]V_y[2], \quad (439)$$

$$\Delta_y[6] = c_y[6]s_y\rho_y[6]V_y[6] - c'_y[3]s_y\rho_y[3]V_y[3], \quad (440)$$

$$\Delta_y[7] = c_y[7]s_y\rho_y[7]V_y[7] - c'_y[4]s_y\rho_y[4]V_y[4], \text{ and} \quad (441)$$

$$\Delta_y[8] = c_y[8]s_y\rho_y[8]V_y[8] - c'_y[5]s_y\rho_y[5]V_y[5], \quad (442)$$



where

$$\begin{aligned}
c_y[j] &= \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j), \\ \text{FRCTRLY} \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \text{(for } j = 3, 4, 5, 6, 7, 8), \end{array} \right. \\ \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2) \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \text{(for } j = 3, 4, 5, 6, 7, 8), \end{array} \right. \end{cases} \\ \\ c'_y[j] &= \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] < \text{split threshold or} \\ j \rightarrow \text{CHIPY} = 1 \text{ or } 1024 \\ \text{(for } j = 1, 2, 3, 4, 5), \\ \text{FRCTRLY} \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2, 3, 4, 5), \\ \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2, 3, 4, 5), \end{array} \right. \end{cases} \\ \\ s_y &= 1 + \text{TCTIY}(T - \text{FP\_TEMPO}), \end{cases} \tag{443}
\end{aligned}$$

$$\begin{aligned}
&\left\{ \begin{array}{l} s_y \text{ is a temperature dependent scaling factor,} \\ \text{TCTIY is the CCD\_ID dependent value in the column TCTIY of the} \\ \text{ctifile,} \\ \text{FP\_TEMPO is the name of a keyword in the ctifile,} \end{array} \right. \\
\rho_y[j] &= \text{parallel trap density,} \tag{444}
\end{aligned}$$

$$\begin{aligned}
&\left\{ \begin{array}{l} \rho_y[j] \text{ depends upon the CCD\_ID and upon the CHIPX and nint(CHIPY\_ADJ)} \\ \text{coordinates associated with element } j \text{ of PHAS\_ADJ}[j] \text{ (see Fig. 1),} \end{array} \right. \\
V_y[j] &= \left( \frac{\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME\_Y}_{l+1} - \text{VOLUME\_Y}_l) + \\
&\quad \text{VOLUME\_Y}_l, \tag{445}
\end{aligned}$$

$$\left\{ \begin{array}{l} \text{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_l \text{ (and } \text{PHA}_{l+1}) \text{ are CCD\_ID dependent,} \\ \text{PHA}_l \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_l > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \text{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_{l+1} > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_{l+1} \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \text{element, then } l = n, \\ \text{VOLUME\_Y}_l \text{ is the } l^{\text{th}} \text{ element of the column VOLUME\_Y in the ctifile,} \\ \text{VOLUME\_Y}_l, \text{ which is CCD\_ID dependent, is associated with } \text{PHA}_l, \\ \text{VOLUME\_Y}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column VOLUME\_Y in the} \\ \text{ctifile,} \\ \text{VOLUME\_Y}_{l+1}, \text{ which is CCD\_ID dependent, is associated with } \text{PHA}_{l+1}, \end{array} \right.$$

and  $T$ ,  $t'$ ,  $t'_k$ , and  $t'_{k+1}$ , are given by equations. 419, 420, 421, and 422, respectively.  
vi. The CTI-adjusted pulse heights

$$\text{PHAS\_ADJ}[j] = \text{PHAS}[j] + \Delta_x[j] + \Delta_y[j] \quad (446)$$

for all  $j$ .

vii. A. If

$$|\text{PHAS\_ADJ}'[j] - \text{PHAS\_ADJ}[j]| < \text{cticonverge} \text{ (for all } j \text{) and} \quad (447)$$

$$n \leq \text{max\_cti\_iter}, \quad (448)$$

then the computation of PHAS\_ADJ is complete for the event.

B. If

$$|\text{PHAS\_ADJ}'[j] - \text{PHAS\_ADJ}[j]| \geq \text{cticonverge} \text{ (for one or more } j \text{) and} \quad (449)$$

$$n < \text{max\_cti\_iter}, \quad (450)$$

then  $n = n + 1$  and steps 1.5.15(a)iii–1.5.15(a)vii are repeated.

C. If

$$|\text{PHAS\_ADJ}'[j] - \text{PHAS\_ADJ}[j]| \geq \text{cticonverge} \text{ (for one or more } j \text{) and} \quad (451)$$

$$n \geq \text{max\_cti\_iter}, \quad (452)$$

then no additional iterations are performed, the values of PHAS\_ADJ[ $j$ ] from the most recent iteration are used as are, and STATUS[ $k$ ] = 1 for bit  $k = 20$  to indicate that the CTI adjustment did not converge.

## 16. FLTGRADE:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ and} \quad (453)$$

$$\text{apply\_cti} = \text{yes}, \quad (454)$$

then

$$\text{FLTGRADE} = c_f[0] + 2c_f[1] + 4c_f[2] + 8c_f[3] + 16c_f[5] + 32c_f[6] + 64c_f[7] + 128c_f[8], \quad (455)$$

where

$$c_f[j] = \begin{cases} 0 & \text{if PHAS\_ADJ}[j] < \text{split threshold} \\ 1 & \text{otherwise,} \end{cases} \quad (456)$$

and the elements  $j = 0-3$  and  $5-8$  of PHAS\_ADJ are depicted in Figure 1.

(b) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ and} \quad (457)$$

$$\text{apply\_cti} = \text{no}, \quad (458)$$

then

$$\text{FLTGRADE} = c_f[0] + 2c_f[1] + 4c_f[2] + 8c_f[3] + 16c_f[5] + 32c_f[6] + 64c_f[7] + 128c_f[8], \quad (459)$$

where

$$c_f[j] = \begin{cases} 0 & \text{if PHAS}[j] < \text{split threshold} \\ 0 & \text{if PHAS}[j] > 4095 \\ 0 & \text{if PHAS}[j] > \text{PHAS}[4] \text{ for } j = 0-3 \\ 0 & \text{if PHAS}[j] \geq \text{PHAS}[4] \text{ for } j = 5-8 \\ 1 & \text{otherwise.} \end{cases} \quad (460)$$

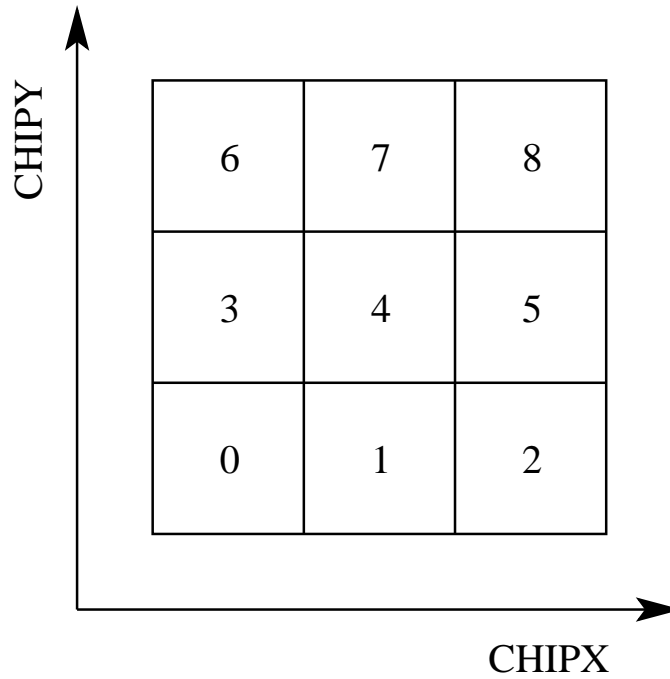


Figure 1: The relative CHIPX and CHIPY coordinates of the nine elements  $j = 0-8$  of a  $3 \text{ pixel} \times 3 \text{ pixel}$  event island PHAS[ $j$ ] or PHAS\_ADJ[ $j$ ].

(c) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (461)$$

then the FLTGRADE of an event is equal to the value of FLTGRADE for the event in the `infile`.

17. GRADE:

(a) If the `gradefile` is specified, then the GRADE of an event is determined from the FLTGRADE of the event as follows.

- i. The appropriate HDU of the `gradefile` is identified. This HDU is the one where the header keyword CBD10001 includes the  $\text{DATAMODE}_{\text{in}}$  of HDU 1 of the `infile`.
- ii. The row  $i$  of the appropriate HDU of the `gradefile` is identified. This row is the one where

$$\text{FLTGRADE}_{\text{grade},i} = \text{FLTGRADE}, \quad (462)$$

where  $\text{FLTGRADE}_{\text{grade}}$  is a column in the `gradefile`.

iii. The GRADE of the event is given by

$$\text{GRADE} = \text{GRADE}_{\text{grade},i}, \quad (463)$$

where  $\text{GRADE}_{\text{grade}}$  is a column in the `gradefile`.

18. PHA\_RO:

(a) Not GRADED:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (464)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (465)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (466)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT,} \quad (467)$$

then

i. Compute, if possible:

If

$$\text{doevtgrade} = \text{yes,} \quad (468)$$

then

$$\text{PHA\_RO} = \sum_{j=0}^8 \beta[j]p[j], \quad (469)$$

where

A.

$$p[j] = \text{PHAS}[j], \quad (470)$$

the pulse height that does not have cti- and time-dependent gain adjustments.

B. The elements  $j = 0-8$  of PHAS are depicted in Figure 1.

C.

$$\beta[j] = 0 \quad \text{if} \quad p[j] < \text{split threshold.} \quad (471)$$

D.

$$\beta[j] = 0 \quad \text{if} \quad \begin{cases} p[j] > p[4] & (\text{for } j = 0-3) \\ p[j] \geq p[4] & (\text{for } j = 5-8) \end{cases} \quad (472)$$

E. If CORNERS = -1, then

$$\beta[0] = \beta[2] = \beta[6] = \beta[8] = 0. \quad (473)$$

F. If CORNERS = 0, then there are no additional constraints on  $\beta[0]$ ,  $\beta[2]$ ,  $\beta[6]$ , and  $\beta[8]$ .

G. If CORNERS = 1, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{and} \quad \beta[3] = 0. \quad (474)$$

$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{and} \quad \beta[5] = 0. \quad (475)$$

$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \quad \text{and} \quad \beta[7] = 0. \quad (476)$$

$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \quad \text{and} \quad \beta[7] = 0. \quad (477)$$

H. If CORNERS = 2, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{or} \quad \beta[3] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (478)$$

$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{or} \quad \beta[5] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (479)$$

$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \quad \text{or} \quad \beta[7] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (480)$$

$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \quad \text{or} \quad \beta[7] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (481)$$

ii. Otherwise copy:

If

$$\text{doevtgrade} = \text{no} \quad (482)$$

and the `infile` includes the column PHA\_RO, then

$$\text{PHA\_RO} = \text{PHA\_RO}_{\text{in}}. \quad (483)$$

iii. Error:  
If

$$\text{doevtgrade} = \text{no} \quad (484)$$

and the `infile` does not include the column `PHA_RO`, then

$$\text{PHA\_RO} = \text{NULL}. \quad (485)$$

(b) GRADED:  
If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \text{ or} \quad (486)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED}, \quad (487)$$

then

i. Copy `PHA_RO`, if possible:

If the `infile` includes the column `PHA_RO`, then

$$\text{PHA\_RO} = \text{PHA\_RO}_{\text{in}}. \quad (488)$$

ii. Otherwise copy `PHA`:

If the `infile` does not include the column `PHA_RO` and

$$\text{TGAINCOR}_{\text{in}} = 0, \quad (489)$$

then

$$\text{PHA\_RO} = \text{PHA}_{\text{in}}. \quad (490)$$

iii. Error:

If the `infile` does not include the column `PHA_RO` and

$$\text{TGAINCOR}_{\text{in}} = 1, \quad (491)$$

then

$$\text{PHA\_RO} = \text{NULL}. \quad (492)$$

(c) Validation:

If `PHA_RO` is less than the split threshold, then

$$\text{PHA\_RO} = \text{NULL}. \quad (493)$$

19. `PHA`, including time-dependent gain:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}, \quad (494)$$

then

$$\text{PHA} = \sum_{j=0}^8 \beta[j]p[j], \quad (495)$$

where

i.

$$p[j] = \begin{cases} \text{PHAS\_ADJ}[j] & \text{if } \text{apply\_cti} = \text{yes} \\ \text{PHAS}[j] & \text{if } \text{apply\_cti} = \text{no} \end{cases} \quad (496)$$

- ii. The elements  $j = 0-8$  of PHAS\_ADJ (or PHAS) are depicted in Figure 1.  
iii.

$$\beta[j] = 0 \quad \text{if} \quad p[j] < \text{split threshold.} \quad (497)$$

- iv. If the CTI adjustment is not performed, then

$$\beta[j] = 0 \quad \text{if} \quad \begin{cases} p[j] > p[4] & (\text{for } j = 0-3) \\ p[j] \geq p[4] & (\text{for } j = 5-8) \end{cases} \quad (498)$$

- v. If CORNERS = -1, then

$$\beta[0] = \beta[2] = \beta[6] = \beta[8] = 0. \quad (499)$$

- vi. If CORNERS = 0, then there are no additional constraints on  $\beta[0]$ ,  $\beta[2]$ ,  $\beta[6]$ , and  $\beta[8]$ .  
vii. If CORNERS = 1, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{and} \quad \beta[3] = 0. \quad (500)$$

$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{and} \quad \beta[5] = 0. \quad (501)$$

$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \quad \text{and} \quad \beta[7] = 0. \quad (502)$$

$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \quad \text{and} \quad \beta[7] = 0. \quad (503)$$

- viii. If CORNERS = 2, then

$$\beta[0] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{or} \quad \beta[3] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (504)$$

$$\beta[2] = 0 \quad \text{if} \quad \beta[1] = 0 \quad \text{or} \quad \beta[5] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (505)$$

$$\beta[6] = 0 \quad \text{if} \quad \beta[3] = 0 \quad \text{or} \quad \beta[7] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (506)$$

$$\beta[8] = 0 \quad \text{if} \quad \beta[5] = 0 \quad \text{or} \quad \beta[7] = 0 \quad \text{or} \quad \text{GRADE} \neq 6. \quad (507)$$

- (b) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (508)$$

then the value of PHA for the event is read from the `infile`.

- (c) If

$$\text{apply\_tgain} = \text{yes}, \quad (509)$$

then

$$\text{PHA} = \text{PHA} - \text{int} \left[ \left( \frac{\text{TIME} - \text{EPOCH1}}{\text{EPOCH2} - \text{EPOCH1}} \right) (\delta_2 - \delta_1) + \delta_1 - \epsilon \right], \quad (510)$$

where

$$\text{int} = \text{the integer portion of (i.e. truncate or round down)}, \quad (511)$$

$$\text{TIME} = \text{the time of the event}, \quad (512)$$

$$\text{EPOCH1} = \text{a keyword in the } \text{tgainfile}, \quad (513)$$

$$\text{EPOCH2} = \text{a keyword in the } \text{tgainfile}, \quad (514)$$

$$\delta_1 = \left( \frac{\text{PHA} - \text{PHA}_m[r]}{\text{PHA}_{m+1}[r] - \text{PHA}_m[r]} \right) (\text{DELTPHA1}_{m+1}[r] - \text{DELTPHA1}_m[r]) + \quad (515)$$

$$\text{DELTPHA1}_m[r], \quad (516)$$

$$\left\{ \begin{array}{l}
r \text{ is the row of the } \mathbf{tgainfile} \text{ where} \\
\left\{ \begin{array}{l}
\text{CCD\_ID}[r] = \text{CCD\_ID}, \\
\text{CHIPX\_LO}[r] \leq \text{CHIPX}, \\
\text{CHIPX\_HI}[r] \geq \text{CHIPX}, \\
\text{CHIPY\_LO}[r] \leq \text{nint}(\text{CHIPY\_ADJ}), \text{ and} \\
\text{CHIPY\_HI}[r] \geq \text{nint}(\text{CHIPY\_ADJ}).
\end{array} \right. \\
m \text{ is the element of row } r \text{ where} \\
\left\{ \begin{array}{l}
\text{PHA}_m[r] \leq \text{PHA} \text{ and} \\
\text{PHA}_{m+1}[r] > \text{PHA}. \\
\text{If } \text{PHA} < \text{PHA}_m[r] \text{ for } m = 0, \text{ then } m = 0. \\
\text{If } \text{PHA} \geq \text{PHA}_m[r] \text{ for } m = M \text{ and } M \text{ is the last element of } \text{PHA}[r], \\
\text{then } m = M - 1.
\end{array} \right. \\
\text{The } \mathbf{tgainfile} \text{ includes a binary table with columns named} \\
\text{CCD\_ID, CHIPX\_LO, CHIPX\_HI, CHIPY\_LO, CHIPY\_HI, PHA, DELTPHA1, and} \\
\text{DELTPHA2.}
\end{array} \right. \quad (517)$$

$$\delta_2 = \left( \frac{\text{PHA} - \text{PHA}_m[r]}{\text{PHA}_{m+1}[r] - \text{PHA}_m[r]} \right) (\text{DELTPHA2}_{m+1}[r] - \text{DELTPHA2}_m[r]) + \quad (518)$$

$$\text{DELTPHA2}_m[r], \quad (519)$$

$$\epsilon = \text{is a uniform random deviate in the range } [0, 1), \quad (520)$$

$$\left\{ \begin{array}{l}
\text{If } \mathbf{rand\_pha} = \text{no}, \text{ then } \epsilon = 0.
\end{array} \right. \quad (521)$$

(d) If 
$$\text{PHA} \geq 32767, \quad (522)$$

then  $\text{STATUS}[k] = 1$  for bit  $k = 3$ .

#### 20. CORN\_PHA:

(a) If 
$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (523)$$

then the value of CORN\_PHA is read from the **infile**.

#### 21. ENERGY:

- (a) If the parameter **calculate\_pi** = yes and the parameter **gainfile** is specified and  $\text{PHA} > 0$ , then
- i. The row  $i$  in the **gainfile** is identified such that

$$\text{CCD\_ID} = \text{CCD\_ID}_{\text{gain},i}, \quad (524)$$

$$\text{CHIPX\_MIN}_{\text{gain},i} \leq \text{CHIPX} \leq \text{CHIPX\_MAX}_{\text{gain},i}, \quad \text{and} \quad (525)$$

$$\text{CHIPY\_MIN}_{\text{gain},i} \leq \text{nint}(\text{CHIPY\_ADJ}) \leq \text{CHIPY\_MAX}_{\text{gain},i}, \quad (526)$$

where  $\text{CCD\_ID}_{\text{gain}}$ ,  $\text{CHIPX\_MIN}_{\text{gain}}$ ,  $\text{CHIPX\_MAX}_{\text{gain}}$ ,  $\text{CHIPY\_MIN}_{\text{gain}}$ , and  $\text{CHIPY\_MAX}_{\text{gain}}$  are columns in the **gainfile**.

- ii. A uniform random deviate  $\Delta p$  is computed over the interval from  $[-0.5, +0.5)$ .
- iii. The element  $j$  of row  $i$  of  $\text{PHA}_{\text{gain}}$  is identified such that

$$\text{PHA}_{\text{gain},i}[j] \leq (\text{PHA} + \Delta p) < \text{PHA}_{\text{gain},i}[j + 1], \quad (527)$$

where  $\text{PHA}_{\text{gain}}$  is a vector column in the **gainfile**. If  $\text{PHA} + \Delta p < \text{PHA}_{\text{gain},i}[0]$ , then  $j = 0$ . If  $\text{PHA}_{\text{gain},i}[\text{NPOINTS} - 2] \leq \text{PHA} + \Delta p$ , then  $j = \text{NPOINTS} - 2$ , where **NPOINTS** is a column in the **gainfile**.

iv. The ENERGY of an event is computed from the PHA of the event:

$$\text{ENERGY} = \left( \frac{\text{PHA} + \Delta p - \text{PHA}_{\text{gain},i}[j]}{\text{PHA}_{\text{gain},i}[j+1] - \text{PHA}_{\text{gain},i}[j]} \right) (\text{ENERGY}_{\text{gain},i}[j+1] - \text{ENERGY}_{\text{gain},i}[j]) + \text{ENERGY}_{\text{gain},i}[j], \quad (528)$$

where  $\text{ENERGY}_{\text{gain}}$  is a vector column in the `gainfile`.

- v. If  $\text{ENERGY} < 0$ , then  $\text{ENERGY} = 0$ .
- (b) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and  $\text{PHA} \leq 0$ , then  $\text{ENERGY} = 0$ .
- (c) If the parameter `calculate_pi` = no or if the parameter `gainfile` is not specified, then
- i. If the `infile` includes the ENERGY of an event, then the ENERGY of the event is equal to the ENERGY in the `infile`.
  - ii. If the `infile` does not include the ENERGY of an event, then  $\text{ENERGY} = 0$ .

22. PI:

- (a) If 
$$\text{calculate\_pi} = \text{yes}, \quad (529)$$

then

i.

$$\text{PI} = \text{int} \left( \frac{\text{ENERGY}}{\text{pi\_bin\_width}} \right) + 1, \quad (530)$$

where “int” indicates the integer portion of what is in parentheses (i.e. the value is truncated or rounded down).

ii. If

$$\text{PI} < 1, \quad (531)$$

then  $\text{PI} = 1$ .

iii. If

$$\text{PI} > \text{pi\_num\_bins}, \quad (532)$$

then  $\text{PI} = \text{pi\_num\_bins}$ .

- (b) If 
$$\text{calculate\_pi} = \text{no} \quad (533)$$

and the `infile` includes the value of PI for an event, then the value of PI is read from the `infile`.

23. `pix_adj`:

(a) centroid:

i. If

$$\text{pix\_adj} = \text{centroid} \quad (534)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (535)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (536)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (537)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (538)$$



then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} - w'[0] + w'[2] - w'[3] + w'[5] - w'[6] + w'[8] \text{ and} \quad (539)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} - w'[0] - w'[1] - w'[2] + w'[6] + w'[7] + w'[8], \quad (540)$$

where

$$w'[j] = \frac{w[j]}{\sum_{j=0}^8 w[j]}, \quad (541)$$

$$w[j] = \begin{cases} p[j] & \text{if the pixel is valid} \\ 0 & \text{if the pixel is invalid,} \end{cases} \quad (542)$$

$$p[j] = \begin{cases} \text{PHAS\_ADJ}[j] & \text{if apply\_cti} = \text{yes} \\ \text{PHAS}[j] & \text{if apply\_cti} = \text{no,} \end{cases} \quad (543)$$

and the pixel is invalid if

$$\beta[j] = 0 \text{ or} \quad (544)$$

$$\text{STATUS}[0] = 1 \text{ or} \quad (545)$$

$$\text{STATUS}[1] = 1 \text{ or} \quad (546)$$

$$\text{STATUS}[2] = 1 \text{ or} \quad (547)$$

$$\text{STATUS}[3] = 1 \text{ or} \quad (548)$$

$$\text{STATUS}[4] = 1 \text{ or} \quad (549)$$

$$\text{STATUS}[11] = 1 \text{ or} \quad (550)$$

$$\text{STATUS}[13] = 1 \text{ or} \quad (551)$$

$$\text{STATUS}[14] = 1 \text{ or} \quad (552)$$

$$\text{STATUS}[15] = 1 \text{ or} \quad (553)$$

$$\text{STATUS}[16] = 1. \quad (554)$$

ii. If

$$\text{pix\_adj} = \text{centroid and} \quad (555)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}, \quad (556)$$

then

$$\text{TIME} = \text{TIME} + (w'[0] + w'[1] + w'[2] - w'[6] - w'[7] - w'[8]) \times \text{TIMEDEL}_{\text{in}}. \quad (557)$$

Note that it is possible for the centroid algorithm to yield adjustments to `CHIPX_ADJ` and/or `CHIPY_ADJ` that are greater than half a pixel. However, the adjustment cannot equal or exceed one pixel.

(b) edser:

i. If

$$\text{pix\_adj} = \text{edser} \quad (558)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (559)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED or} \quad (560)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (561)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (562)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (563)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (564)$$

then

A. If

$$\text{ENERGY} \neq \text{NaN and} \quad (565)$$

$$\text{ENERGY} > 0, \quad (566)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} + \left( \frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta X[k+1] - \Delta X[k]) + \Delta X[k] \quad (567)$$

and

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} + \left( \frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k] \quad (568)$$

where  $E[k]$  and  $E[k+1]$ ,  $\Delta X[k]$  and  $\Delta X[k+1]$ , and  $\Delta Y[k]$  and  $\Delta Y[k+1]$  are the  $k$  and  $(k+1)^{th}$  elements of the vector columns  $\text{ENERGY}_{\text{subpix}}$ ,  $\text{CHIPX\_OFFSET}_{\text{subpix}}$ , and  $\text{CHIPY\_OFFSET}_{\text{subpix}}$ , respectively. These columns are in the HDU of the `subpixfile` where the value of the keyword `CCD_ID` is equal to the value of the `CCD_ID` of the event. The appropriate row of these columns is the one where  $\text{FLTGRADE}_{\text{subpix}} = \text{FLTGRADE}$ . The values of  $k$  are the ones where

$$\text{ENERGY} \geq E[k] \text{ and} \quad (569)$$

$$\text{ENERGY} < E[k+1]. \quad (570)$$

Note that if

$$\text{ENERGY} \leq E[0], \quad (571)$$

then  $k = 0$ . Similarly, if

$$\text{ENERGY} \geq E[\text{NPOINTS}_{\text{subpix}} - 2], \quad (572)$$

then  $k = \text{NPOINTS}_{\text{subpix}} - 2$ .

B. If

$$\text{ENERGY} = \text{NaN or} \quad (573)$$

$$\text{ENERGY} \leq 0, \quad (574)$$

then the `CHIPX_ADJ` and `CHIPY_ADJ` coordinates are not modified.

ii. If

$$\text{pix\_adj} = \text{edser} \quad (575)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (576)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (577)$$

then

A. If

$$\text{ENERGY} \neq \text{NaN and} \quad (578)$$

$$\text{ENERGY} > 0, \quad (579)$$

then

$$\text{TIME} = \text{TIME} - \left( \left( \frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k] \right) \times \text{TIMEDEL} \quad (580)$$

B. If

$$\text{ENERGY} = \text{NaN or} \quad (581)$$

$$\text{ENERGY} \leq 0, \quad (582)$$

then the TIME is not modified.

(c) none:

If

$$\text{pix\_adj} = \text{none}, \quad (583)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ and} \quad (584)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ and} \quad (585)$$

$$\text{TIME} = \text{TIME.} \quad (586)$$

No sub-pixel adjustments are applied to the values of CHIPX\_ADJ and CHIPY\_ADJ (for timed exposure mode) or CHIPX\_ADJ and TIME (for continuous-clocking mode).

(d) randomize:

i. If

$$\text{pix\_adj} = \text{randomize}, \quad (587)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} + \epsilon_x \text{ and} \quad (588)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} + \epsilon_y, \quad (589)$$

where  $\epsilon_x$  and  $\epsilon_y$  are a uniform random deviates in the range  $[-0.5, +0.5)$  pixel.

ii. If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (590)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (591)$$

then

$$\text{TIME} = \text{TIME} - \epsilon_y \times \text{TIMEDEL}_{\text{in}}. \quad (592)$$

(e) If

$$\text{CHIPX\_ADJ} < 0.5, \quad (593)$$

then

$$\text{CHIPX\_ADJ} = 1. \quad (594)$$

(f) If

$$\text{CHIPX\_ADJ} \geq 1024.5, \quad (595)$$

then

$$\text{CHIPX\_ADJ} = 1024. \quad (596)$$

(g) If

$$\text{CHIPY\_ADJ} < 0.5, \quad (597)$$

then

$$\text{CHIPY\_ADJ} = 1. \quad (598)$$

(h) If

$$\text{CHIPY\_ADJ} \geq 1024.5, \quad (599)$$

then

$$\text{CHIPY\_ADJ} = 1024. \quad (600)$$

24. X and Y:

(a) If

$$\text{stop} = \text{sky}, \quad (601)$$

then

i. If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (602)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (603)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (604)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT}, \quad (605)$$

then the values of X and Y are computed using the real-valued coordinates `CHIPX_ADJ` and `CHIPY_ADJ` and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time `TIME`.

ii. If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (606)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (607)$$

then the values of X and Y are computed using the real-valued coordinates `CHIPX_ADJ` and `CHIPY_TARGeff` and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time `TIME`.

iii. If

$$\text{acaofffile} \neq \text{none} \text{ and} \quad (608)$$

$$\text{acaofffile} \neq \text{NONE} \quad (609)$$

and

$$\text{CONTENT} \neq \text{TGEVT1} \quad (610)$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \quad (611)$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \quad (612)$$

then

$$\text{X} = \text{NaN} \text{ and} \quad (613)$$

$$\text{Y} = \text{NaN}. \quad (614)$$

iv. If

$$\text{acaofffile} \neq \text{none and} \quad (615)$$

$$\text{acaofffile} \neq \text{NONE} \quad (616)$$

and

$$\text{CONTENT} = \text{TGEVT1 and} \quad (617)$$

$$\text{CHIPY\_TG} = \text{NULL}, \quad (618)$$

then

$$X = \text{NaN and} \quad (619)$$

$$Y = \text{NaN}. \quad (620)$$

25. SKY\_1D:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (621)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (622)$$

and

$$\text{stop} = \text{sky}, \quad (623)$$

then

i. The value of SKY\_1D is computed using the real-valued coordinates  $\text{CHIPX\_ADJ}$  and  $\text{CHIPY\_TARG}_{\text{eff}}$  and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

ii. If

$$\text{acaofffile} \neq \text{none and} \quad (624)$$

$$\text{acaofffile} \neq \text{NONE} \quad (625)$$

and

$$\text{CONTENT} \neq \text{TGEVT1} \quad (626)$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \quad (627)$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \quad (628)$$

then

$$\text{SKY\_1D} = \text{NaN}. \quad (629)$$

iii. If

$$\text{acaofffile} \neq \text{none and} \quad (630)$$

$$\text{acaofffile} \neq \text{NONE} \quad (631)$$

and

$$\text{CONTENT} = \text{TGEVT1 and} \quad (632)$$

$$\text{CHIPY\_TG} = \text{NULL}, \quad (633)$$

then

$$\text{SKY\_1D} = \text{NaN}. \quad (634)$$

26. DETX and DETY:

(a) If

$$\text{stop} = \text{det or} \tag{635}$$

$$\text{stop} = \text{tan or} \tag{636}$$

$$\text{stop} = \text{sky,} \tag{637}$$

then

- i. The values of DETX and DETY are computed using the real-valued coordinates CHIPX\_ADJ and CHIPY\_ADJ and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME.

ii. If

$$\text{acaofffile} \neq \text{none and} \tag{638}$$

$$\text{acaofffile} \neq \text{NONE} \tag{639}$$

and

$$\text{CONTENT} \neq \text{TGEVT1} \tag{640}$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \tag{641}$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \tag{642}$$

then

$$\text{DETX} = \text{NaN and} \tag{643}$$

$$\text{DETY} = \text{NaN.} \tag{644}$$

iii. If

$$\text{acaofffile} \neq \text{none and} \tag{645}$$

$$\text{acaofffile} \neq \text{NONE} \tag{646}$$

and

$$\text{CONTENT} = \text{TGEVT1 and} \tag{647}$$

$$\text{CHIPY\_TG} = \text{NULL,} \tag{648}$$

then

$$\text{DETX} = \text{NaN and} \tag{649}$$

$$\text{DETY} = \text{NaN.} \tag{650}$$

27. TDETX and TDETY:

(a) If

$$\text{stop} = \text{tdet or} \tag{651}$$

$$\text{stop} = \text{det or} \tag{652}$$

$$\text{stop} = \text{tan or} \tag{653}$$

$$\text{stop} = \text{sky} \tag{654}$$

then

i. The values of TDETX and TDETY are computed using the values of nint(CHIPX\_ADJ) and nint(CHIPY\_ADJ). Here, “nint” indicates that the real-valued coordinate is rounded to the nearest integer.

ii. If

$$\text{acaofffile} \neq \text{none and} \tag{655}$$

$$\text{acaofffile} \neq \text{NONE} \tag{656}$$

and

$$\text{CONTENT} \neq \text{TGEVT1} \tag{657}$$

and

$$\text{TIME} < \text{TIME}_{\min} \text{ or} \tag{658}$$

$$\text{TIME} \geq \text{TIME}_{\max}, \tag{659}$$

then

$$\text{TDETX} = \text{NULL and} \tag{660}$$

$$\text{TDETY} = \text{NULL.} \tag{661}$$

iii. If

$$\text{acaofffile} \neq \text{none and} \tag{662}$$

$$\text{acaofffile} \neq \text{NONE} \tag{663}$$

and

$$\text{CONTENT} = \text{TGEVT1 and} \tag{664}$$

$$\text{CHIPY\_TG} = \text{NULL,} \tag{665}$$

then

$$\text{TDETX} = \text{NULL and} \tag{666}$$

$$\text{TDETY} = \text{NULL.} \tag{667}$$

#### 1.5.4 Write outfile

1. PIX\_ADJ:

(a) If

$$\text{pix\_adj} = \text{centroid,} \tag{668}$$

then

$$\text{PIX\_ADJ} = \text{CENTROID.} \tag{669}$$

(b) If

$$\text{pix\_adj} = \text{edser,} \tag{670}$$

then

$$\text{PIX\_ADJ} = \text{EDSER.} \tag{671}$$

(c) If

$$\text{pix\_adj} = \text{none}, \quad (672)$$

then

$$\text{PIX\_ADJ} = \text{NONE}. \quad (673)$$

(d) If

$$\text{pix\_adj} = \text{randomize}, \quad (674)$$

then

$$\text{PIX\_ADJ} = \text{RANDOMIZE}. \quad (675)$$

2. RAND\_SKY:

(a) If

$$\text{pix\_adj} = \text{centroid}, \quad (676)$$

then

$$\text{RAND\_SKY} = 0.0. \quad (677)$$

(b) If

$$\text{pix\_adj} = \text{edser}, \quad (678)$$

then

$$\text{RAND\_SKY} = 0.0. \quad (679)$$

(c) If

$$\text{pix\_adj} = \text{none}, \quad (680)$$

then

$$\text{RAND\_SKY} = 0.0. \quad (681)$$

(d) If

$$\text{pix\_adj} = \text{randomize}, \quad (682)$$

then

$$\text{RAND\_SKY} = 0.5. \quad (683)$$

3. TIME\_ADJ:

(a) Timed-exposure mode:  
If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (684)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (685)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (686)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (687)$$

then

$$\text{TIME\_ADJ} = \text{NONE}. \quad (688)$$



(b) Continuous-clocking mode:

i. Set

`TIME_ADJ = MIDCHIP.` (689)

ii. If

`OBS_MODE = pointing or` (690)

`OBS_MODE = POINTING` (691)

and

`acaofffile ≠ none and` (692)

`acaofffile ≠ NONE,` (693)

then

`TIME_ADJ = TARGET.` (694)

iii. If

`OBS_MODE = pointing or` (695)

`OBS_MODE = POINTING` (696)

and

`CONTENTin = TGEVT1,` (697)

then

`TIME_ADJ = GRATING.` (698)

## 2 TBD

- Include all timed exposure mode processing.
- Add the graded mode cti adjustment.
- Should CONTENTs other than EVT0, EVT1, TGEVT1, and EVT2 be included?
- Should CONTENT = EVT2 be dropped?
- Should DATAMODEs other than CC33\_FAINT, CC33\_GRADED, FAINT, FAINT\_BIAS, GRADED, and VFAINT be included?
- Are the  $\beta$  in PHA\_R0 the same as the  $\beta$  in PHA?
- Should something be done about SKY\_1D?