**MIT Kavli Institute** **Chandra X-Ray Center**

**MEMORANDUM**
April 26, 2016

| | |
|---|---|
| **To:** | Jonathan McDowell, SDS Group Leader |
| **From:** | Glenn E. Allen, SDS |
| **Subject:** | `acis_process_events` spec |
| **Revision:** | 4.12 |
| **URL:** | http://space.mit.edu/CXC/docs/docs.html#ape |
| **File:** | /nfs/inconceivable/d0/sds/specs/acis_process_events/ape_spec_4.12.tex |

# 1 `acis_process_events`

This spec, which is incomplete, describes some of processing steps for continuous-clocking mode data.

## 1.1 Description

## 1.2 Input

## 1.3 Output

## 1.4 Parameters

## 1.5 Processing

### 1.5.1 Error checking

The following steps are performed once prior to the processing of the data for each input ACIS event.

1. `obsfile`:
   (a) Validation:
      i. If
      $$\texttt{obsfile} = \text{NONE}, \tag{1}$$
      then `obsfile` is changed to "none".
      ii. Existence:
      If
      $$\texttt{obsfile} \neq \text{none} \tag{2}$$
      and the `obsfile` does not exist, then `obsfile` is changed to "none" and `acis_process_events` produces a warning message.

iii. Permission:
If

$$\texttt{obsfile} \neq \text{none} \tag{3}$$

and the file permissions do not allow the `obsfile` to be read, then `obsfile` is changed to "none" and `acis_process_events` produces a warning message.

iv. `OBS_MODE`:
If

$$\texttt{obsfile} \neq \text{none} \tag{4}$$

then

A. If the `obsfile` does not include the keyword `OBS_MODE`, then $\texttt{OBS_MODE}_{\text{in}}$ is set to "none".

B. If the `obsfile` includes the keyword `OBS_MODE` then $\texttt{OBS_MODE}_{\text{in}}$ is set to `OBS_MODE`.

C. If

$$\texttt{OBS_MODE}_{\text{in}} = \text{POINTING}, \tag{5}$$

then $\texttt{OBS_MODE}_{\text{in}}$ is set to "pointing".

D. If

$$\texttt{OBS_MODE}_{\text{in}} = \text{SECONDARY}, \tag{6}$$

then $\texttt{OBS_MODE}_{\text{in}}$ is set to "secondary".

E. If

$$\texttt{OBS_MODE}_{\text{in}} \neq \text{none and} \tag{7}$$
$$\texttt{OBS_MODE}_{\text{in}} \neq \text{pointing and} \tag{8}$$
$$\texttt{OBS_MODE}_{\text{in}} \neq \text{secondary}, \tag{9}$$

then $\texttt{OBS_MODE}_{\text{in}}$ is set to "none" and `acis_process_events` produces a warning message.

2. `acaofffile`:

(a) Validation:
If

$$\texttt{OBS_MODE}_{\text{in}} = \text{pointing}, \tag{10}$$

then

i. If

$$\texttt{acaofffile} = \text{NONE}, \tag{11}$$

then `acaofffile` is set to "none."

ii. Setting:
If

$$\texttt{acaofffile} = \text{none}, \tag{12}$$

then `acis_process_events` produces a warning message.

iii. Existence:
If

$$\texttt{acaofffile} \neq \text{none} \tag{13}$$

and the `acaofffile` does not exist, then `acis_process_events` produces a warning and `acaofffile` is set to "none."

iv. Permission:
If the `acaofffile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

v. `CONTENT`:
If the `acaofffile` does not have an HDU $h_{\text{acaoff}}$ with the keyword

$$\texttt{CONTENT} = \text{ASPSOL or} \tag{14}$$

$$\texttt{CONTENT} = \text{OBCSOL,} \tag{15}$$

then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

vi. Keyword:
If HDU $h_{\text{acaoff}}$ of the `acaofffile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

vii. Columns:
If HDU $h_{\text{acaoff}}$ of the `acaofffile` does not include the columns `TIME`, `RA`, `DEC`, and `ROLL` then `acis_process_events` produces a warning message and `acaofffile` is set to "none." Hereafter, these columns are referred to as $\texttt{TIME}_{\text{acaoff}}$, $\texttt{RA}_{\text{acaoff}}$, $\texttt{DEC}_{\text{acaoff}}$, and $\texttt{ROLL}_{\text{acaoff}}$.

viii. Sequential:
If more than one valid `acaofffile` is specified and the the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `acaofffile` is set to "none."

3. `alignmentfile`:

(a) Validation:
If

$$\texttt{OBS_MODE}_{\text{in}} = \text{pointing,} \tag{16}$$

then

i. If

$$\texttt{alignmentfile} = \text{NONE,} \tag{17}$$

then `alignmentfile` is changed to "none."

ii. Setting:
If

$$\texttt{alignmentfile} = \text{none,} \tag{18}$$

then `acis_process_events` produces a warning message.

iii. Existence:
If

$$\texttt{alignmentfile} \neq \text{none} \tag{19}$$

and the `alignmentfile` does not exist, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

iv. Permission:
If the `alignmentfile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

v. `CONTENT`:
If the `alignmentfile` does not have an HDU $h_{\text{alignment}}$ with the keyword

$$\texttt{CONTENT} = \text{ASPSOL or} \tag{20}$$
$$\texttt{CONTENT} = \text{OBCSOL,} \tag{21}$$

then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

vi. Keyword:
If HDU $h_{\text{alignment}}$ of the `alignmentfile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

vii. Columns:
If HDU $h_{\text{alignment}}$ of the `alignmentfile` does not include the columns `DY`, `DZ`, and `DTHETA` then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

viii. Sequential:
If more than one valid `alignmentfile` is specified and the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `alignmentfile` is set to "none.".

4. `infile`:

(a) Existence:
If the `infile` does not exist, then `acis_process_events` exits with an error message.

(b) Permission:
If the `infile` exists and the file permissions do not allow it to be read, then `acis_process_events` exits with an error message.

(c) Validation:

i. `OBS_MODE`:
If $\texttt{OBS_MODE}_{\text{in}} = \text{none}$ and HDU $h_{\text{in}}$ of the `infile` includes the keyword `OBS_MODE`, then

A. $\texttt{OBS_MODE}_{\text{in}}$ is set to `OBS_MODE`.

B. If

$$\texttt{OBS_MODE}_{\text{in}} = \text{POINTING,} \tag{22}$$

then $\texttt{OBS_MODE}_{\text{in}}$ is set to "pointing".

C. If

$$\texttt{OBS_MODE}_{\text{in}} = \text{SECONDARY,} \tag{23}$$

then $\texttt{OBS_MODE}_{\text{in}}$ is set to "secondary".

D. If

$$\texttt{OBS_MODE}_{\text{in}} \neq \text{none and} \tag{24}$$
$$\texttt{OBS_MODE}_{\text{in}} \neq \text{pointing and} \tag{25}$$
$$\texttt{OBS_MODE}_{\text{in}} \neq \text{secondary,} \tag{26}$$

then $\texttt{OBS_MODE}_{\text{in}}$ is set to "none" and `acis_process_events` produces a warning message.

ii. DATAMODE:
The DATAMODE is read from the HDU $h_{\rm in}$ keyword of the same name. If the HDU $h_{\rm in}$ does not include the keyword DATAMODE or if

$$\begin{aligned}
\texttt{DATAMODE} &\neq \text{CC33_FAINT and} && (27)\\
\texttt{DATAMODE} &\neq \text{CC33_GRADED and} && (28)\\
\texttt{DATAMODE} &\neq \text{FAINT and} && (29)\\
\texttt{DATAMODE} &\neq \text{FAINT_BIAS and} && (30)\\
\texttt{DATAMODE} &\neq \text{GRADED and} && (31)\\
\texttt{DATAMODE} &\neq \text{VFAINT,} && (32)
\end{aligned}$$

then acis_process_events exits with an error message. Hereafter, the value of this keyword is referred to as $\texttt{DATAMODE}_{\rm in}$.

iii. CONTENT:
If the infile does not have an HDU $h_{\rm in}$ with the keyword

$$\begin{aligned}
\texttt{CONTENT} &= \text{EVT0 or} && (33)\\
\texttt{CONTENT} &= \text{EVT1 or} && (34)\\
\texttt{CONTENT} &= \text{TGEVT1 or} && (35)\\
\texttt{CONTENT} &= \text{EVT2,} && (36)
\end{aligned}$$

then acis_process_events exits with an error message. Hereafter, the value of this keyword is referred to as $\texttt{CONTENT}_{\rm in}$.

iv. TIME:
If

$$\begin{aligned}
\texttt{DATAMODE}_{\rm in} &= \text{CC33_FAINT or} && (37)\\
\texttt{DATAMODE}_{\rm in} &= \text{CC33_GRADED} && (38)
\end{aligned}$$

and HDU $h_{\rm in}$ of the infile does not include the column TIME, then acis_process_events exits with an error message. Hereafter, this column is referred to as $\texttt{TIME}_{\rm in}$.

v. TIME_RO:
If

$$\begin{aligned}
\texttt{DATAMODE}_{\rm in} &= \text{CC33_FAINT or} && (39)\\
\texttt{DATAMODE}_{\rm in} &= \text{CC33_GRADED} && (40)
\end{aligned}$$

and

$$\begin{aligned}
\texttt{CONTENT}_{\rm in} &= \text{EVT1 or} && (41)\\
\texttt{CONTENT}_{\rm in} &= \text{TGEVT1 or} && (42)\\
\texttt{CONTENT}_{\rm in} &= \text{EVT2} && (43)
\end{aligned}$$

and HDU $h_{\rm in}$ of the infile does not include the column TIME_RO, then acis_process_events exits with an error message. Hereafter, this column is referred to as $\texttt{TIME_RO}_{\rm in}$.

vi. CCD_ID:
A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \qquad (44)$$

and HDU $h_{\rm in}$ of the infile does not include the keyword CCD_ID, then acis_process_events exits with an error message. Hereafter, this keyword is referred to as $\texttt{CCD_ID}_{\rm in}$.

B. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{45}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{46}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{47}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CCD_ID}_{\rm in}$.

vii. `CCDX`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{48}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CCDX` and does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as $\texttt{CCDX}_{\rm in}$ and $\texttt{CHIPX}_{\rm in}$, respectively.

viii. `CHIPX`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{49}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{50}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{51}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CHIPX}_{\rm in}$.

ix. `CCDY`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{52}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{53}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{54}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED or} \tag{55}$$
$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT} \tag{56}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CCDY` and does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as $\texttt{CCDY}_{\rm in}$ and $\texttt{CHIPY}_{\rm in}$, respectively.

x. `TROW`:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT0} \tag{57}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{58}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{59}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `TROW` and does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as $\texttt{TROW}_{\rm in}$ and $\texttt{CHIPY}_{\rm in}$, respectively.

xi. CHIPY:

A. If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{60}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{61}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{62}$$

and HDU $h_{\rm in}$ of the `infile` does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as $\texttt{CHIPY}_{\rm in}$.

xii. TIMEDEL:

If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{63}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{64}$$

and HDU $h_{\rm in}$ of the `infile` does not include the keyword `TIMEDEL`, then `acis_process_events` exits with an error message. Hereafter this keyword is referred to as $\texttt{TIMEDEL}_{\rm in}$.

xiii. RA_TARG, DEC_TARG, RA_NOM, DEC_NOM, RA_PNT, DEC_PNT, CHIPY_TG, and TG_M:

If

$$\texttt{OBS_MODE}_{\rm in} = \text{pointing} \tag{65}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{66}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED,} \tag{67}$$

then

A. RA_TARG, DEC_TARG, RA_NOM, DEC_NOM, RA_PNT, DEC_PNT:

If HDU $h_{\rm in}$ of the `infile` does not include the keywords `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, and `DEC_PNT`, then `acis_process_events` exits with an error message. Hereafter these keywords are referred to as $\texttt{RA_TARG}_{\rm in}$, $\texttt{DEC_TARG}_{\rm in}$, $\texttt{RA_NOM}_{\rm in}$, $\texttt{DEC_NOM}_{\rm in}$, $\texttt{RA_PNT}_{\rm in}$, and $\texttt{DEC_PNT}_{\rm in}$, respectively.

B. CHIPY_TG and TG_M:

If

$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1} \tag{68}$$

and HDU $h_{\rm in}$ of the `infile` does not include the columns `CHIPY_TG`and `TG_M`, then `acis_process_events` exits with an error message. Hereafter these columns are referred to as $\texttt{CHIPY_TG}_{\rm in}$ and $\texttt{TG_M}_{\rm in}$, respectively.

xiv. TGAINCOR:

If HDU $h_{\rm in}$ of the `infile` does not include the keyword `TGAINCOR`, then this keyword is set to zero (i.e. FALSE). Hereafter, this keyword is referred to as $\texttt{TGAINCOR}_{\rm in}$.

5. stop:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:
If

$$\texttt{stop} \neq \text{none and} \tag{69}$$
$$\texttt{stop} \neq \text{chip and} \tag{70}$$
$$\texttt{stop} \neq \text{tdet and} \tag{71}$$
$$\texttt{stop} \neq \text{det and} \tag{72}$$
$$\texttt{stop} \neq \text{tan and} \tag{73}$$
$$\texttt{stop} \neq \text{sky,} \tag{74}$$

then `stop` is changed to "none" and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:
If

$$\texttt{OBS_MODE}_{\text{in}} \neq \text{pointing and} \tag{75}$$
$$\texttt{stop} \neq \text{none and} \tag{76}$$
$$\texttt{stop} \neq \text{chip and} \tag{77}$$
$$\texttt{stop} \neq \text{tdet,} \tag{78}$$

then `stop` is changed to "tdet" and `acis_process_events` produces a warning message.

iii. `acaofffile`:
If

$$\texttt{OBS_MODE}_{\text{in}} = \text{pointing and} \tag{79}$$
$$\texttt{acaofffile} = \text{none and} \tag{80}$$
$$\texttt{stop} \neq \text{none and} \tag{81}$$
$$\texttt{stop} \neq \text{chip and} \tag{82}$$
$$\texttt{stop} \neq \text{tdet,} \tag{83}$$

then `acis_process_events` produces a warning message and `stop` is changed to "none."

iv. `alignmentfile`:
If

$$\texttt{OBS_MODE}_{\text{in}} = \text{pointing and} \tag{84}$$
$$\texttt{alignmentfile} = \text{none and} \tag{85}$$
$$\texttt{stop} \neq \text{none and} \tag{86}$$
$$\texttt{stop} \neq \text{chip and} \tag{87}$$
$$\texttt{stop} \neq \text{tdet,} \tag{88}$$

then `acis_process_events` produces a warning message and `stop` is changed to "none."

6. `doevtgrade`:

(a) Lowercase:
The parameter string is converted to contain only lower case letters.

(b) Validation:
If

$$\texttt{doevtgrade} \neq \text{yes and} \tag{89}$$
$$\texttt{doevtgrade} \neq \text{no,} \tag{90}$$

then `acis_process_events` exits with an error message.

7. `apply_cti`:

   (a) Lowercase:
   The parameter string is converted to contain only lower case letters.

   (b) Validation:

      i. Setting:
      If

$$\texttt{apply_cti} \neq \text{yes and} \tag{91}$$
$$\texttt{apply_cti} \neq \text{no,} \tag{92}$$

      then `acis_process_events` exits with an error message.

      ii. `PHAS`:
      If

$$\texttt{apply_cti} = \text{yes} \tag{93}$$

      and the `infile` does not include the column `PHAS`, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

      iii. `doevtgrade`:
      If

$$\texttt{apply_cti} = \text{yes and} \tag{94}$$
$$\texttt{doevtgrade} = \text{no,} \tag{95}$$

      then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

8. `gradefile`:

   (a) Validation:

      i. If

$$\texttt{gradefile} = \text{NONE,} \tag{96}$$

      then `gradefile` is changed to "none."

      ii. Existence:
      If

$$\texttt{gradefile} \neq \text{none} \tag{97}$$

      and the `gradefile` does not exist, then `gradefile` is changed to "none" and `acis_process_events` produces a warning message.

      iii. Permission:
      If

$$\texttt{gradefile} \neq \text{none} \tag{98}$$

      and the file permissions do not allow it to be read, then `gradefile` is changed to "none" and `acis_process_events` produces a warning message.

      iv. HDU:
      If the `gradefile` does not have an HDU that includes the keyword `CBD10001` and where the keyword includes $\texttt{DATAMODE}_{\text{in}}$, then `gradefile` is changed to "none" and `acis_process_events` produces a warning message. Hereafter this HDU is referred to as $h_{\text{grade}}$.

v. Columns:
If

$$\texttt{gradefile} \neq \text{none} \tag{99}$$

and HDU $h_{\text{grade}}$ of the `gradefile` does not include the columns `FLTGRADE` and `GRADE`, then `gradefile` is changed to "none" and `acis_process_events` produces a warning message. Hereafter these columns are referred to as $\texttt{FLTGRADE}_{\text{grade}}$ and $\texttt{GRADE}_{\text{grade}}$, respectively.

9. `badpixfile`:

(a) Validation:

i. If

$$\texttt{badpixfile} = \text{NONE}, \tag{100}$$

then `badpixfile` is changed to "none."

ii. Existence:
If

$$\texttt{badpixfile} \neq \text{none} \tag{101}$$

and the `badpixfile` does not exist, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message.

iii. Permission:
If

$$\texttt{badpixfile} \neq \text{none} \tag{102}$$

and the file permissions do not allow it to be read, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message.

iv. `CONTENT`:
If

$$\texttt{badpixfile} \neq \text{none} \tag{103}$$

and the `badpixfile` does not have one or more HDUs $h_{\text{badpix}}$ with the keyword

$$\texttt{CONTENT} = \text{BADPIX or} \tag{104}$$
$$\texttt{CONTENT} = \text{CDB_ACIS_BADPIX}, \tag{105}$$

then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message.

v. Keyword:
If

$$\texttt{badpixfile} \neq \text{none} \tag{106}$$

and the HDU(s) $h_{\text{badpix}}$ of the `badpixfile` do not include the keyword `CCD_ID`, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message. Hereafter this keyword is referred to as $\texttt{CCD_ID}_{\text{badpix}}$.

vi. Columns:
If

$$\texttt{badpixfile} \neq \text{none} \tag{107}$$

and the HDU(s) $h_{\text{badpix}}$ of the `badpixfile` do not include the columns `CHIPX`, `CHIPY`, `TIME`, `TIME_STOP`, and `STATUS`, then `badpixfile` is changed to "none" and `acis_process_events` produces a warning message. Hereafter these columns are referred to as $\texttt{CHIPX}_{\text{badpix}}$, $\texttt{CHIPY}_{\text{badpix}}$, $\texttt{TIME}_{\text{badpix}}$, $\texttt{TIME_STOP}_{\text{badpix}}$, and $\texttt{STATUS}_{\text{badpix}}$, respectively.

10. `ctifile`:

(a) Validation:
If

$$\texttt{ctifile} \neq \text{caldb and} \tag{108}$$
$$\texttt{ctifile} \neq \text{CALDB}, \tag{109}$$

then

i. Existence:
If the `ctifile` does not exist, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

ii. Permission:
If the `ctifile` exists and the file permissions do not allow it to be read, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

iii. `CONTENT`:
If the `ctifile` does not have one or more HDUs $h_{\text{cti}}$ with the keyword

$$\texttt{CONTENT} = \text{CDB_ACIS_CTI}, \tag{110}$$

then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

iv. Columns:
If the first such HDU of the `ctifile` does not include the columns `CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `PHA`, `VOLUME_X`, `VOLUME_Y`, `FRCTRLX`, `FRCTRLY`, `TCTIX`, and `TCTIY`, then `apply_cti` is changed to "no" and `acis_process_events` produces a warning message.

11. `clobber`:

(a) Lowercase:
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:
If

$$\texttt{clobber} \neq \text{yes and} \tag{111}$$
$$\texttt{clobber} \neq \text{no}, \tag{112}$$

then `clobber` is changed to "no" and `acis_process_events` produces a warning message.

ii. Permission:
If

$$\texttt{clobber} = \text{yes} \tag{113}$$

and the `outfile` exists and the file permissions of the `outfile` do not allow it to be overwritten, then `acis_process_events` exits with an error message.

iii. Don't overwrite:
If

$$\texttt{clobber} = \text{no} \tag{114}$$

and the `outfile` exists, then `acis_process_events` exits with an error message.

12. `pix_adj`:

(a) Lowercase:
The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:
If

$$\texttt{pix_adj} \neq \text{centroid and} \tag{115}$$
$$\texttt{pix_adj} \neq \text{edser and} \tag{116}$$
$$\texttt{pix_adj} \neq \text{none and} \tag{117}$$
$$\texttt{pix_adj} \neq \text{randomize,} \tag{118}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:
If

$$\texttt{OBS_MODE}_{\text{in}} \neq \text{pointing and} \tag{119}$$
$$\texttt{pix_adj} \neq \text{none,} \tag{120}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iii. `acaofffile`:
If

$$\texttt{pix_adj} \neq \text{none} \tag{121}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{122}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{123}$$

and

$$\texttt{acaofffile} = \text{none,} \tag{124}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iv. `alignmentfile`:
If

$$\texttt{pix_adj} \neq \text{none} \tag{125}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{126}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{127}$$

and

$$\texttt{alignmentfile} = \text{none,} \tag{128}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

v. `stop`:
If

$$\texttt{pix_adj} = \text{centroid or} \tag{129}$$
$$\texttt{pix_adj} = \text{edser or} \tag{130}$$
$$\texttt{pix_adj} = \text{randomize} \tag{131}$$

and

$$\texttt{stop} \neq \text{sky}, \tag{132}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

vi. `PHAS`:
If

$$\texttt{pix_adj} = \text{centroid} \tag{133}$$

and the `infile` does not include the column `PHAS`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

vii. `FLTGRADE`:
If

$$\texttt{pix_adj} = \text{edser} \tag{134}$$

and

$$\texttt{DATAMODE} = \text{CC33_GRADED or} \tag{135}$$
$$\texttt{DATAMODE} = \text{GRADED} \tag{136}$$

and the `infile` does not include the column `FLTGRADE`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

13. `subpixfile`:

(a) If

$$\texttt{pix_adj} = \text{edser}, \tag{137}$$

then

i. Existence:
If the `subpixfile` does not exist, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

ii. Permission:
If the `subpixfile` exists and the file permissions do not allow it to be read, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iii. Validation:

A. `CONTENT`:
If the `subpixfile` does not have one or more HDUs $h_{\text{subpix}}$ with the keyword

$$\texttt{CONTENT} = \text{AXAF_SUBPIX}, \tag{138}$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

B. Keyword:
If the HDUs $h_{\mathrm{subpix}}$ of the `subpixfile` do not include the keyword `CCD_ID`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

C. Columns:
If the HDUs $h_{\mathrm{subpix}}$ of the `subpixfile` do not include binary tables with the columns `FLTGRADE`, `NPOINTS`, `ENERGY`, `CHIPX_OFFSET`, and `CHIPY_OFFSET`, then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message. Hereafter these columns are referred to as $\mathtt{FLTGRADE}_{\mathrm{subpix}}$, $\mathtt{NPOINTS}_{\mathrm{subpix}}$, $\mathtt{ENERGY}_{\mathrm{subpix}}$, $\mathtt{CHIPX_OFFSET}_{\mathrm{subpix}}$, and $\mathtt{CHIPY_OFFSET}_{\mathrm{subpix}}$, respectively.

### 1.5.2 Initializations

1. Focal-point CCD:
If

$$\mathtt{OBS_MODE}_{\mathrm{in}} = \text{pointing} \tag{139}$$

and

$$\mathtt{DATAMODE}_{\mathrm{in}} = \text{CC33_FAINT or} \tag{140}$$
$$\mathtt{DATAMODE}_{\mathrm{in}} = \text{CC33_GRADED,} \tag{141}$$

then the values of $\mathtt{RA_PNT}_{\mathrm{in}}$ and $\mathtt{DEC_PNT}_{\mathrm{in}}$ are used to determine the `CCD_ID` associated with the focal point. Hereafter this value is referred to as $\mathtt{CCD_ID}_{\mathrm{focus}}$.*

2. $\mathtt{TIME}_{\mathrm{min}}$ and $\mathtt{TIME}_{\mathrm{max}}$:
If

$$\mathtt{OBS_MODE}_{\mathrm{in}} = \text{pointing and} \tag{142}$$
$$\mathtt{acaofffile} \neq \text{none and} \tag{143}$$
$$\mathtt{alignmentfile} \neq \text{none,} \tag{144}$$

then the `acaofffile` data are processed to determine the earliest and latest times for which there is aspect information:

$$\mathtt{TIME}_{\mathrm{min}} = \min\left(\mathtt{TIME}_{\mathrm{acaoff}}\right) \text{ and} \tag{145}$$
$$\mathtt{TIME}_{\mathrm{max}} = \max\left(\mathtt{TIME}_{\mathrm{acaoff}}\right). \tag{146}$$

3. $\mathtt{CHIPX_TARG}_{\mathrm{acaoff,med}}$, $\mathtt{CHIPY_TARG}_{\mathrm{acaoff,med}}$:
If

$$\mathtt{OBS_MODE}_{\mathrm{in}} = \text{pointing} \tag{147}$$

and

$$\mathtt{DATAMODE}_{\mathrm{in}} = \text{CC33_FAINT or} \tag{148}$$
$$\mathtt{DATAMODE}_{\mathrm{in}} = \text{CC33_GRADED} \tag{149}$$

and

$$\mathtt{acaofffile} \neq \text{none and} \tag{150}$$
$$\mathtt{alignmentfile} \neq \text{none,} \tag{151}$$

*The focal point is the location associated with the optical axis in the absence of dither. This location should not be confused with the aim point, which is the location illuminated by an undithered point source provided that the source is not offset from the target location.

then the values of $\texttt{CHIPX_TARG}_{\rm acaoff}$ and $\texttt{CHIPY_TARG}_{\rm acaoff}$ are computed from the values of RA_TARG and DEC_TARG using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) and the TIMEs in the acaofffile. The values of $\texttt{CHIPX_TARG}_{\rm acaoff}$ and $\texttt{CHIPY_TARG}_{\rm acaoff}$ are processed to obtain the median values:

$$\texttt{CHIPX_TARG}_{\rm acaoff,med} = \text{median}(\texttt{CHIPX_TARG}_{\rm acaoff}) \text{ and} \tag{152}$$

$$\texttt{CHIPY_TARG}_{\rm acaoff,med} = \text{median}(\texttt{CHIPY_TARG}_{\rm acaoff}). \tag{153}$$

### 1.5.3 Loop over events

The following steps are performed, in sequence, for each event.

1. STATUS:
   (a) Exists:
   If HDU $h_{\rm in}$ of the infile includes a 32-bit column named STATUS, then
      i. The values of the bits for an event are read from the infile.
      ii. The value of STATUS[$k$] is set to zero for bits $k$ = 1–5, 14, 16–19, and 23 (of 0–31), bits that can be set by acis_process_events.
      iii. If

$$\texttt{doevtgrade} = \text{yes}, \tag{154}$$

      then the value of STATUS[20], the other bit that can be set by acis_process_events, is set to zero.

   (b) Does not exist:
   If HDU $h_{\rm in}$ does not include a 32-bit column named STATUS, then
      i. A set of 32 bits are allocated for the event.
      ii. The values of the 32 bits are initialized to zero.

2. EXPNO:
   (a) Read:
      i. If HDU $h_{\rm in}$ of the infile includes the EXPNO, hereafter referred to as $\texttt{EXPNO}_{\rm in}$, then

$$\texttt{EXPNO} = \texttt{EXPNO}_{\rm in}. \tag{155}$$

      ii. If HDU $h_{\rm in}$ of the infile does not include the EXPNO, then

$$\texttt{EXPNO} = \text{NULL}. \tag{156}$$

   (b) Validation:
   If

$$\texttt{EXPNO} \neq \text{NULL} \tag{157}$$

   and

$$\texttt{EXPNO} < 0 \text{ or} \tag{158}$$

$$\texttt{EXPNO} \geq 10^8, \tag{159}$$

   then acis_process_events produces a warning upon completion with a count of the total number of events for which equation 157 and either equation 158 or 159 is true. These conditions should not occur.

3. CCD_ID:

   (a) Read:
   The value of CCD_ID for an event is given by $\mathtt{CCD_ID}_{\rm in}$.

   (b) Validation:
   If

$$\mathtt{CCD_ID} < 0 \text{ or} \tag{160}$$
$$\mathtt{CCD_ID} > 9, \tag{161}$$

   then acis_process_events exits with an error message because CCD_ID-dependent computations could fail if the value of CCD_ID is unphysical.

4. CHIPX:

   (a) Read:

      i. If the infile includes the column CHIPX, then the value of CHIPX for an event is given by

$$\mathtt{CHIPX} = \mathtt{CHIPX}_{\rm in}. \tag{162}$$

      ii. If the infile does not include the column CHIPX, then the value of CHIPX for an event is given by

$$\mathtt{CHIPX} = \mathtt{CCDX}_{\rm in} + 1. \tag{163}$$

   (b) Validation:

      i. Unphysical:
      If

$$\mathtt{CHIPX} < 1 \text{ or} \tag{164}$$
$$\mathtt{CHIPX} > 1024, \tag{165}$$

      then acis_process_events exits with an error message because CHIPX-dependent computations could fail if the value of CHIPX is unphysical.

      ii. Unexpected:
      If

$$\mathtt{CHIPX} = 1 \text{ or} \tag{166}$$
$$\mathtt{CHIPX} = 1024, \tag{167}$$

      then acis_process_events produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

5. CHIPX_ADJ:

   (a) Initialize:

$$\mathtt{CHIPX_ADJ} = \mathtt{CHIPX}. \tag{168}$$

6. NODE_ID:

(a) Calculate:
The NODE_ID of an event is given by

$$\texttt{NODE_ID} = \text{int}\left(\frac{\texttt{CHIPX} - 1}{256}\right), \tag{169}$$

where "int" means the integer portion of (i.e. truncate or round down) the quantity in parentheses.

7. CHIPY:

(a) Read:

i. If the infile includes the column CHIPY, then the value of CHIPY for an event is given by

$$\texttt{CHIPY} = \texttt{CHIPY}_{\text{in}}. \tag{170}$$

ii. If the infile does not include the column CHIPY and

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \tag{171}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \tag{172}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{GRADED or} \tag{173}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT}, \tag{174}$$

then the value of CHIPY for an event is given by

$$\texttt{CHIPY} = \texttt{CCDY}_{\text{in}} + 1. \tag{175}$$

iii. If the infile does not include the column CHIPY and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{176}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{177}$$

then the value of CHIPY for an event is given by

$$\texttt{CHIPY} = \texttt{TROW}_{\text{in}} + 1. \tag{178}$$

(b) Validation:

i. Unphysical:

A. Timed-exposure mode:
If

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \tag{179}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \tag{180}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{GRADED or} \tag{181}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT} \tag{182}$$

and

$$\texttt{CHIPY} < 1 \text{ or} \tag{183}$$
$$\texttt{CHIPY} > 1024, \tag{184}$$

then acis_process_events exits with an error message because CHIPY-dependent computations could fail if the value of CHIPY is unphysical.

B. Continuous-clocking mode:
If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{185}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{186}$$

and

$$\texttt{CHIPY} < 1 \text{ or} \tag{187}$$
$$\texttt{CHIPY} > 512, \tag{188}$$

then `acis_process_events` exits with an error message because the `CHIPY` value is out of range and `CHIPY`-dependent computations could fail if the value of `CHIPY` is unphysical (especially if it is less than 1).

ii. Unexpected:

A. FAINT, FAINT_BIAS, or GRADED:
If

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{189}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{190}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED} \tag{191}$$

and

$$\texttt{CHIPY} = 1 \text{ or} \tag{192}$$
$$\texttt{CHIPY} = 1024, \tag{193}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

B. VFAINT:
If

$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT} \tag{194}$$

and

$$\texttt{CHIPY} = 1 \text{ or} \tag{195}$$
$$\texttt{CHIPY} = 2 \text{ or} \tag{196}$$
$$\texttt{CHIPY} = 1023 \text{ or} \tag{197}$$
$$\texttt{CHIPY} = 1024, \tag{198}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or another of these conditions is true. Although these values are not unphysical, they should not occur.

C. CC33_FAINT or CC33_GRADED:
If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{199}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{200}$$

and

$$\texttt{CHIPY} = 1 \text{ or} \tag{201}$$
$$\texttt{CHIPY} = 512, \tag{202}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. Although these values are not unphysical, they should not occur.

8. `TIME_RO`:

   (a) Timed exposure mode:
   If

$$\texttt{DATAMODE} = \text{FAINT or} \tag{203}$$
$$\texttt{DATAMODE} = \text{FAINT_BIAS or} \tag{204}$$
$$\texttt{DATAMODE} = \text{GRADED or} \tag{205}$$
$$\texttt{DATAMODE} = \text{VFAINT}, \tag{206}$$

   then

$$\texttt{TIME_RO} = \text{NaN}. \tag{207}$$

   (b) Continuous-clocking mode:
   If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{208}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{209}$$

   then

      i. Read:

         A. Level 0:
         If

$$\texttt{CONTENT}_{\text{in}} = \text{EVT0}, \tag{210}$$

         then the value of `TIME_RO` for an event is given by $\texttt{TIME}_{\text{in}}$.

         B. Level 1, 1.5, or 2:
         If

$$\texttt{CONTENT}_{\text{in}} = \text{EVT1 or} \tag{211}$$
$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 or} \tag{212}$$
$$\texttt{CONTENT}_{\text{in}} = \text{EVT2} \tag{213}$$

         and

$$\texttt{TIME_RO}_{\text{in}} > 0, \tag{214}$$

         then

$$\texttt{TIME_RO} = \texttt{TIME_RO}_{\text{in}}. \tag{215}$$

If

$$\texttt{CONTENT}_{\rm in} = \text{EVT1 or} \tag{216}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1 or} \tag{217}$$
$$\texttt{CONTENT}_{\rm in} = \text{EVT2} \tag{218}$$

and

$$\texttt{TIME_RO}_{\rm in} = 0, \tag{219}$$

then

$$\texttt{TIME_RO} = \texttt{TIME}_{\rm in}. \tag{220}$$

ii. Validation:
If

$$\texttt{TIME_RO} < 0 \text{ or} \tag{221}$$
$$\texttt{TIME_RO} \geq 3 \times 10^9, \tag{222}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which either equation 221 or 222 is true. These conditions should not occur.

9. $\texttt{CHIPX_TARG}_{\rm evt}$, $\texttt{CHIPY_TARG}_{\rm evt}$, and $\texttt{CHIPY_TARG}_{\rm eff}$:
The coordinate $\texttt{CHIPY_TARG}_{\rm eff}$ is used to compute the coordinates `X`, `Y`, and `SKY_1D`.

(a) Approximate:
If

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{223}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{224}$$

and

$$\texttt{acaofffile} \neq \text{none}, \tag{225}$$

then:

i. Initial values:
The values of $\texttt{CHIPX_TARG}_{\rm evt}$ and $\texttt{CHIPY_TARG}_{\rm evt}$ are computed from the values of `RA_TARG` and `DEC_TARG` using the value of $\texttt{CCD_ID}_{\rm focus}$ and using the orientation of the telescope (i.e. `RA`, `DEC`, and `ROLL`) and the orientation of the SIM (i.e. `DY`, `DZ`, and `DTHETA`) at the time given by $\texttt{TIME_RO} - (\texttt{CHIPY_TARG}_{\rm acaoff,med} + 1028) \times \texttt{TIMEDEL}$. The value of $\texttt{CHIPY_TARG}_{\rm evt}$ can be negative.

ii. ACIS-I0 or -I2:
If

$$\texttt{CCD_ID}_{\rm focus} = 0 \text{ or} \tag{226}$$
$$\texttt{CCD_ID}_{\rm focus} = 2, \tag{227}$$

then

A. If

$$\texttt{CCD_ID} = 0 \text{ or} \tag{228}$$
$$\texttt{CCD_ID} = 2, \tag{229}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = \texttt{CHIPY_TARG}_{\text{evt}}. \tag{230}$$

B. If

$$\texttt{CCD_ID} = 1 \text{ or} \tag{231}$$
$$\texttt{CCD_ID} = 3, \tag{232}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPY_TARG}_{\text{evt}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}}). \tag{233}$$

C. If

$$\texttt{CCD_ID} \geq 4, \tag{234}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{235}$$

iii. ACIS-I1 or -I3:
If

$$\texttt{CCD_ID}_{\text{focus}} = 1 \text{ or} \tag{236}$$
$$\texttt{CCD_ID}_{\text{focus}} = 3, \tag{237}$$

then

A. If

$$\texttt{CCD_ID} = 0 \text{ or} \tag{238}$$
$$\texttt{CCD_ID} = 2, \tag{239}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPY_TARG}_{\text{evt}} - \texttt{CHIPY_TARG}_{\text{acaoff,med}}). \tag{240}$$

B. If

$$\texttt{CCD_ID} = 1 \text{ or} \tag{241}$$
$$\texttt{CCD_ID} = 3, \tag{242}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = \texttt{CHIPY_TARG}_{\text{evt}}. \tag{243}$$

C. If

$$\texttt{CCD_ID} \geq 4, \tag{244}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 + (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{245}$$

iv. ACIS-S:
If

$$\texttt{CCD_ID}_{\text{focus}} \geq 4, \tag{246}$$

then

A. If

$$\texttt{CCD_ID} = 0 \text{ or} \tag{247}$$
$$\texttt{CCD_ID} = 2, \tag{248}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 + (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{249}$$

B. If

$$\texttt{CCD_ID} = 1 \text{ or} \tag{250}$$
$$\texttt{CCD_ID} = 3, \tag{251}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = 512 - (\texttt{CHIPX_TARG}_{\text{evt}} - \texttt{CHIPX_TARG}_{\text{acaoff,med}}). \tag{252}$$

C. If

$$\texttt{CCD_ID} \geq 4, \tag{253}$$

then

$$\texttt{CHIPY_TARG}_{\text{eff}} = \texttt{CHIPY_TARG}_{\text{evt}}. \tag{254}$$

(b) Validation:
If

$$\texttt{CHIPY_TARG}_{\text{eff}} < -256 \text{ or} \tag{255}$$
$$\texttt{CHIPY_TARG}_{\text{eff}} \geq 1280, \tag{256}$$

then `acis_process_events` produces a warning message.

10. `TG_M`:

(a) Continuous-clocking mode with gratings:
If

$$\texttt{OBS_MODE}_{\text{in}} = \text{pointing} \tag{257}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{258}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{259}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1}, \tag{260}$$

then

i. Read:
The value of TG_M for an event is given by $\texttt{TG_M}_{\rm in}$.

ii. Validation:

A. If

$$\texttt{TG_M} < -99, \tag{261}$$

then

$$\texttt{TG_M} = -99 \tag{262}$$

and acis_process_events produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

B. If

$$\texttt{TG_M} > 99, \tag{263}$$

then

$$\texttt{TG_M} = 99 \tag{264}$$

and acis_process_events produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

11. CHIPY_TG:

(a) Continuous-clocking mode with gratings:
If

$$\texttt{OBS_MODE}_{\rm in} = \text{pointing} \tag{265}$$

and

$$\texttt{DATAMODE}_{\rm in} = \text{CC33_FAINT or} \tag{266}$$
$$\texttt{DATAMODE}_{\rm in} = \text{CC33_GRADED} \tag{267}$$

and

$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1}, \tag{268}$$

then

i. Read:
The value of CHIPY_TG for an event is given by $\texttt{CHIPY_TG}_{\rm in}$.

ii. Validation:

A. If

$$\texttt{TG_M} > -99 \text{ and} \tag{269}$$
$$\texttt{TG_M} < 99 \text{ and} \tag{270}$$
$$\texttt{CHIPY_TG} \neq \text{NaN} \tag{271}$$

and

$$\texttt{CHIPY_TG} \leq 0 \text{ or} \tag{272}$$
$$\texttt{CHIPY_TG} \geq 1025, \tag{273}$$

then acis_process_events exits with an error message because CHIPY_TG-dependent computations could fail if the value of CHIPY_TG is unphysical.

B. If

$$\begin{aligned} \texttt{TG_M} &> -99 \text{ and} && (274)\\ \texttt{TG_M} &< 99 \text{ and} && (275)\\ \texttt{CHIPY_TG} &\neq \text{NaN and} && (276)\\ \texttt{CHIPY_TG} &< 1, && (277) \end{aligned}$$

then

$$\texttt{CHIPY_TG} = 1. \quad (278)$$

C. If

$$\begin{aligned} \texttt{TG_M} &> -99 \text{ and} && (279)\\ \texttt{TG_M} &< 99 \text{ and} && (280)\\ \texttt{CHIPY_TG} &\neq \text{NaN and} && (281)\\ \texttt{CHIPY_TG} &> 1024, && (282) \end{aligned}$$

then

$$\texttt{CHIPY_TG} = 1024. \quad (283)$$

12. TIME and CHIPY_ADJ:
For continuous-clocking mode observations, the value of CHIPY_ADJ is used to compute the TIME, pulse heights, and the coordinates TDETX, TDETY, DETX, and DETY.

(a) Calculate:

i. Timed exposure mode:
If

$$\begin{aligned} \texttt{DATAMODE}_{\text{in}} &= \text{FAINT or} && (284)\\ \texttt{DATAMODE}_{\text{in}} &= \text{FAINT_BIAS or} && (285)\\ \texttt{DATAMODE}_{\text{in}} &= \text{GRADED or} && (286)\\ \texttt{DATAMODE}_{\text{in}} &= \text{VFAINT}, && (287) \end{aligned}$$

then

$$\begin{aligned} \texttt{TIME} &= \texttt{TIME}_{\text{in}} \text{ and} && (288)\\ \texttt{CHIPY_ADJ} &= \texttt{CHIPY}. && (289) \end{aligned}$$

ii. Continuous-clocking mode:
If

$$\begin{aligned} \texttt{DATAMODE}_{\text{in}} &= \text{CC33_FAINT or} && (290)\\ \texttt{DATAMODE}_{\text{in}} &= \text{CC33_GRADED} && (291) \end{aligned}$$

then

A. Set

$$\begin{aligned} \texttt{CHIPY_ADJ} &= 512 \text{ and} && (292)\\ \texttt{TIME}' &= \texttt{TIME_RO} - (\texttt{CHIPY_ADJ} + 1028) \times \texttt{TIMEDEL}. && (293) \end{aligned}$$

B. If

$$\texttt{acaofffile} \neq \text{none}, \tag{294}$$

then

$$\texttt{CHIPY_ADJ}' = \texttt{CHIPY_TARG}_{\text{eff}} \text{ and} \tag{295}$$
$$\texttt{TIME}' = \texttt{TIME_RO} - (\texttt{CHIPY_ADJ}' + 1028) \times \texttt{TIMEDEL}, \tag{296}$$

and CHIPY_ADJ is computed from the values of RA_TARG and DEC_TARG using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME′. At this step, the value of CHIPY_ADJ can be negative.

C. If

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 and} \tag{297}$$
$$\texttt{TG_M} > -99 \text{ and} \tag{298}$$
$$\texttt{TG_M} < 99 \text{ and} \tag{299}$$
$$\texttt{CHIPY_TG} \neq \text{NaN}, \tag{300}$$

then

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_TG}. \tag{301}$$

D. If

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1} \tag{302}$$

and

$$\texttt{TG_M} = -99 \text{ or} \tag{303}$$
$$\texttt{TG_M} = 99, \tag{304}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{305}$$

E. If

$$\texttt{acaofffile} \neq \text{none} \tag{306}$$

and

$$\texttt{TIME}' < \texttt{TIME}_{\text{min}} \text{ or} \tag{307}$$
$$\texttt{TIME}' \geq \texttt{TIME}_{\text{max}}, \tag{308}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{309}$$

F. If

$$\texttt{acaofffile} \neq \text{none} \tag{310}$$

and

$$\texttt{TIME}' < \texttt{TIME}_{\text{min}} \text{ or} \tag{311}$$
$$\texttt{TIME}' \geq \texttt{TIME}_{\text{max}}, \tag{312}$$

and

$$\texttt{CCD_ID}_{\text{focus}} = 0 \text{ or} \tag{313}$$
$$\texttt{CCD_ID}_{\text{focus}} = 2 \tag{314}$$

and

$$\texttt{CCD_ID} = 0 \text{ or} \tag{315}$$
$$\texttt{CCD_ID} = 2, \tag{316}$$

then

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_TARG}_{\text{acaoff,med}}. \tag{317}$$

G. If

$$\texttt{acaofffile} \neq \text{none} \tag{318}$$

and

$$\texttt{TIME}' < \texttt{TIME}_{\text{min}} \text{ or} \tag{319}$$
$$\texttt{TIME}' \geq \texttt{TIME}_{\text{max}}, \tag{320}$$

and

$$\texttt{CCD_ID}_{\text{focus}} = 1 \text{ or} \tag{321}$$
$$\texttt{CCD_ID}_{\text{focus}} = 3 \tag{322}$$

and

$$\texttt{CCD_ID} = 1 \text{ or} \tag{323}$$
$$\texttt{CCD_ID} = 3, \tag{324}$$

then

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_TARG}_{\text{acaoff,med}}. \tag{325}$$

H. If

$$\texttt{acaofffile} \neq \text{none} \tag{326}$$

and

$$\texttt{TIME}' < \texttt{TIME}_{\text{min}} \text{ or} \tag{327}$$
$$\texttt{TIME}' \geq \texttt{TIME}_{\text{max}}, \tag{328}$$

and

$$\texttt{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \tag{329}$$
$$\texttt{CCD_ID} \geq 4, \tag{330}$$

then

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_TARG}_{\text{acaoff,med}}. \tag{331}$$

I. If

$$\texttt{acaofffile} = \text{none} \tag{332}$$

and

$$\texttt{CONTENT}_{\text{in}} \neq \text{TGEVT1}, \tag{333}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{334}$$

J. If

$$\texttt{CCD_ID}_{\text{focus}} \leq 3 \text{ and} \tag{335}$$
$$\texttt{CCD_ID} \geq 4, \tag{336}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{337}$$

K. If

$$\texttt{CCD_ID}_{\text{focus}} \geq 4 \text{ and} \tag{338}$$
$$\texttt{CCD_ID} \leq 3, \tag{339}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{340}$$

L. If

$$\texttt{OBS_MODE}_{\text{in}} = \text{secondary}, \tag{341}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{342}$$

M. If

$$\texttt{CHIPY_ADJ} < 0.5 \text{ or} \tag{343}$$
$$\texttt{CHIPY_ADJ} \geq 1024.5 \tag{344}$$

then

$$\texttt{CHIPY_ADJ} = 512. \tag{345}$$

N. Set

$$\texttt{TIME} = \texttt{TIME_RO} - (\texttt{CHIPY_ADJ} + 1028) \times \texttt{TIMEDEL}. \tag{346}$$

In continuous-clocking mode, the coordinate CHIPY_ADJ is used to compute the time, the pulse heights, and the coordinates (except for X, Y, and SKY_1D).

(b) Validation:

i. If

$$\texttt{TIME} < 0 \text{ or} \tag{347}$$
$$\texttt{TIME} \geq 3 \times 10^9, \tag{348}$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

ii. If

$$\texttt{CHIPY_ADJ} < 0.5 \text{ or} \tag{349}$$
$$\texttt{CHIPY_ADJ} \geq 1024.5, \tag{350}$$

then `acis_process_events` exits with an error message because `CHIPY_ADJ`-dependent computations could fail if the value of `CHIPY_ADJ` is unphysical.

13. Bad pixel:

(a) If

$$\texttt{badpixfile} \neq \text{none} \tag{351}$$

and the `badpixfile` includes a valid HDU $h_{\text{badpix}}$ where $\texttt{CCD_ID}_{\text{badpix}} = \texttt{CCD_ID}$, then the HDU $h_{\text{badpix}}$ is searched as follows to determine if the event should have one or more `STATUS` bits set to one.

i. If $\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows $r$ in HDU $h_{\text{badpix}}$ where

$$\texttt{CHIPX} \geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} \tag{352}$$
$$\texttt{CHIPX} \leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} \tag{353}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{badpix},r} \text{ and} \tag{354}$$
$$\texttt{TIME} < \texttt{TIME_STOP}_{\text{badpix},r} \tag{355}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[5] = 1 \text{ or} \tag{356}$$
$$\texttt{STATUS}_{\text{badpix},r}[6] = 1 \text{ or} \tag{357}$$
$$\texttt{STATUS}_{\text{badpix},r}[9] = 1, \tag{358}$$

then

$$\texttt{STATUS}[0] = 1 \tag{359}$$

for the event. Here $\texttt{CCD_ID}_{\text{badpix}}$ is the value of the keyword `CCD_ID` in HDU $h_{\text{badpix}}$ of the `badpixfile`, $\texttt{CHIPX}_{\text{badpix},r}[0]$ and $\texttt{CHIPX}_{\text{badpix},r}[1]$ are the first and second values in the vector column named `CHIPX` of row $r$ of HDU $h_{\text{badpix}}$ of the `badpixfile`, and $\texttt{TIME}_{\text{badpix},r}$ and $\texttt{TIME_STOP}_{\text{badpix},r}$ are the values in the columns named `TIME` and `TIME_STOP`, respectively, of row $r$ of HDU $h_{\text{badpix}}$ of the `badpixfile`.

ii. If $\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT}$ or $\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}$ and there are one or more rows $r$ in HDU $h_{\text{badpix}}$ where

$$\texttt{CHIPX} \geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} \tag{360}$$
$$\texttt{CHIPX} \leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} \tag{361}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{badpix},r} \text{ and} \tag{362}$$
$$\texttt{TIME} < \texttt{TIME_STOP}_{\text{badpix},r} \tag{363}$$

and

$$\begin{aligned}
\texttt{STATUS}_{\text{badpix},r}[0] &= 1 \text{ or} && (364)\\
\texttt{STATUS}_{\text{badpix},r}[1] &= 1 \text{ or} && (365)\\
\texttt{STATUS}_{\text{badpix},r}[7] &= 1 \text{ or} && (366)\\
\texttt{STATUS}_{\text{badpix},r}[11] &= 1 \text{ or} && (367)\\
\texttt{STATUS}_{\text{badpix},r}[12] &= 1 \text{ or} && (368)\\
\texttt{STATUS}_{\text{badpix},r}[13] &= 1 \text{ or} && (369)\\
\texttt{STATUS}_{\text{badpix},r}[14] &= 1 \text{ or} && (370)\\
\texttt{STATUS}_{\text{badpix},r}[16] &= 1, && (371)
\end{aligned}$$

then

$$\texttt{STATUS}[4] = 1 \tag{372}$$

for the event.

iii. If $\texttt{DATAMODE}_{\text{in}}$ = CC33_FAINT or $\texttt{DATAMODE}_{\text{in}}$ = CC33_GRADED and there are one or more rows $r$ in HDU $h_{\text{badpix}}$ where

$$\begin{aligned}
\texttt{CHIPX} &\geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} && (373)\\
\texttt{CHIPX} &\leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} && (374)\\
\texttt{TIME} &\geq \texttt{TIME}_{\text{badpix},r} \text{ and} && (375)\\
\texttt{TIME} &< \texttt{TIME_STOP}_{\text{badpix},r} && (376)
\end{aligned}$$

and

$$\begin{aligned}
\texttt{STATUS}_{\text{badpix},r}[8] &= 1 \text{ or} && (377)\\
\texttt{STATUS}_{\text{badpix},r}[10] &= 1, && (378)
\end{aligned}$$

then

$$\texttt{STATUS}[5] = 1 \tag{379}$$

for the event.

iv. If $\texttt{DATAMODE}_{\text{in}}$ = CC33_FAINT or $\texttt{DATAMODE}_{\text{in}}$ = CC33_GRADED and there are one or more rows $r$ in HDU $h_{\text{badpix}}$ where

$$\begin{aligned}
\texttt{CHIPX} &\geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} && (380)\\
\texttt{CHIPX} &\leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} && (381)\\
\texttt{TIME} &\geq \texttt{TIME}_{\text{badpix},r} \text{ and} && (382)\\
\texttt{TIME} &< \texttt{TIME_STOP}_{\text{badpix},r} && (383)
\end{aligned}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[3] = 1, \tag{384}$$

then

$$\texttt{STATUS}[6] = 1 \tag{385}$$

for the event.

v. If $\texttt{DATAMODE}_{\text{in}}$ = CC33_FAINT or $\texttt{DATAMODE}_{\text{in}}$ = CC33_GRADED and there are one or more rows $r$ in HDU $h_{\text{badpix}}$ where

$$\begin{aligned}
\texttt{CHIPX} &\geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} && (386)\\
\texttt{CHIPX} &\leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} && (387)\\
\texttt{TIME} &\geq \texttt{TIME}_{\text{badpix},r} \text{ and} && (388)\\
\texttt{TIME} &< \texttt{TIME_STOP}_{\text{badpix},r} && (389)
\end{aligned}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[2] = 1 \text{ or} \tag{390}$$
$$\texttt{STATUS}_{\text{badpix},r}[4] = 1, \tag{391}$$

then

$$\texttt{STATUS}[8] = 1 \tag{392}$$

for the event.

vi. If $\texttt{DATAMODE}_{\text{in}}$ = CC33_FAINT or $\texttt{DATAMODE}_{\text{in}}$ = CC33_GRADED and there are one or more rows $r$ in HDU $h_{\text{badpix}}$ where

$$\texttt{CHIPX} \geq \texttt{CHIPX}_{\text{badpix},r}[0] \text{ and} \tag{393}$$
$$\texttt{CHIPX} \leq \texttt{CHIPX}_{\text{badpix},r}[1] \text{ and} \tag{394}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{badpix},r} \text{ and} \tag{395}$$
$$\texttt{TIME} < \texttt{TIME_STOP}_{\text{badpix},r} \tag{396}$$

and

$$\texttt{STATUS}_{\text{badpix},r}[15] = 1, \tag{397}$$

then

$$\texttt{STATUS}[16] = 1 \tag{398}$$

for the event.

vii. In summary, the mapping between a bad-pixel `STATUS` bit and the corresponding event `STATUS` bit is listed in Table 1.

Table 1: Bad-pixel to event `STATUS` bit mapping

| Bad-pixel `STATUS` bit | Event `STATUS` bit |
|---|---|
| 0 | 4 |
| 1 | 4 |
| 2 | 8 |
| 3 | 6 |
| 4 | 8 |
| 5 | 0 |
| 6 | 0 |
| 7 | 4 |
| 8 | 5 |
| 9 | 0 |
| 10 | 5 |
| 11 | 4 |
| 12 | 4 |
| 13 | 4 |
| 14 | 4 |
| 15 | 16 |
| 16 | 4 |

14. `PHAS`:

(a) If HDU 1 of the `infile` includes the column `PHAS`, then

i. the values of PHAS for an event are read from the infile.

ii. If PHAS[4] < the split threshold, then STATUS[$k$] = 1 for bit $k = 1$.

iii. If PHAS[4] $\leq$ PHAS[$j$] for one or more $j = 0$–3 or 5–8, then STATUS[$k$] = 1 for bit $k = 1$.

iv. If PHAS[$j$] > 4095 for one or more $j = 0$–8, then STATUS[$k$] = 1 for bit $k = 2$.

15. FLTGRADE_RO:

(a) If HDU $h_{\rm in}$ of the infile includes the column PHAS and

$$\texttt{doevtgrade} = \text{yes}, \tag{399}$$

then

$$\texttt{FLTGRADE_RO} = c_{\rm fro}[0] + 2c_{\rm fro}[1] + 4c_{\rm fro}[2] + 8c_{\rm fro}[3] + \tag{400}$$
$$16c_{\rm fro}[5] + 32c_{\rm fro}[6] + 64c_{\rm fro}[7] + 128c_{\rm fro}[8]. \tag{401}$$

The values of $c_{\rm fro}[j]$ are determined as follows.

i. Each value of $c_{\rm fro}[j]$ is initialized such that

$$c_{\rm fro}[j] = 1. \tag{402}$$

ii. If

$$\texttt{PHAS}[j] < \text{split threshold or} \tag{403}$$
$$\texttt{PHAS}[j] > 4095, \tag{404}$$

then

$$c_{\rm fro}[j] = 0. \tag{405}$$

iii. If

$$j \geq 0 \text{ and} \tag{406}$$
$$j \leq 3 \text{ and} \tag{407}$$
$$\texttt{PHAS}[j] > \texttt{PHAS}[4], \tag{408}$$

then

$$c_{\rm fro}[j] = 0. \tag{409}$$

iv. If

$$j \geq 5 \text{ and} \tag{410}$$
$$j \leq 8 \text{ and} \tag{411}$$
$$\texttt{PHAS}[j] \geq \texttt{PHAS}[4], \tag{412}$$

then

$$c_{\rm fro}[j] = 0. \tag{413}$$

The elements $j = 0$–8 of PHAS are depicted in Figure 1.

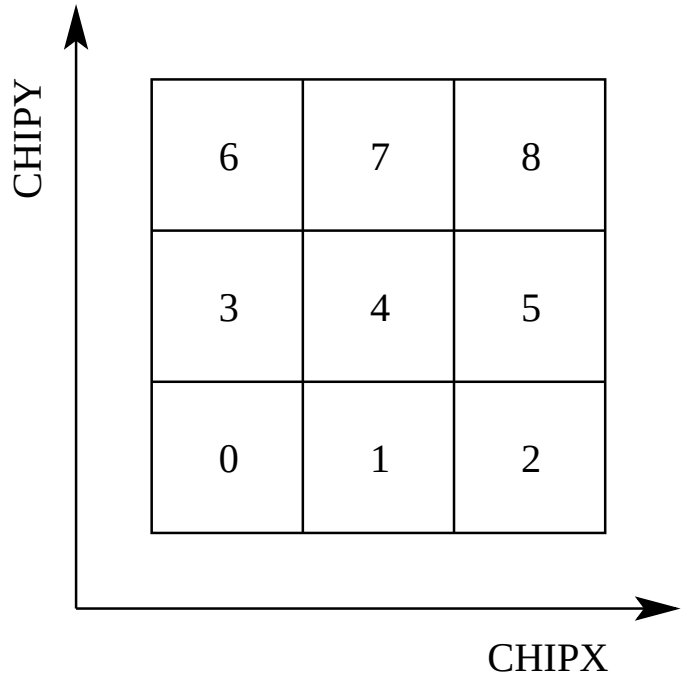


Figure 1: The relative CHIPX and CHIPY coordinates of the nine elements $j = 0$–$8$ of a 3 pixel × 3 pixel event island PHAS[$j$] or PHAS_ADJ[$j$].

(b) If HDU $h_{\rm in}$ of the infile does not include the column PHAS or

$$\texttt{doevtgrade} = \text{no}, \tag{414}$$

then

$$\texttt{FLTGRADE_RO} = \text{NULL}. \tag{415}$$

16. GRADE_RO:

(a) If

$$\texttt{FLTGRADE_RO} \neq \text{NULL and} \tag{416}$$
$$\texttt{gradefile} \neq \text{none and} \tag{417}$$

HDU $h_{\rm grade}$ of the gradefile has a row $r$, where

$$\texttt{FLTGRADE}_{\rm grade}[r] = \texttt{FLTGRADE_RO}, \tag{418}$$

then

$$\texttt{GRADE_RO} = \texttt{GRADE}_{\rm grade}[r]. \tag{419}$$

(b) If

$$\texttt{FLTGRADE_RO} = \text{NULL or} \tag{420}$$
$$\texttt{gradefile} = \text{none or} \tag{421}$$

HDU $h_{\mathrm{grade}}$ of the `gradefile` does not have a row $r$, where

$$\texttt{FLTGRADE}_{\mathrm{grade}}[r] = \texttt{FLTGRADE_RO}, \tag{422}$$

then

$$\texttt{GRADE_RO} = \mathrm{NULL}. \tag{423}$$

17. `PHA_RO`:

(a) If HDU $h_{\mathrm{in}}$ of the `infile` includes the column `PHAS` and

$$\texttt{doevtgrade} = \text{yes and} \tag{424}$$
$$\texttt{GRADE_RO} \neq \mathrm{NULL}, \tag{425}$$

then

$$\texttt{PHA_RO} = \sum_{j=0}^{8} c_{\mathrm{pro}}[j]\texttt{PHAS}[j]. \tag{426}$$

The values of $c_{\mathrm{pro}}[j]$ are determined as follows.

i. Each value of $c_{\mathrm{pro}}[j]$ is initialized such that

$$c_{\mathrm{pro}}[j] = 1. \tag{427}$$

ii. If

$$\texttt{PHAS}[j] < \text{split threshold}, \tag{428}$$

then

$$c_{\mathrm{pro}}[j] = 0. \tag{429}$$

iii. If

$$j \geq 0 \text{ and} \tag{430}$$
$$j \leq 3 \text{ and} \tag{431}$$
$$\texttt{PHAS}[j] > \texttt{PHAS}[4], \tag{432}$$

then

$$c_{\mathrm{pro}}[j] = 0. \tag{433}$$

iv. If

$$j \geq 5 \text{ and} \tag{434}$$
$$j \leq 8 \text{ and} \tag{435}$$
$$\texttt{PHAS}[j] \geq \texttt{PHAS}[4], \tag{436}$$

then

$$c_{\mathrm{pro}}[j] = 0. \tag{437}$$

v. If

$$\texttt{CORNERS} = -1, \tag{438}$$

then

$$c_{\text{pro}}[0] = 0 \text{ and} \tag{439}$$
$$c_{\text{pro}}[2] = 0 \text{ and} \tag{440}$$
$$c_{\text{pro}}[6] = 0 \text{ and} \tag{441}$$
$$c_{\text{pro}}[8] = 0. \tag{442}$$

vi. If

$$\texttt{CORNERS} = 0, \tag{443}$$

then there are no additional constraints on $c_{\text{pro}}[0]$, $c_{\text{pro}}[2]$, $c_{\text{pro}}[6]$, and $c_{\text{pro}}[8]$.

vii. If

$$\texttt{CORNERS} = 1, \tag{444}$$

then

A. If

$$c_{\text{pro}}[1] = 0 \text{ and} \tag{445}$$
$$c_{\text{pro}}[3] = 0, \tag{446}$$

then

$$c_{\text{pro}}[0] = 0. \tag{447}$$

B. If

$$c_{\text{pro}}[1] = 0 \text{ and} \tag{448}$$
$$c_{\text{pro}}[5] = 0, \tag{449}$$

then

$$c_{\text{pro}}[2] = 0. \tag{450}$$

C. If

$$c_{\text{pro}}[3] = 0 \text{ and} \tag{451}$$
$$c_{\text{pro}}[7] = 0, \tag{452}$$

then

$$c_{\text{pro}}[6] = 0. \tag{453}$$

D. If

$$c_{\text{pro}}[5] = 0 \text{ and} \tag{454}$$
$$c_{\text{pro}}[7] = 0, \tag{455}$$

then

$$c_{\text{pro}}[8] = 0. \tag{456}$$

viii. If

$$\texttt{CORNERS} = 2, \tag{457}$$

then

A. If

$$c_{\rm pro}[1] = 0 \text{ or} \tag{458}$$
$$c_{\rm pro}[3] = 0 \text{ or} \tag{459}$$
$$\texttt{GRADE_RO} \neq 6, \tag{460}$$

then

$$c_{\rm pro}[0] = 0. \tag{461}$$

B. If

$$c_{\rm pro}[1] = 0 \text{ or} \tag{462}$$
$$c_{\rm pro}[5] = 0 \text{ or} \tag{463}$$
$$\texttt{GRADE_RO} \neq 6, \tag{464}$$

then

$$c_{\rm pro}[2] = 0. \tag{465}$$

C. If

$$c_{\rm pro}[3] = 0 \text{ or} \tag{466}$$
$$c_{\rm pro}[7] = 0 \text{ or} \tag{467}$$
$$\texttt{GRADE_RO} \neq 6, \tag{468}$$

then

$$c_{\rm pro}[6] = 0. \tag{469}$$

D. If

$$c_{\rm pro}[5] = 0 \text{ or} \tag{470}$$
$$c_{\rm pro}[7] = 0 \text{ or} \tag{471}$$
$$\texttt{GRADE_RO} \neq 6, \tag{472}$$

then

$$c_{\rm pro}[8] = 0. \tag{473}$$

The elements $j = 0$–$8$ of `PHAS` are depicted in Figure 1.

(b) If HDU $h_{\rm in}$ of the `infile` does not include the column `PHAS` or

$$\texttt{doevtgrade} = \text{no or} \tag{474}$$
$$\texttt{GRADE_RO} = \text{NULL}, \tag{475}$$

then

i. If HDU $h_{\rm in}$ of the `infile` includes the column `PHA_RO`, then

$$\texttt{PHA_RO} = \texttt{PHA_RO}_{\rm in}. \tag{476}$$

ii. If HDU $h_{\rm in}$ of the `infile` does not include the column `PHA_RO`, then

A. If HDU $h_{\rm in}$ of the `infile` includes the column `PHA` and HDU $h_{\rm in}$ of the `infile` includes the keyword `TGAINCOR` and

$$\texttt{TGAINCOR} = 0, \tag{477}$$

then

$$\texttt{PHA_RO} = \texttt{PHA}_{\rm in}. \tag{478}$$

B. If HDU $h_{\rm in}$ of the `infile` includes the column `PHA` and HDU $h_{\rm in}$ of the `infile` includes the keyword `TGAINCOR` and

$$\texttt{TGAINCOR} \neq 0, \tag{479}$$

then

$$\texttt{PHA_RO} = \text{NULL}. \tag{480}$$

C. If HDU $h_{\rm in}$ of the `infile` includes the column `PHA` and HDU $h_{\rm in}$ of the `infile` does not include the keyword `TGAINCOR` then

$$\texttt{PHA_RO} = \texttt{PHA}_{\rm in}. \tag{481}$$

D. If HDU $h_{\rm in}$ of the `infile` does not include the column `PHA`, then

$$\texttt{PHA_RO} = \text{NULL}. \tag{482}$$

18. `PHAS_ADJ`:

(a) If HDU 1 of the `infile` includes $\texttt{DATAMODE}_{\rm in}$ = CC33_FAINT and the parameter `apply_cti` = yes and the `ctifile` and `mtlfile` are specified, then the CTI-adjusted pulse heights are computed as follows.

i. The real-valued arrays for the serial CTI adjustment $\Delta_x$, the parallel CTI adjustment $\Delta_y$, and the adjusted pulse heights `PHAS_ADJ` are initialized such that

$$\Delta_x[j] = 0, \tag{483}$$
$$\Delta_y[j] = 0, \text{ and} \tag{484}$$
$$\texttt{PHAS_ADJ}[j] = \texttt{PHAS}[j] \tag{485}$$

for every element $j$ = 0–8, where the starting point for the adjusted pulse heights are the unadjusted pulse heights `PHAS`. Note that the values of the unadjusted pulse heights `PHAS` remain unchanged to ensure that it is possible to remove the CTI adjustment or to reapply the adjustment if the algorithm or calibration data are modified.

ii. The CTI iteration counter $n$ is initialized such that

$$n = 1. \tag{486}$$

iii. The temporary variables $\Delta'_x$, $\Delta'_y$, and $\texttt{PHAS_ADJ}'$ are set such that

$$\Delta'_x[j] = \Delta_x[j], \tag{487}$$
$$\Delta'_y[j] = \Delta_y[j], \text{ and} \tag{488}$$
$$\texttt{PHAS_ADJ}'[j] = \texttt{PHAS_ADJ}[j] \tag{489}$$

for each element $j$.

iv. A. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID` = 0 or 2, then the values of $\Delta_x$ are given by

$$\begin{aligned}
\Delta_x[0] &= c_x[0]s_x\rho_x[0]V_x[0], && (490)\\
\Delta_x[1] &= c_x[1]s_x\rho_x[1]V_x[1] - c'_x[0]s_x\rho_x[0]V_x[0], && (491)\\
\Delta_x[2] &= c_x[2]s_x\rho_x[2]V_x[2] - c'_x[1]s_x\rho_x[1]V_x[1], && (492)\\
\Delta_x[3] &= c_x[3]s_x\rho_x[3]V_x[3], && (493)\\
\Delta_x[4] &= c_x[4]s_x\rho_x[4]V_x[4] - c'_x[3]s_x\rho_x[3]V_x[3], && (494)\\
\Delta_x[5] &= c_x[5]s_x\rho_x[5]V_x[5] - c'_x[4]s_x\rho_x[4]V_x[4], && (495)\\
\Delta_x[6] &= c_x[6]s_x\rho_x[6]V_x[6], && (496)\\
\Delta_x[7] &= c_x[7]s_x\rho_x[7]V_x[7] - c'_x[6]s_x\rho_x[6]V_x[6], \text{ and} && (497)\\
\Delta_x[8] &= c_x[8]s_x\rho_x[8]V_x[8] - c'_x[7]s_x\rho_x[7]V_x[7], && (498)
\end{aligned}$$

where

$$c_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold} \\ \quad \text{(for all } j\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \quad \text{(for } j = 1,2,4,5,7,8\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,3,6\text{)} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \quad \text{(for } j = 1,2,4,5,7,8\text{)}, \end{cases} \end{cases}$$

$$c'_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold or} \\ \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] < \text{ split threshold or} \\ j \rightarrow \texttt{CHIPX} = 1, 256, 513, \text{ or } 768 \\ \quad \text{(for } j = 0,1,3,4,6,7\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,3,4,6,7\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,3,4,6,7\text{)}, \end{cases} \end{cases}$$

$$s_x = 1 + \texttt{TCTIX}\,(T - \texttt{FP_TEMPO})\,, \qquad (499)$$

$$\begin{cases} s_x \text{ is a temperature dependent scaling factor,} \\ \texttt{TCTIX} \text{ is the } \texttt{CCD_ID} \text{ dependent value in the column } \texttt{TCTIX} \text{ of the} \\ \quad \texttt{ctifile}, \\ \texttt{FP_TEMPO} \text{ is the name of a keyword in the } \texttt{ctifile}, \end{cases}$$

$$T = \left(\frac{t' - t'_k}{t'_{k+1} - t'_k}\right)(\texttt{FP_TEMP}_{k+1} - \texttt{FP_TEMP}_k) + \texttt{FP_TEMP}_k, \qquad (500)$$

$$\{\ T \text{ is the time dependent focal plane temperature,}$$

$$t' = t + \texttt{TIMEDEL}_{\text{in}}\,(\texttt{TIMEPIXR}_{\text{evt}} - 0.5)\,, \qquad (501)$$

$$\left\{\begin{array}{l} t \text{ is the } \texttt{TIME} \text{ of the event,} \\ \texttt{TIMEPIXR}_{\rm evt} \text{ is a keyword in the } \texttt{infile}, \end{array}\right.$$

$$t'_k = \texttt{TIME}_k + \texttt{TIMEDEL}_{\rm mtl}\left(\texttt{TIMEPIXR}_{\rm mtl} - 0.5\right), \tag{502}$$

$$\left\{\begin{array}{l} \texttt{TIME}_k \text{ is the } k^{\rm th} \text{ element of the column } \texttt{TIME} \text{ in the } \texttt{mtlfile}, \\ t'_k \leq t', \\ \text{If } t' < t'_k \text{ for } k = 0, \text{ then } k = 0, \\ \texttt{FP_TEMP}_k \text{ is the } k^{\rm th} \text{ element of the column } \texttt{FP_TEMP} \text{ in the } \texttt{mtlfile}, \\ \texttt{TIMEDEL}_{\rm mtl} \text{ is a keyword in the } \texttt{mtlfile}, \\ \texttt{TIMEPIXR}_{\rm mtl} \text{ is a keyword in the } \texttt{mtlfile}, \end{array}\right.$$

$$t'_{k+1} = \texttt{TIME}_{k+1} + \texttt{TIMEDEL}_{\rm mtl}\left(\texttt{TIMEPIXR}_{\rm mtl} - 0.5\right), \tag{503}$$

$$\left\{\begin{array}{l} \texttt{TIME}_{k+1} \text{ is the } (k+1)^{\rm th} \text{ element of the column } \texttt{TIME} \text{ in the } \texttt{mtlfile}, \\ t'_{k+1} > t', \\ \text{If } t' > t'_k \text{ for } k = n, \text{ where } n \text{ is the last element, then } k = n, \\ \texttt{FP_TEMP}_{k+1} \text{ is the } (k+1)^{\rm th} \text{ element of the column } \texttt{FP_TEMP} \text{ in the} \\ \quad \texttt{mtlfile}, \end{array}\right.$$

$$\rho_x[j] = \text{serial trap density}, \tag{504}$$

$$\left\{\begin{array}{l} \rho_x[j] \text{ depends upon the } \texttt{CCD_ID} \text{ and upon the } \texttt{CHIPX} \text{ and nint}(\texttt{CHIPY_ADJ}) \\ \quad \text{coordinates associated with element } j \text{ of } \texttt{PHAS_ADJ}[j] \text{ (see Fig. 1)}, \end{array}\right.$$

$$V_x[j] = \left(\frac{\texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \texttt{PHA}_l}{\texttt{PHA}_{l+1} - \texttt{PHA}_l}\right)\left(\texttt{VOLUME_X}_{l+1} - \texttt{VOLUME_X}_l\right) + \texttt{VOLUME_X}_l, \tag{505}$$

$$\left\{\begin{array}{l} \texttt{PHA}_l \text{ is the } l^{\rm th} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_l \text{ (and } \texttt{PHA}_{l+1}\text{) are } \texttt{CCD_ID} \text{ depdendent}, \\ \texttt{PHA}_l \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_l > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \texttt{PHA}_{l+1} \text{ is the } (l+1)^{\rm th} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_{l+1} > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_{l+1} \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \quad \text{element, then } l = n, \\ \texttt{VOLUME_X}_l \text{ is the } l^{\rm th} \text{ element of the column } \texttt{VOLUME_X} \text{ in the } \texttt{ctifile}, \\ \texttt{VOLUME_X}_l, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_l, \\ \texttt{VOLUME_X}_{l+1} \text{ is the } (l+1)^{\rm th} \text{ element of the column } \texttt{VOLUME_X} \text{ in the} \\ \quad \texttt{ctifile}, \text{ and} \\ \texttt{VOLUME_X}_{l+1}, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_{l+1} \end{array}\right.$$

B. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID` = 1 or 3, then the values of $\Delta_x$ are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0] - c'_x[1]s_x\rho_x[1]V_x[1], \tag{506}$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[2]s_x\rho_x[2]V_x[2], \tag{507}$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2], \tag{508}$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3] - c'_x[4]s_x\rho_x[4]V_x[4], \tag{509}$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[5]s_x\rho_x[5]V_x[5], \tag{510}$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5], \tag{511}$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6] - c'_x[7]s_x\rho_x[7]V_x[7], \tag{512}$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[8]s_x\rho_x[8]V_x[8], \text{ and} \tag{513}$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8], \tag{514}$$

where

$$c_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold} \\ \quad \text{(for all } j\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \quad \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 2, 5, 8\text{)} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \quad \texttt{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \\ \quad \text{(for } j = 0, 1, 3, 4, 6, 7\text{)}, \end{cases} \end{cases}$$

$$c'_x[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold or} \\ \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] < \text{ split threshold or} \\ j \rightarrow \texttt{CHIPX} = 257, 512, 769, \text{ or } 1024 \\ \quad \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{cases} \\ \texttt{FRCTRLX} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \geq \text{ split threshold} \\ \quad \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \quad \texttt{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{cases} \end{cases}$$

and $s_x$, $T$, $t'$, $t'_k$, $t'_{k+1}$, $\rho_x[j]$, and $V_x[j]$ are given by equations. 499, 500, 501, 502, 503, 504, and 505, respectively.

v. If there is a parallel CTI trap-density map in the `ctifile` for `CCD_ID`, then the values of $\Delta_y$ are given by

$$\Delta_y[0] = c_y[0] s_y \rho_y[0] V_y[0], \tag{515}$$
$$\Delta_y[1] = c_y[1] s_y \rho_y[1] V_y[1], \tag{516}$$
$$\Delta_y[2] = c_y[2] s_y \rho_y[2] V_y[2], \tag{517}$$
$$\Delta_y[3] = c_y[3] s_y \rho_y[3] V_y[3] - c'_y[0] s_y \rho_y[0] V_y[0], \tag{518}$$
$$\Delta_y[4] = c_y[4] s_y \rho_y[4] V_y[4] - c'_y[1] s_y \rho_y[1] V_y[1], \tag{519}$$
$$\Delta_y[5] = c_y[5] s_y \rho_y[5] V_y[5] - c'_y[2] s_y \rho_y[2] V_y[2], \tag{520}$$
$$\Delta_y[6] = c_y[6] s_y \rho_y[6] V_y[6] - c'_y[3] s_y \rho_y[3] V_y[3], \tag{521}$$
$$\Delta_y[7] = c_y[7] s_y \rho_y[7] V_y[7] - c'_y[4] s_y \rho_y[4] V_y[4], \text{ and} \tag{522}$$
$$\Delta_y[8] = c_y[8] s_y \rho_y[8] V_y[8] - c'_y[5] s_y \rho_y[5] V_y[5], \tag{523}$$

where

$$c_y[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold} \\ \quad \text{(for all } j\text{)}, \end{cases} \\ \texttt{FRCTRLY} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \quad \texttt{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \quad \text{(for } j = 3,4,5,6,7,8\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,2\text{)} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \quad \texttt{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \quad \text{(for } j = 3,4,5,6,7,8\text{)}, \end{cases} \end{cases}$$

$$c'_y[j] = \begin{cases} 0 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{ split threshold or} \\ \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] < \text{ split threshold or} \\ j \rightarrow \texttt{CHIPY} = 1\text{or } 1024 \\ \quad \text{(for } j = 1,2,3,4,5\text{)}, \end{cases} \\ \texttt{FRCTRLY} & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \quad \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,2,3,4,5\text{)}, \end{cases} \\ 1 & \begin{cases} \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \quad \texttt{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{ split threshold} \\ \quad \text{(for } j = 0,1,2,3,4,5\text{)}, \end{cases} \end{cases}$$

$$s_y = 1 + \texttt{TCTIY}\,(T - \texttt{FP_TEMPO})\,, \tag{524}$$

$$\begin{cases} s_y \text{ is a temperature dependent scaling factor,} \\ \texttt{TCTIY} \text{ is the } \texttt{CCD_ID} \text{ dependent value in the column } \texttt{TCTIY} \text{ of the} \\ \quad \texttt{ctifile}, \\ \texttt{FP_TEMPO} \text{ is the name of a keyword in the } \texttt{ctifile}, \end{cases}$$

$$\rho_y[j] = \text{parallel trap density,} \tag{525}$$

$$\begin{cases} \rho_y[j] \text{ depends upon the } \texttt{CCD_ID} \text{ and upon the } \texttt{CHIPX} \text{ and nint}(\texttt{CHIPY_ADJ}) \\ \quad \text{coordinates associated with element } j \text{ of } \texttt{PHAS_ADJ}[j] \text{ (see Fig. 1),} \end{cases}$$

$$V_y[j] = \left(\frac{\texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \texttt{PHA}_l}{\texttt{PHA}_{l+1} - \texttt{PHA}_l}\right)(\texttt{VOLUME_Y}_{l+1} - \texttt{VOLUME_Y}_l) + \texttt{VOLUME_Y}_l, \tag{526}$$

$$\begin{cases} \texttt{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_l \text{ (and } \texttt{PHA}_{l+1}\text{) are } \texttt{CCD_ID} \text{ depdendent,} \\ \texttt{PHA}_l \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_l > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \texttt{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column } \texttt{PHA} \text{ in the } \texttt{ctifile}, \\ \texttt{PHA}_{l+1} > \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \texttt{PHA}_{l+1} \leq \texttt{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \quad \text{element, then } l = n, \\ \texttt{VOLUME_Y}_l \text{ is the } l^{\text{th}} \text{ element of the column } \texttt{VOLUME_Y} \text{ in the } \texttt{ctifile}, \\ \texttt{VOLUME_Y}_l, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_l, \\ \texttt{VOLUME_Y}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column } \texttt{VOLUME_Y} \text{ in the} \\ \quad \texttt{ctifile}, \\ \texttt{VOLUME_Y}_{l+1}, \text{ which is } \texttt{CCD_ID} \text{ depdendent, is associated with } \texttt{PHA}_{l+1}, \end{cases}$$

and $T$, $t'$, $t'_k$, and $t'_{k+1}$, are given by equations. 500, 501, 502, and 503, respectively.

vi. The CTI-adjusted pulse heights

$$\texttt{PHAS_ADJ}[j] = \texttt{PHAS}[j] + \Delta_x[j] + \Delta_y[j] \tag{527}$$

for all $j$.

vii. A. If

$$|\texttt{PHAS_ADJ}'[j] - \texttt{PHAS_ADJ}[j]| < \texttt{cticonverge} \text{ (for all } j\text{) and} \tag{528}$$
$$n \leq \texttt{max_cti_iter}, \tag{529}$$

then the computation of PHAS_ADJ is complete for the event.

B. If

$$|\texttt{PHAS_ADJ}'[j] - \texttt{PHAS_ADJ}[j]| \geq \texttt{cticonverge} \text{ (for one or more } j\text{) and} \tag{530}$$
$$n < \texttt{max_cti_iter}, \tag{531}$$

then $n = n + 1$ and steps 1.5.18(a)iii–1.5.18(a)vii are repeated.

C. If

$$|\texttt{PHAS_ADJ}'[j] - \texttt{PHAS_ADJ}[j]| \geq \texttt{cticonverge} \text{ (for one or more } j\text{) and} \tag{532}$$
$$n \geq \texttt{max_cti_iter}, \tag{533}$$

then no additional iterations are performed, the values of PHAS_ADJ[$j$] from the most recent iteration are used as are, and STATUS[$k$] = 1 for bit $k = 20$ to indicate that the CTI adjustment did not converge.

19. FLTGRADE:

(a) If HDU $h_{\rm in}$ of the infile includes the column PHAS and

$$\texttt{apply_cti} = \text{yes and} \tag{534}$$
$$\texttt{doevtgrade} = \text{yes}, \tag{535}$$

then

$$\texttt{FLTGRADE} = c_{\rm f}[0] + 2c_{\rm f}[1] + 4c_{\rm f}[2] + 8c_{\rm f}[3] + \tag{536}$$
$$16c_{\rm f}[5] + 32c_{\rm f}[6] + 64c_{\rm f}[7] + 128c_{\rm f}[8]. \tag{537}$$

The values of $c_{\rm f}[j]$ are determined as follows.

i. Each value of $c_{\rm f}[j]$ is initialized such that

$$c_{\rm f}[j] = 1. \tag{538}$$

ii. If

$$\texttt{PHAS_ADJ}[j] < \text{split threshold}, \tag{539}$$

then

$$c_{\rm f}[j] = 0. \tag{540}$$

The elements $j = 0$–$8$ of PHAS_ADJ are depicted in Figure 1.

(b) If HDU $h_{\rm in}$ of the `infile` includes the column `PHAS` and

$$\texttt{apply_cti} = \text{no and} \tag{541}$$
$$\texttt{doevtgrade} = \text{yes,} \tag{542}$$

then

$$\texttt{FLTGRADE} = \texttt{FLTGRADE_RO}. \tag{543}$$

(c) If HDU $h_{\rm in}$ of the `infile` does not include the column `PHAS` or

$$\texttt{doevtgrade} = \text{no,} \tag{544}$$

then

i. If HDU $h_{\rm in}$ of the `infile` includes the column `FLTGRADE`, then

$$\texttt{FLTGRADE} = \texttt{FLTGRADE}_{\rm in}. \tag{545}$$

ii. If HDU $h_{\rm in}$ of the `infile` does not include the column `FLTGRADE`, then

$$\texttt{FLTGRADE} = \text{NULL}. \tag{546}$$

20. `GRADE`:

(a) If

$$\texttt{FLTGRADE} \neq \text{NULL and} \tag{547}$$
$$\texttt{gradefile} \neq \text{none and} \tag{548}$$

HDU $h_{\rm grade}$ of the `gradefile` has a row $r$, where

$$\texttt{FLTGRADE}_{\rm grade}[r] = \texttt{FLTGRADE}, \tag{549}$$

then

$$\texttt{GRADE} = \texttt{GRADE}_{\rm grade}[r]. \tag{550}$$

(b) If

$$\texttt{FLTGRADE} = \text{NULL or} \tag{551}$$
$$\texttt{gradefile} = \text{none or} \tag{552}$$

HDU $h_{\rm grade}$ of the `gradefile` does not have a row $r$, where

$$\texttt{FLTGRADE}_{\rm grade}[r] = \texttt{FLTGRADE}, \tag{553}$$

then

$$\texttt{GRADE} = \text{NULL}. \tag{554}$$

21. `PHA`, including time-dependent gain:

(a) If HDU $h_{\rm in}$ of the `infile` includes the column `PHAS` and

$$\texttt{apply_cti} = \text{yes and} \tag{555}$$
$$\texttt{doevtgrade} = \text{yes and} \tag{556}$$
$$\texttt{GRADE} \neq \text{NULL}, \tag{557}$$

then

$$\texttt{PHA} = \sum_{j=0}^{8} c_{\rm p}[j]\texttt{PHAS_ADJ}[j]. \tag{558}$$

The values of $c_{\rm p}[j]$ are determined as follows.

i. Each value of $c_{\rm p}[j]$ is initialized such that

$$c_{\rm p}[j] = 1. \tag{559}$$

ii. If

$$\texttt{PHAS_ADJ}[j] < \text{split threshold}, \tag{560}$$

then

$$c_{\rm p}[j] = 0. \tag{561}$$

iii. If

$$\texttt{CORNERS} = -1, \tag{562}$$

then

$$c_{\rm p}[0] = 0 \text{ and} \tag{563}$$
$$c_{\rm p}[2] = 0 \text{ and} \tag{564}$$
$$c_{\rm p}[6] = 0 \text{ and} \tag{565}$$
$$c_{\rm p}[8] = 0. \tag{566}$$

iv. If

$$\texttt{CORNERS} = 0, \tag{567}$$

then there are no additional constraints on $c_{\rm p}[0]$, $c_{\rm p}[2]$, $c_{\rm p}[6]$, and $c_{\rm p}[8]$.

v. If

$$\texttt{CORNERS} = 1, \tag{568}$$

then

A. If

$$c_{\rm p}[1] = 0 \text{ and} \tag{569}$$
$$c_{\rm p}[3] = 0, \tag{570}$$

then

$$c_{\rm p}[0] = 0. \tag{571}$$

B. If

$$c_{\mathrm{p}}[1] = 0 \text{ and} \tag{572}$$
$$c_{\mathrm{p}}[5] = 0, \tag{573}$$

then

$$c_{\mathrm{p}}[2] = 0. \tag{574}$$

C. If

$$c_{\mathrm{p}}[3] = 0 \text{ and} \tag{575}$$
$$c_{\mathrm{p}}[7] = 0, \tag{576}$$

then

$$c_{\mathrm{p}}[6] = 0. \tag{577}$$

D. If

$$c_{\mathrm{p}}[5] = 0 \text{ and} \tag{578}$$
$$c_{\mathrm{p}}[7] = 0, \tag{579}$$

then

$$c_{\mathrm{p}}[8] = 0. \tag{580}$$

vi. If

$$\texttt{CORNERS} = 2, \tag{581}$$

then

A. If

$$c_{\mathrm{p}}[1] = 0 \text{ or} \tag{582}$$
$$c_{\mathrm{p}}[3] = 0 \text{ or} \tag{583}$$
$$\texttt{GRADE} \neq 6, \tag{584}$$

then

$$c_{\mathrm{p}}[0] = 0. \tag{585}$$

B. If

$$c_{\mathrm{p}}[1] = 0 \text{ or} \tag{586}$$
$$c_{\mathrm{p}}[5] = 0 \text{ or} \tag{587}$$
$$\texttt{GRADE} \neq 6, \tag{588}$$

then

$$c_{\mathrm{p}}[2] = 0. \tag{589}$$

C. If

$$c_{\rm p}[3] = 0 \text{ or} \tag{590}$$
$$c_{\rm p}[7] = 0 \text{ or} \tag{591}$$
$$\texttt{GRADE} \neq 6, \tag{592}$$

then

$$c_{\rm p}[6] = 0. \tag{593}$$

D. If

$$c_{\rm p}[5] = 0 \text{ or} \tag{594}$$
$$c_{\rm p}[7] = 0 \text{ or} \tag{595}$$
$$\texttt{GRADE} \neq 6, \tag{596}$$

then

$$c_{\rm p}[8] = 0. \tag{597}$$

The elements $j = 0$–$8$ of PHAS_ADJ are depicted in Figure 1.

(b) If HDU $h_{\rm in}$ of the infile does not include the column PHAS or

$$\texttt{apply_cti} = \text{no or} \tag{598}$$
$$\texttt{doevtgrade} = \text{no or} \tag{599}$$
$$\texttt{GRADE} = \text{NULL}, \tag{600}$$

then

$$\texttt{PHA} = \texttt{PHA_RO}. \tag{601}$$

(c) If

$$\texttt{apply_tgain} = \text{yes}, \tag{602}$$

then

$$\texttt{PHA} = \texttt{PHA} - \text{int}\left[\left(\frac{\texttt{TIME} - \texttt{EPOCH1}}{\texttt{EPOCH2} - \texttt{EPOCH1}}\right)(\delta_2 - \delta_1) + \delta_1 - \epsilon\right], \tag{603}$$

where

$$\text{int} = \text{the integer portion of (i.e. truncate or round down)}, \tag{604}$$
$$\texttt{TIME} = \text{the time of the event}, \tag{605}$$
$$\texttt{EPOCH1} = \text{a keyword in the } \texttt{tgainfile}, \tag{606}$$
$$\texttt{EPOCH2} = \text{a keyword in the } \texttt{tgainfile}, \tag{607}$$
$$\delta_1 = \left(\frac{\texttt{PHA} - \texttt{PHA}_m[r]}{\texttt{PHA}_{m+1}[r] - \texttt{PHA}_m[r]}\right)(\texttt{DELTPHA1}_{m+1}[r] - \texttt{DELTPHA1}_m[r]) + \tag{608}$$
$$\texttt{DELTPHA1}_m[r], \tag{609}$$

$$\begin{cases} r \text{ is the row of the } \texttt{tgainfile} \text{ where} \\ \quad \begin{cases} \texttt{CCD_ID}[r] = \texttt{CCD_ID}, \\ \texttt{CHIPX_LO}[r] \leq \texttt{CHIPX}, \\ \texttt{CHIPX_HI}[r] \geq \texttt{CHIPX}, \\ \texttt{CHIPY_LO}[r] \leq \text{nint}(\texttt{CHIPY_ADJ}), \text{ and} \\ \texttt{CHIPY_HI}[r] \geq \text{nint}(\texttt{CHIPY_ADJ}). \end{cases} \\ m \text{ is the element of row } r \text{ where} \\ \quad \begin{cases} \texttt{PHA}_m[r] \leq \texttt{PHA} \text{ and} \\ \texttt{PHA}_{m+1}[r] > \texttt{PHA}. \\ \text{If } \texttt{PHA} < \texttt{PHA}_m[r] \text{ for } m = 0, \text{ then } m = 0. \\ \text{If } \texttt{PHA} \geq \texttt{PHA}_m[r] \text{ for } m = M \text{ and } M \text{ is the last element of } \texttt{PHA}[r], \\ \qquad \text{then } m = M - 1. \end{cases} \\ \text{The } \texttt{tgainfile} \text{ includes a binary table with columns named} \\ \quad \texttt{CCD_ID}, \texttt{CHIPX_LO}, \texttt{CHIPX_HI}, \texttt{CHIPY_LO}, \texttt{CHIPY_HI}, \texttt{PHA}, \texttt{DELTPHA1}, \text{ and} \\ \quad \texttt{DELTPHA2}. \end{cases} \tag{610}$$

$$\delta_2 = \left( \frac{\texttt{PHA} - \texttt{PHA}_m[r]}{\texttt{PHA}_{m+1}[r] - \texttt{PHA}_m[r]} \right) (\texttt{DELTPHA2}_{m+1}[r] - \texttt{DELTPHA2}_m[r]) + \tag{611}$$

$$\texttt{DELTPHA2}_m[r], \tag{612}$$

$$\epsilon = \text{is a uniform random deviate in the range } [0, 1), \tag{613}$$

$$\left\{ \text{ If } \texttt{rand_pha} = \text{no}, \text{ then } \epsilon = 0. \right. \tag{614}$$

(d) If

$$\texttt{PHA} \geq 32767, \tag{615}$$

then $\texttt{STATUS}[k] = 1$ for bit $k = 3$.

22. CORN_PHA:

(a) If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{616}$$

then the value of CORN_PHA is read from the infile.

23. ENERGY:

(a) If the parameter calculate_pi = yes and the parameter gainfile is specified and $\texttt{PHA} > 0$, then

i. The row $i$ in the gainfile is identified such that

$$\texttt{CCD_ID} = \texttt{CCD_ID}_{\text{gain},i}, \tag{617}$$

$$\texttt{CHIPX_MIN}_{\text{gain},i} \leq \texttt{CHIPX} \leq \texttt{CHIPX_MAX}_{\text{gain},i}, \qquad \text{and} \tag{618}$$

$$\texttt{CHIPY_MIN}_{\text{gain},i} \leq \text{nint}(\texttt{CHIPY_ADJ}) \leq \texttt{CHIPY_MAX}_{\text{gain},i}, \tag{619}$$

where $\texttt{CCD_ID}_{\text{gain}}$, $\texttt{CHIPX_MIN}_{\text{gain}}$, $\texttt{CHIPX_MAX}_{\text{gain}}$, $\texttt{CHIPY_MIN}_{\text{gain}}$, and $\texttt{CHIPY_MAX}_{\text{gain}}$ are columns in the gainfile.

ii. A uniform random deviate $\Delta p$ is computed over the interval from $[-0.5, +0.5)$.

iii. The element $j$ of row $i$ of $\texttt{PHA}_{\text{gain}}$ is identified such that

$$\texttt{PHA}_{\text{gain},i}[j] \leq (\texttt{PHA} + \Delta p) < \texttt{PHA}_{\text{gain},i}[j+1], \tag{620}$$

where $\texttt{PHA}_{\text{gain}}$ is a vector column in the gainfile. If $\texttt{PHA} + \Delta p < \texttt{PHA}_{\text{gain},i}[0]$, then $j = 0$. If $\texttt{PHA}_{\text{gain},i}[\texttt{NPOINTS} - 2] \leq \texttt{PHA} + \Delta p$, then $j = \texttt{NPOINTS} - 2$, where NPOINTS is a column in the gainfile.

iv. The ENERGY of an event is computed from the PHA of the event:

$$\texttt{ENERGY} = \left(\frac{\texttt{PHA} + \Delta p - \texttt{PHA}_{\text{gain},i}[j]}{\texttt{PHA}_{\text{gain},i}[j+1] - \texttt{PHA}_{\text{gain},i}[j]}\right)(\texttt{ENERGY}_{\text{gain},i}[j+1] - \texttt{ENERGY}_{\text{gain},i}[j]) + \texttt{ENERGY}_{\text{gain},i}[j], \tag{621}$$

where $\texttt{ENERGY}_{\text{gain}}$ is a vector column in the gainfile.

v. If $\texttt{ENERGY} < 0$, then $\texttt{ENERGY} = 0$.

(b) If the parameter calculate_pi = yes and the parameter gainfile is specified and $\texttt{PHA} \leq 0$, then $\texttt{ENERGY} = 0$.

(c) If the parameter calculate_pi = no or if the parameter gainfile is not specified, then

i. If the infile includes the ENERGY of an event, then the ENERGY of the event is equal to the ENERGY in the infile.

ii. If the infile does not include the ENERGY of an event, then $\texttt{ENERGY} = 0$.

24. PI:

(a) If

$$\texttt{calculate_pi} = \text{yes}, \tag{622}$$

then

i.

$$\texttt{PI} = \text{int}\left(\frac{\texttt{ENERGY}}{\texttt{pi_bin_width}}\right) + 1, \tag{623}$$

where "int" indicates the integer portion of what is in parentheses (i.e. the value is truncated or rounded down).

ii. If

$$\texttt{PI} < 1, \tag{624}$$

then $\texttt{PI} = 1$.

iii. If

$$\texttt{PI} > \texttt{pi_num_bins}, \tag{625}$$

then $\texttt{PI} = \texttt{pi_num_bins}$.

(b) If

$$\texttt{calculate_pi} = \text{no} \tag{626}$$

and the infile includes the value of PI for an event, then the value of PI is read from the infile.

25. pix_adj:

(a) centroid:

i. If

$$\texttt{pix_adj} = \text{centroid} \tag{627}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{628}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \tag{629}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \tag{630}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT}, \tag{631}$$

then

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX_ADJ} - w'[0] + w'[2] - w'[3] + w'[5] - w'[6] + w'[8] \text{ and} \quad (632)$$

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_ADJ} - w'[0] - w'[1] - w'[2] + w'[6] + w'[7] + w'[8], \quad (633)$$

where

$$w'[j] = \frac{w[j]}{\sum_{j=0}^{8} w[j]}, \quad (634)$$

$$w[j] = \begin{cases} p[j] & \text{if the pixel is valid} \\ 0 & \text{if the pixel is invalid,} \end{cases} \quad (635)$$

$$p[j] = \begin{cases} \texttt{PHAS_ADJ}[j] & \text{if } \texttt{apply_cti} = \text{yes} \\ \texttt{PHAS}[j] & \text{if } \texttt{apply_cti} = \text{no,} \end{cases} \quad (636)$$

and the pixel is invalid if

$$\beta[j] = 0 \text{ or} \quad (637)$$

$$\texttt{STATUS}[0] = 1 \text{ or} \quad (638)$$

$$\texttt{STATUS}[1] = 1 \text{ or} \quad (639)$$

$$\texttt{STATUS}[2] = 1 \text{ or} \quad (640)$$

$$\texttt{STATUS}[3] = 1 \text{ or} \quad (641)$$

$$\texttt{STATUS}[4] = 1 \text{ or} \quad (642)$$

$$\texttt{STATUS}[11] = 1 \text{ or} \quad (643)$$

$$\texttt{STATUS}[13] = 1 \text{ or} \quad (644)$$

$$\texttt{STATUS}[14] = 1 \text{ or} \quad (645)$$

$$\texttt{STATUS}[15] = 1 \text{ or} \quad (646)$$

$$\texttt{STATUS}[16] = 1. \quad (647)$$

ii. If

$$\texttt{pix_adj} = \text{centroid and} \quad (648)$$

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT}, \quad (649)$$

then

$$\texttt{TIME} = \texttt{TIME} + (w'[0] + w'[1] + w'[2] - w'[6] - w'[7] - w'[8]) \times \texttt{TIMEDEL}_{\text{in}}. \quad (650)$$

Note that it is possible for the centroid algorithm to yield adjustments to `CHIPX_ADJ` and/or `CHIPY_ADJ` that are greater than half a pixel. However, the adjustment cannot equal or exceed one pixel.

(b) edser:

i. If

$$\texttt{pix_adj} = \text{edser} \quad (651)$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \quad (652)$$

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED or} \quad (653)$$

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (654)$$

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \quad (655)$$

$$\texttt{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (656)$$

$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (657)$$

then

A. If

$$\texttt{ENERGY} \neq \text{NaN and} \tag{658}$$
$$\texttt{ENERGY} > 0, \tag{659}$$

then

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX_ADJ} + \left(\frac{\texttt{ENERGY} - E[k]}{E[k+1] - E[k]}\right)(\Delta X[k+1] - \Delta X[k]) + \Delta X[k], \tag{660}$$

and

$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_ADJ} + \left(\frac{\texttt{ENERGY} - E[k]}{E[k+1] - E[k]}\right)(\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k], \tag{661}$$

where $E[k]$ and $E[k+1]$, $\Delta X[k]$ and $\Delta X[k+1]$, and $\Delta Y[k]$ and $\Delta Y[k+1]$ are the $k$ and $(k+1)^{th}$ elements of the vector columns $\texttt{ENERGY}_{\text{subpix}}$, $\texttt{CHIPX_OFFSET}_{\text{subpix}}$, and $\texttt{CHIPY_OFFSET}_{\text{subpix}}$, respectively. These columns are in the HDU of the `subpixfile` where the value of the keyword `CCD_ID` is equal to the value of the `CCD_ID` of the event. The appropriate row of these columns is the one where $\texttt{FLTGRADE}_{\text{subpix}} = \texttt{FLTGRADE}$. The values of $k$ are the ones where

$$\texttt{ENERGY} \geq E[k] \text{ and} \tag{662}$$
$$\texttt{ENERGY} < E[k+1]. \tag{663}$$

Note that if

$$\texttt{ENERGY} \leq E[0], \tag{664}$$

then $k = 0$. Similarly, if

$$\texttt{ENERGY} \geq E[\texttt{NPOINTS}_{\text{subpix}} - 2], \tag{665}$$

then $k = \texttt{NPOINTS}_{\text{subpix}} - 2$.

B. If

$$\texttt{ENERGY} = \text{NaN or} \tag{666}$$
$$\texttt{ENERGY} \leq 0, \tag{667}$$

then the `CHIPX_ADJ` and `CHIPY_ADJ` coordinates are not modified.

ii. If

$$\texttt{pix_adj} = \text{edser} \tag{668}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{669}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{670}$$

then

A. If

$$\texttt{ENERGY} \neq \text{NaN and} \tag{671}$$
$$\texttt{ENERGY} > 0, \tag{672}$$

then

$$\texttt{TIME} = \texttt{TIME} - \left(\left(\frac{\texttt{ENERGY} - E[k]}{E[k+1] - E[k]}\right)(\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k]\right) \times \texttt{TIMEDEL}_{\text{in}}, \tag{673}$$

B. If

$$\texttt{ENERGY} = \text{NaN or} \tag{674}$$
$$\texttt{ENERGY} \leq 0, \tag{675}$$

then the TIME is not modified.

(c) none:
If

$$\texttt{pix_adj} = \text{none}, \tag{676}$$

then

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX_ADJ} \text{ and} \tag{677}$$
$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_ADJ} \text{ and} \tag{678}$$
$$\texttt{TIME} = \texttt{TIME}. \tag{679}$$

No sub-pixel adjustments are applied to the values of CHIPX_ADJ and CHIPY_ADJ (for timed exposure mode) or CHIPX_ADJ and TIME (for continuous-clocking mode).

(d) randomize:

i. If

$$\texttt{pix_adj} = \text{randomize}, \tag{680}$$

then

$$\texttt{CHIPX_ADJ} = \texttt{CHIPX_ADJ} + \epsilon_x \text{ and} \tag{681}$$
$$\texttt{CHIPY_ADJ} = \texttt{CHIPY_ADJ} + \epsilon_y, \tag{682}$$

where $\epsilon_x$ and $\epsilon_y$ are a uniform random deviates in the range $[-0.5, +0.5)$ pixel.

ii. If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{683}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{684}$$

then

$$\texttt{TIME} = \texttt{TIME} - \epsilon_y \times \texttt{TIMEDEL}_{\text{in}}. \tag{685}$$

(e) If

$$\texttt{CHIPX_ADJ} < 0.5, \tag{686}$$

then

$$\texttt{CHIPX_ADJ} = 1. \tag{687}$$

(f) If

$$\texttt{CHIPX_ADJ} \geq 1024.5, \tag{688}$$

then

$$\texttt{CHIPX_ADJ} = 1024. \tag{689}$$

(g) If

$$\texttt{CHIPY_ADJ} < 0.5, \tag{690}$$

then

$$\texttt{CHIPY_ADJ} = 1. \tag{691}$$

(h) If

$$\texttt{CHIPY_ADJ} \geq 1024.5, \tag{692}$$

then

$$\texttt{CHIPY_ADJ} = 1024. \tag{693}$$

26. `X` and `Y`:

(a) If

$$\texttt{stop} = \text{sky}, \tag{694}$$

then

i. If

$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT or} \tag{695}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{FAINT_BIAS or} \tag{696}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{GRADED or} \tag{697}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{VFAINT}, \tag{698}$$

then the values of `X` and `Y` are computed using the real-valued coordinates `CHIPX_ADJ` and `CHIPY_ADJ` and the orientation of the telescope (i.e. `RA`, `DEC`, and `ROLL`) at the time `TIME`.

ii. If

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{699}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{700}$$

then the values of `X` and `Y` are computed using the real-valued coordinates `CHIPX_ADJ` and $\texttt{CHIPY_TARG}_{\text{eff}}$ and the orientation of the telescope (i.e. `RA`, `DEC`, and `ROLL`) at the time `TIME`.

iii. If

$$\texttt{acaofffile} \neq \text{none} \tag{701}$$

and

$$\texttt{CONTENT}_{\text{in}} \neq \text{TGEVT1} \tag{702}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{703}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{704}$$

then

$$\texttt{X} = \text{NaN and} \tag{705}$$
$$\texttt{Y} = \text{NaN}. \tag{706}$$

iv. If

$$\texttt{acaofffile} \neq \text{none} \tag{707}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 and} \tag{708}$$
$$\texttt{CHIPY_TG} = \text{NaN}, \tag{709}$$

then

$$\texttt{X} = \text{NaN and} \tag{710}$$
$$\texttt{Y} = \text{NaN}. \tag{711}$$

27. SKY_1D:

(a) If

$$\texttt{stop} = \text{sky} \tag{712}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{713}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED}, \tag{714}$$

then

i. The value of SKY_1D is computed using the real-valued coordinates CHIPX_ADJ and $\texttt{CHIPY_TARG}_{\text{eff}}$ and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

ii. If

$$\texttt{acaofffile} \neq \text{none} \tag{715}$$

and

$$\texttt{CONTENT}_{\text{in}} \neq \text{TGEVT1} \tag{716}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{717}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{718}$$

then

$$\texttt{SKY_1D} = \text{NaN}. \tag{719}$$

iii. If

$$\texttt{acaofffile} \neq \text{none} \tag{720}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 and} \tag{721}$$
$$\texttt{CHIPY_TG} = \text{NaN}, \tag{722}$$

then

$$\texttt{SKY_1D} = \text{NaN}. \tag{723}$$

28. DETX and DETY:

(a) If

$$\texttt{stop} = \text{det or} \tag{724}$$
$$\texttt{stop} = \text{tan or} \tag{725}$$
$$\texttt{stop} = \text{sky,} \tag{726}$$

then

i. The values of DETX and DETY are computed using the real-valued coordinates CHIPX_ADJ and CHIPY_ADJ and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME.

ii. If

$$\texttt{acaofffile} \neq \text{none} \tag{727}$$

and

$$\texttt{CONTENT}_{\text{in}} \neq \text{TGEVT1} \tag{728}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{729}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{730}$$

then

$$\texttt{DETX} = \text{NaN and} \tag{731}$$
$$\texttt{DETY} = \text{NaN.} \tag{732}$$

iii. If

$$\texttt{acaofffile} \neq \text{none} \tag{733}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 and} \tag{734}$$
$$\texttt{CHIPY_TG} = \text{NaN,} \tag{735}$$

then

$$\texttt{DETX} = \text{NaN and} \tag{736}$$
$$\texttt{DETY} = \text{NaN.} \tag{737}$$

29. TDETX and TDETY:

(a) If

$$\texttt{stop} = \text{tdet or} \tag{738}$$
$$\texttt{stop} = \text{det or} \tag{739}$$
$$\texttt{stop} = \text{tan or} \tag{740}$$
$$\texttt{stop} = \text{sky} \tag{741}$$

then

i. The values of TDETX and TDETY are computed using the values of nint(CHIPX_ADJ) and nint(CHIPY_ADJ). Here, "nint" indicates that the real-valued coordinate is rounded to the nearest integer.

ii. If

$$\texttt{acaofffile} \neq \text{none} \tag{742}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{743}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{744}$$

and

$$\texttt{CONTENT}_{\text{in}} \neq \text{TGEVT1} \tag{745}$$

and

$$\texttt{TIME} < \texttt{TIME}_{\text{min}} \text{ or} \tag{746}$$
$$\texttt{TIME} \geq \texttt{TIME}_{\text{max}}, \tag{747}$$

then

$$\texttt{TDETX} = \text{NULL and} \tag{748}$$
$$\texttt{TDETY} = \text{NULL.} \tag{749}$$

iii. If

$$\texttt{acaofffile} \neq \text{none} \tag{750}$$

and

$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_FAINT or} \tag{751}$$
$$\texttt{DATAMODE}_{\text{in}} = \text{CC33_GRADED} \tag{752}$$

and

$$\texttt{CONTENT}_{\text{in}} = \text{TGEVT1 and} \tag{753}$$
$$\texttt{CHIPY_TG} = \text{NaN,} \tag{754}$$

then

$$\texttt{TDETX} = \text{NULL and} \tag{755}$$
$$\texttt{TDETY} = \text{NULL.} \tag{756}$$

### 1.5.4 Write outfile

1. PIX_ADJ:

   (a) If

$$\texttt{pix_adj} = \text{centroid,} \tag{757}$$

   then

$$\texttt{PIX_ADJ} = \text{CENTROID.} \tag{758}$$

(b) If

$$\texttt{pix_adj} = \text{edser}, \tag{759}$$

then

$$\texttt{PIX_ADJ} = \text{EDSER}. \tag{760}$$

(c) If

$$\texttt{pix_adj} = \text{none}, \tag{761}$$

then

$$\texttt{PIX_ADJ} = \text{NONE}. \tag{762}$$

(d) If

$$\texttt{pix_adj} = \text{randomize}, \tag{763}$$

then

$$\texttt{PIX_ADJ} = \text{RANDOMIZE}. \tag{764}$$

2. `RAND_SKY`:

(a) If

$$\texttt{pix_adj} = \text{centroid}, \tag{765}$$

then

$$\texttt{RAND_SKY} = 0.0. \tag{766}$$

(b) If

$$\texttt{pix_adj} = \text{edser}, \tag{767}$$

then

$$\texttt{RAND_SKY} = 0.0. \tag{768}$$

(c) If

$$\texttt{pix_adj} = \text{none}, \tag{769}$$

then

$$\texttt{RAND_SKY} = 0.0. \tag{770}$$

(d) If

$$\texttt{pix_adj} = \text{randomize}, \tag{771}$$

then

$$\texttt{RAND_SKY} = 0.5. \tag{772}$$

3. TIME_ADJ:

   (a) Timed-exposure mode:
   If

$$\texttt{DATAMODE}_{\rm in} = \text{FAINT or} \tag{773}$$
$$\texttt{DATAMODE}_{\rm in} = \text{FAINT_BIAS or} \tag{774}$$
$$\texttt{DATAMODE}_{\rm in} = \text{GRADED or} \tag{775}$$
$$\texttt{DATAMODE}_{\rm in} = \text{VFAINT,} \tag{776}$$

   then

$$\texttt{TIME_ADJ} = \text{NONE.} \tag{777}$$

   (b) Continuous-clocking mode:

      i. Set

$$\texttt{TIME_ADJ} = \text{MIDCHIP.} \tag{778}$$

      ii. If

$$\texttt{OBS_MODE}_{\rm in} = \text{pointing and} \tag{779}$$
$$\texttt{acaofffile} \neq \text{none} \tag{780}$$

      then

$$\texttt{TIME_ADJ} = \text{TARGET.} \tag{781}$$

      iii. If

$$\texttt{OBS_MODE}_{\rm in} = \text{pointing and} \tag{782}$$
$$\texttt{CONTENT}_{\rm in} = \text{TGEVT1,} \tag{783}$$

      then

$$\texttt{TIME_ADJ} = \text{GRATING.} \tag{784}$$

# 2 TBD

- Add the graded mode cti adjustment.
- Include all timed exposure mode processing.
- Should CONTENTs other than EVT0, EVT1, TGEVT1, and EVT2 be included?
- Should CONTENT = EVT2 be dropped?
- Should DATAMODEs other than CC33_FAINT, CC33_GRADED, FAINT, FAINT_BIAS, GRADED, and VFAINT be included?
- Are the $\beta$ in PHA_RO the same as the $\beta$ in PHA?
- Should something be done about SKY_1D?