



MIT Kavli Institute



Chandra X-Ray Center

## MEMORANDUM

September 28, 2016

**To:** Jonathan McDowell, SDS Group Leader  
**From:** Glenn E. Allen, SDS  
**Subject:** `acis_process_events` spec  
**Revision:** 4.16  
**URL:** <http://space.mit.edu/CXC/docs/docs.html#ape>  
**File:** `/nfs/inconceivable/d0/sds/specs/acis_process_events/ape_spec.4.16.tex`

### 1 `acis_process_events`

This spec, which is incomplete, describes some of processing steps for continuous-clocking mode data.

#### 1.1 Description

#### 1.2 Input

#### 1.3 Output

#### 1.4 Parameters

#### 1.5 Processing

##### 1.5.1 Error checking

The following steps are performed once prior to the processing of the data for each input ACIS event.

1. `obsfile`:

(a) Validation:

i. If

$$\text{obsfile} = \text{NONE}, \tag{1}$$

then `obsfile` is changed to “none”.

ii. Existence:

If

$$\text{obsfile} \neq \text{none} \tag{2}$$

and the `obsfile` does not exist, then `obsfile` is changed to “none” and `acis_process_events` produces a warning message.

iii. Permission:

If

$$\text{obsfile} \neq \text{none} \tag{3}$$

and the file permissions do not allow the `obsfile` to be read, then `obsfile` is changed to “none” and `acis_process_events` produces a warning message.

iv. OBS\_MODE:

If

$$\text{obsfile} \neq \text{none} \tag{4}$$

then

A. If the `obsfile` does not include the keyword `OBS_MODE`, then `OBS_MODEin` is set to “none”.

B. If the `obsfile` includes the keyword `OBS_MODE` then `OBS_MODEin` is set to `OBS_MODE`.

C. If

$$\text{OBS\_MODE}_{in} = \text{POINTING}, \tag{5}$$

then `OBS_MODEin` is set to “pointing”.

D. If

$$\text{OBS\_MODE}_{in} = \text{SECONDARY}, \tag{6}$$

then `OBS_MODEin` is set to “secondary”.

E. If

$$\text{OBS\_MODE}_{in} \neq \text{none and} \tag{7}$$

$$\text{OBS\_MODE}_{in} \neq \text{pointing and} \tag{8}$$

$$\text{OBS\_MODE}_{in} \neq \text{secondary}, \tag{9}$$

then `OBS_MODEin` is set to “none” and `acis_process_events` produces a warning message.

2. `acaofffile`:

(a) Validation:

If

$$\text{OBS\_MODE}_{in} = \text{pointing}, \tag{10}$$

then

i. If

$$\text{acaofffile} = \text{NONE}, \tag{11}$$

then `acaofffile` is set to “none.”

ii. Setting:

If

$$\text{acaofffile} = \text{none}, \tag{12}$$

then `acis_process_events` produces a warning message.

iii. Existence:

If

$$\text{acaofffile} \neq \text{none} \quad (13)$$

and the `acaofffile` does not exist, then `acis_process_events` produces a warning and `acaofffile` is set to “none.”

iv. Permission:

If the `acaofffile` exists and the file permissions do not allow it to be read, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

v. CONTENT:

If the `acaofffile` does not have an HDU  $h_{\text{acaoff}}$  with the keyword

$$\text{CONTENT} = \text{ASPSOL} \text{ or} \quad (14)$$

$$\text{CONTENT} = \text{OBCSOL}, \quad (15)$$

then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

vi. Keyword:

If HDU  $h_{\text{acaoff}}$  of the `acaofffile` does not include the keyword `TSTART`, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

vii. Columns:

If HDU  $h_{\text{acaoff}}$  of the `acaofffile` does not include the columns `TIME`, `RA`, `DEC`, and `ROLL` then `acis_process_events` produces a warning message and `acaofffile` is set to “none.” Hereafter, these columns are referred to as  $\text{TIME}_{\text{acaoff}}$ ,  $\text{RA}_{\text{acaoff}}$ ,  $\text{DEC}_{\text{acaoff}}$ , and  $\text{ROLL}_{\text{acaoff}}$ .

viii. Sequential:

If more than one valid `acaofffile` is specified and the the values `TSTART` are not in increasing order, then `acis_process_events` produces a warning message and `acaofffile` is set to “none.”

3. `alignmentfile`:

(a) Validation:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing}, \quad (16)$$

then

i. If

$$\text{alignmentfile} = \text{NONE}, \quad (17)$$

then `alignmentfile` is changed to “none.”

ii. Setting:

If

$$\text{alignmentfile} = \text{none}, \quad (18)$$

then `acis_process_events` produces a warning message.

iii. Existence:

If

$$\text{alignmentfile} \neq \text{none} \quad (19)$$

and the `alignmentfile` does not exist, then `acis_process_events` produces a warning message and `alignmentfile` is set to “none.”

iv. Permission:

If the `alignmentfile` exists and the file permissions do not allow it to be read, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

v. CONTENT:

If the `alignmentfile` does not have an HDU  $h_{\text{alignment}}$  with the keyword

$$\text{CONTENT} = \text{ASPSOL or} \quad (20)$$

$$\text{CONTENT} = \text{OBCSOL,} \quad (21)$$

then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

vi. Keyword:

If HDU  $h_{\text{alignment}}$  of the `alignmentfile` does not include the keyword TSTART, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

vii. Columns:

If HDU  $h_{\text{alignment}}$  of the `alignmentfile` does not include the columns DY, DZ, and DTHETA then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

viii. Sequential:

If more than one valid `alignmentfile` is specified and the values TSTART are not in increasing order, then `acis-process_events` produces a warning message and `alignmentfile` is set to “none.”.

#### 4. infile:

(a) Existence:

If the `infile` does not exist, then `acis-process_events` exits with an error message.

(b) Permission:

If the `infile` exists and the file permissions do not allow it to be read, then `acis-process_events` exits with an error message.

(c) Validation:

i. OBS\_MODE:

If  $\text{OBS\_MODE}_{\text{in}} = \text{none}$  and HDU  $h_{\text{in}}$  of the `infile` includes the keyword OBS\_MODE, then

A.  $\text{OBS\_MODE}_{\text{in}}$  is set to OBS\_MODE.

B. If

$$\text{OBS\_MODE}_{\text{in}} = \text{POINTING,} \quad (22)$$

then  $\text{OBS\_MODE}_{\text{in}}$  is set to “pointing”.

C. If

$$\text{OBS\_MODE}_{\text{in}} = \text{SECONDARY,} \quad (23)$$

then  $\text{OBS\_MODE}_{\text{in}}$  is set to “secondary”.

D. If

$$\text{OBS\_MODE}_{\text{in}} \neq \text{none and} \quad (24)$$

$$\text{OBS\_MODE}_{\text{in}} \neq \text{pointing and} \quad (25)$$

$$\text{OBS\_MODE}_{\text{in}} \neq \text{secondary,} \quad (26)$$

then  $\text{OBS\_MODE}_{\text{in}}$  is set to “none” and `acis-process_events` produces a warning message.

ii. DATAMODE:

The DATAMODE is read from the HDU  $h_{in}$  keyword of the same name. If the HDU  $h_{in}$  does not include the keyword DATAMODE or if

$$\text{DATAMODE} \neq \text{CC33\_FAINT and} \quad (27)$$

$$\text{DATAMODE} \neq \text{CC33\_GRADED and} \quad (28)$$

$$\text{DATAMODE} \neq \text{FAINT and} \quad (29)$$

$$\text{DATAMODE} \neq \text{FAINT\_BIAS and} \quad (30)$$

$$\text{DATAMODE} \neq \text{GRADED and} \quad (31)$$

$$\text{DATAMODE} \neq \text{VFAINT,} \quad (32)$$

then `acis_process_events` exits with an error message. Hereafter, the value of this keyword is referred to as `DATAMODEin`.

iii. CONTENT:

If the `infile` does not have an HDU  $h_{in}$  with the keyword

$$\text{CONTENT} = \text{EVT0 or} \quad (33)$$

$$\text{CONTENT} = \text{EVT1 or} \quad (34)$$

$$\text{CONTENT} = \text{TGEVT1 or} \quad (35)$$

$$\text{CONTENT} = \text{EVT2,} \quad (36)$$

then `acis_process_events` exits with an error message. Hereafter, the value of this keyword is referred to as `CONTENTin`.

iv. TIME:

If

$$\text{DATAMODE}_{in} = \text{CC33\_FAINT or} \quad (37)$$

$$\text{DATAMODE}_{in} = \text{CC33\_GRADED} \quad (38)$$

and HDU  $h_{in}$  of the `infile` does not include the column `TIME`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `TIMEin`.

v. TIME\_R0:

If

$$\text{DATAMODE}_{in} = \text{CC33\_FAINT or} \quad (39)$$

$$\text{DATAMODE}_{in} = \text{CC33\_GRADED} \quad (40)$$

and

$$\text{CONTENT}_{in} = \text{EVT1 or} \quad (41)$$

$$\text{CONTENT}_{in} = \text{TGEVT1 or} \quad (42)$$

$$\text{CONTENT}_{in} = \text{EVT2} \quad (43)$$

and HDU  $h_{in}$  of the `infile` does not include the column `TIME_R0`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `TIME_R0in`.

vi. CCD\_ID:

A. If

$$\text{CONTENT}_{in} = \text{EVT0} \quad (44)$$

and HDU  $h_{in}$  of the `infile` does not include the keyword `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this keyword is referred to as `CCD_IDin`.

B. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (45)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (46)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (47)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CCD_ID`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CCD_IDin`.

vii. CCDX:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (48)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CCDX` and does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as `CCDXin` and `CHIPXin`, respectively.

viii. CHIPX:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (49)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (50)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (51)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CHIPX`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CHIPXin`.

ix. CCDY:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (52)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (53)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (54)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (55)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (56)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CCDY` and does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as `CCDYin` and `CHIPYin`, respectively.

x. TROW:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT0} \quad (57)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (58)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (59)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `TROW` and does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, these columns are referred to as `TROWin` and `CHIPYin`, respectively.

xi. CHIPY:

A. If

$$\text{CONTENT}_{\text{in}} = \text{EVT1 or} \quad (60)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 or} \quad (61)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (62)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `CHIPY`, then `acis_process_events` exits with an error message. Hereafter, this column is referred to as `CHIPYin`.

xii. TIMEDEL:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (63)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (64)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the keyword `TIMEDEL`, then `acis_process_events` exits with an error message. Hereafter this keyword is referred to as `TIMEDELin`.

xiii. RA\_TARG, DEC\_TARG, RA\_NOM, DEC\_NOM, RA\_PNT, DEC\_PNT, CHIPY\_TG, and TG\_M:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing} \quad (65)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (66)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (67)$$

then

A. RA\_TARG, DEC\_TARG, RA\_NOM, DEC\_NOM, RA\_PNT, DEC\_PNT:

If HDU  $h_{\text{in}}$  of the `infile` does not include the keywords `RA_TARG`, `DEC_TARG`, `RA_NOM`, `DEC_NOM`, `RA_PNT`, and `DEC_PNT`, then `acis_process_events` exits with an error message. Hereafter these keywords are referred to as `RA_TARGin`, `DEC_TARGin`, `RA_NOMin`, `DEC_NOMin`, `RA_PNTin`, and `DEC_PNTin`, respectively.

B. CHIPY\_TG and TG\_M:

If

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (68)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the columns `CHIPY_TG` and `TG_M`, then `acis_process_events` exits with an error message. Hereafter these columns are referred to as `CHIPY_TGin` and `TG_Min`, respectively.

xiv. TGAINCOR:

If HDU  $h_{\text{in}}$  of the `infile` does not include the keyword `TGAINCOR`, then this keyword is set to zero (i.e. `FALSE`). Hereafter, this keyword is referred to as `TGAINCORin`.

5. stop:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

`stop`  $\neq$  none and (69)

`stop`  $\neq$  chip and (70)

`stop`  $\neq$  tdet and (71)

`stop`  $\neq$  det and (72)

`stop`  $\neq$  tan and (73)

`stop`  $\neq$  sky, (74)

then `stop` is changed to “none” and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:

If

`OBS_MODEin`  $\neq$  pointing and (75)

`stop`  $\neq$  none and (76)

`stop`  $\neq$  chip and (77)

`stop`  $\neq$  tdet, (78)

then `stop` is changed to “tdet” and `acis_process_events` produces a warning message.

iii. `acaofffile`:

If

`OBS_MODEin` = pointing and (79)

`acaofffile` = none and (80)

`stop`  $\neq$  none and (81)

`stop`  $\neq$  chip and (82)

`stop`  $\neq$  tdet, (83)

then `acis_process_events` produces a warning message and `stop` is changed to “none.”

iv. `alignmentfile`:

If

`OBS_MODEin` = pointing and (84)

`alignmentfile` = none and (85)

`stop`  $\neq$  none and (86)

`stop`  $\neq$  chip and (87)

`stop`  $\neq$  tdet, (88)

then `acis_process_events` produces a warning message and `stop` is changed to “none.”

6. `doevtgrade`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

`doevtgrade`  $\neq$  yes and (89)

`doevtgrade`  $\neq$  no, (90)

then `acis_process_events` exits with an error message.



ii. Timed mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (91)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (92)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (93)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (94)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `PHAS`, then `doevtgrade` is changed to “no” and `acis_process_events` produces a warning message.

iii. Continuous clocking mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED or} \quad (95)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \quad (96)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column `PHA_RO`, then `doevtgrade` is changed to “no” and `acis_process_events` produces a warning message.

7. `apply_cti`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{apply\_cti} \neq \text{yes and} \quad (97)$$

$$\text{apply\_cti} \neq \text{no,} \quad (98)$$

then `acis_process_events` exits with an error message.

ii. Timed mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (99)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (100)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (101)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (102)$$

and

$$\text{apply\_cti} = \text{yes} \quad (103)$$

and the `infile` does not include the columns `CCD_ID`, `CHIPX`, `CHIPY`, and `PHAS`, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. Continuous clocking mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED or} \quad (104)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \quad (105)$$

and

$$\text{apply\_cti} = \text{yes} \quad (106)$$

and the `infile` does not include the columns `CCD_ID`, `CHIPX`, `CHIPY`, `PHA_RO`, and `FLTGRADE`, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iv. `doevtgrade`:

If

$$\text{apply\_cti} = \text{yes and} \tag{107}$$
$$\text{doevtgrade} = \text{no}, \tag{108}$$

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

8. `apply_tgain`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{apply\_tgain} \neq \text{yes and} \tag{109}$$
$$\text{apply\_tgain} \neq \text{no}, \tag{110}$$

then `acis_process_events` exits with an error message.

ii. TIME:

If

$$\text{apply\_tgain} = \text{yes} \tag{111}$$

and the `infile` does not include the column TIME, then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

iii. `doevtgrade`:

If

$$\text{apply\_tgain} = \text{yes and} \tag{112}$$
$$\text{doevtgrade} = \text{no}, \tag{113}$$

then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

9. `gradefile`:

(a) Validation:

i. If

$$\text{gradefile} = \text{NONE}, \tag{114}$$

then `gradefile` is changed to “none.”

ii. Existence:

If

$$\text{gradefile} \neq \text{none} \tag{115}$$

and the `gradefile` does not exist, then `gradefile` is changed to “none” and `acis_process_events` produces a warning message.

iii. Permission:

If

$$\text{grade\_file} \neq \text{none} \quad (116)$$

and the file permissions do not allow it to be read, then `grade_file` is changed to “none” and `acis_process_events` produces a warning message.

iv. HDU:

If the `grade_file` does not have an HDU that includes the keyword `CBD10001` and where the keyword includes `DATAMODEin`, then `grade_file` is changed to “none” and `acis_process_events` produces a warning message. Hereafter this HDU is referred to as  $h_{\text{grade}}$ .

v. Columns:

If

$$\text{grade\_file} \neq \text{none} \quad (117)$$

and HDU  $h_{\text{grade}}$  of the `grade_file` does not include the columns `FLTGRADE` and `GRADE`, then `grade_file` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `FLTGRADEgrade` and `GRADEgrade`, respectively.

#### 10. `grade_image_file`:

(a) Validation:

If

$$\text{grade\_image\_file} \neq \text{caldb} \text{ and} \quad (118)$$

$$\text{grade\_image\_file} \neq \text{CALDB} \text{ and} \quad (119)$$

$$\text{apply\_cti} = \text{yes} \quad (120)$$

and

$$\text{DATAMODE} = \text{CC33\_GRADED} \text{ or} \quad (121)$$

$$\text{DATAMODE} = \text{GRADED}, \quad (122)$$

then

i. Existence:

If the `grade_image_file` does not exist, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If the `grade_image_file` exists and the file permissions do not allow it to be read, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. `CONTENT`:

If the `grade_image_file` does not have one or more HDU  $h_{\text{grdimg}}$  with the keyword

$$\text{CONTENT} = \text{GRADED\_CTI}, \quad (123)$$

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iv. Columns:

If HDU  $h_{\text{grdimg}}$  of the `grade_image_file` does not include the columns `FLTGRADE`, `GRDIMG`, and `ESCL`, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

#### 11. `badpixfile`:

(a) Validation:

i. If

$$\text{badpixfile} = \text{NONE}, \quad (124)$$

then `badpixfile` is changed to “none.”

ii. Existence:

If

$$\text{badpixfile} \neq \text{none} \quad (125)$$

and the `badpixfile` does not exist, then `badpixfile` is changed to “none” and `acis-process_events` produces a warning message.

iii. Permission:

If

$$\text{badpixfile} \neq \text{none} \quad (126)$$

and the file permissions do not allow it to be read, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message.

iv. CONTENT:

If

$$\text{badpixfile} \neq \text{none} \quad (127)$$

and the `badpixfile` does not have one or more HDU  $h_{\text{badpix}}$  with the keyword

$$\text{CONTENT} = \text{BADPIX} \text{ or} \quad (128)$$

$$\text{CONTENT} = \text{CDB\_ACIS\_BADPIX}, \quad (129)$$

then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message.

v. Keyword:

If

$$\text{badpixfile} \neq \text{none} \quad (130)$$

and the HDU(s)  $h_{\text{badpix}}$  of the `badpixfile` do not include the keyword `CCD_ID`, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message. Hereafter this keyword is referred to as `CCD_IDbadpix`.

vi. Columns:

If

$$\text{badpixfile} \neq \text{none} \quad (131)$$

and the HDU(s)  $h_{\text{badpix}}$  of the `badpixfile` do not include the columns `CHIPX`, `CHIPY`, `TIME`, `TIME_STOP`, and `STATUS`, then `badpixfile` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `CHIPXbadpix`, `CHIPYbadpix`, `TIMEbadpix`, `TIME_STOPbadpix`, and `STATUSbadpix`, respectively.

12. `ctifile`:

(a) Validation:

If

$$\text{ctifile} \neq \text{caldb}, \quad (132)$$

$$\text{ctifile} \neq \text{CALDB}, \text{ and} \quad (133)$$

$$\text{apply\_cti} = \text{yes}, \quad (134)$$

then

i. Existence:

If the `ctifile` does not exist, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If the `ctifile` exists and the file permissions do not allow it to be read, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iii. CONTENT:

If the `ctifile` does not have one or more HDU  $h_{\text{cti}}$  with the keyword

$$\text{CONTENT} = \text{CDB\_ACIS\_CTI}, \quad (135)$$

then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

iv. Columns:

If HDU  $h_{\text{cti}}$  of the `ctifile` does not include the columns `CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `PHA`, `VOLUME_X`, `VOLUME_Y`, `FRCTRLX`, `FRCTRLY`, `TCTIX`, and `TCTIY`, then `apply_cti` is changed to “no” and `acis_process_events` produces a warning message.

13. `tgainfile`:

(a) Validation:

If

$$\text{tgainfile} \neq \text{caldb}, \quad (136)$$

$$\text{tgainfile} \neq \text{CALDB}, \text{ and} \quad (137)$$

$$\text{apply\_tgain} = \text{yes}, \quad (138)$$

then

i. Existence:

If the `tgainfile` does not exist, then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If the `tgainfile` exists and the file permissions do not allow it to be read, then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

iii. CONTENT:

If the `tgainfile` does not have one or more HDU  $h_{\text{tgain}}$  with the keyword

$$\text{CONTENT} = \text{CDB\_ACIS\_TGAIN}, \quad (139)$$

then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

iv. Columns:

If HDU  $h_{\text{tgain}}$  of the `tgainfile` does not include the columns `CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `NPOINTS`, `PHA`, `DELTPHA1`, and `DELTPHA2`, then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

v. Keywords:

If HDU  $h_{\text{tgain}}$  of the `tgainfile` does not include the keywords EPOCH1 and EPOCH2, then `apply_tgain` is changed to “no” and `acis_process_events` produces a warning message.

14. `mtlfile`:

(a) Lowercase:

If

$$\text{mtlfile} = \text{NONE}, \quad (140)$$

then change `mtlfile` to “none”.

(b) Validation:

If

$$\text{mtlfile} \neq \text{none} \text{ and} \quad (141)$$

$$\text{apply_cti} = \text{yes}, \quad (142)$$

then

i. Existence:

If the `mtlfile` does not exist, then `mtlfile` is changed to “none” and `acis_process_events` produces a warning message.

ii. Permission:

If the `mtlfile` exists and the file permissions do not allow it to be read, then `mtlfile` is changed to “none” and `acis_process_events` produces a warning message.

iii. CONTENT:

If the `mtlfile` does not have one or more HDU  $h_{\text{mtl}}$  with the keyword

$$\text{CONTENT} = \text{mtl}, \quad (143)$$

then `mtlfile` is changed to “none” and `acis_process_events` produces a warning message.

iv. Columns:

If HDU  $h_{\text{mtl}}$  of the `mtlfile` does not include the columns TIME and FP\_TEMP, then `mtlfile` is changed to “none” and `acis_process_events` produces a warning message.

15. `clobber`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{clobber} \neq \text{yes} \text{ and} \quad (144)$$

$$\text{clobber} \neq \text{no}, \quad (145)$$

then `clobber` is changed to “no” and `acis_process_events` produces a warning message.

ii. Permission:

If

$$\text{clobber} = \text{yes} \quad (146)$$

and the `outfile` exists and the file permissions of the `outfile` do not allow it to be overwritten, then `acis_process_events` exits with an error message.

iii. Don't overwrite:

If

$$\text{clobber} = \text{no} \quad (147)$$

and the `outfile` exists, then `acis_process_events` exits with an error message.

16. `pix_adj`:

(a) Lowercase:

The parameter string is converted to contain only lower case letters.

(b) Validation:

i. Setting:

If

$$\text{pix\_adj} \neq \text{centroid and} \quad (148)$$
$$\text{pix\_adj} \neq \text{edser and} \quad (149)$$
$$\text{pix\_adj} \neq \text{none and} \quad (150)$$
$$\text{pix\_adj} \neq \text{randomize,} \quad (151)$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

ii. `OBS_MODE`:

If

$$\text{OBS\_MODE}_{\text{in}} \neq \text{pointing and} \quad (152)$$
$$\text{pix\_adj} \neq \text{none,} \quad (153)$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iii. `acaofffile`:

If

$$\text{pix\_adj} \neq \text{none} \quad (154)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (155)$$
$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (156)$$

and

$$\text{acaofffile} = \text{none,} \quad (157)$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

iv. `alignmentfile`:

If

$$\text{pix\_adj} \neq \text{none} \quad (158)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (159)$$
$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (160)$$

and

$$\text{alignmentfile} = \text{none,} \quad (161)$$

then `pix_adj` is changed to "none" and `acis_process_events` produces a warning message.

v. stop:

If

$$\text{pix\_adj} = \text{centroid or} \quad (162)$$

$$\text{pix\_adj} = \text{edser or} \quad (163)$$

$$\text{pix\_adj} = \text{randomize} \quad (164)$$

and

$$\text{stop} \neq \text{sky}, \quad (165)$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

vi. PHAS:

If

$$\text{pix\_adj} = \text{centroid} \quad (166)$$

and the `infile` does not include the column PHAS, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

vii. FLTGRADE:

If

$$\text{pix\_adj} = \text{edser} \quad (167)$$

and

$$\text{DATAMODE} = \text{CC33\_GRADED or} \quad (168)$$

$$\text{DATAMODE} = \text{GRADED} \quad (169)$$

and the `infile` does not include the column FLTGRADE, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

17. `subpixfile`:

(a) If

$$\text{pix\_adj} = \text{edser}, \quad (170)$$

then

i. Existence:

If the `subpixfile` does not exist, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

ii. Permission:

If the `subpixfile` exists and the file permissions do not allow it to be read, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

iii. Validation:

A. CONTENT:

If the `subpixfile` does not have one or more HDU  $h_{\text{subpix}}$  with the keyword

$$\text{CONTENT} = \text{AXAF\_SUBPIX}, \quad (171)$$

then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.



B. Keyword:

If the HDUs  $h_{\text{subpix}}$  of the `subpixfile` do not include the keyword `CCD_ID`, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message.

C. Columns:

If the HDUs  $h_{\text{subpix}}$  of the `subpixfile` do not include binary tables with the columns `FLTGRADE`, `NPOINTS`, `ENERGY`, `CHIPX_OFFSET`, and `CHIPY_OFFSET`, then `pix_adj` is changed to “none” and `acis_process_events` produces a warning message. Hereafter these columns are referred to as `FLTGRADEsubpix`, `NPOINTSsubpix`, `ENERGYsubpix`, `CHIPX_OFFSETsubpix`, and `CHIPY_OFFSETsubpix`, respectively.

### 1.5.2 Initializations

1. Focal-point CCD:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing} \quad (172)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (173)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (174)$$

then the values of `RA_PNTin` and `DEC_PNTin` are used to determine the `CCD_ID` associated with the focal point. Hereafter this value is referred to as `CCD_IDfocus`.\*

2. `TIMEmin` and `TIMEmax`:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing} \text{ and} \quad (175)$$

$$\text{acaofffile} \neq \text{none} \text{ and} \quad (176)$$

$$\text{alignmentfile} \neq \text{none}, \quad (177)$$

then the `acaofffile` data are processed to determine the earliest and latest times for which there is aspect information:

$$\text{TIME}_{\text{min}} = \min(\text{TIME}_{\text{acaoff}}) \text{ and} \quad (178)$$

$$\text{TIME}_{\text{max}} = \max(\text{TIME}_{\text{acaoff}}). \quad (179)$$

3. `CHIPX_TARGacaoff,med`, `CHIPY_TARGacaoff,med`:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing} \quad (180)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (181)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (182)$$

and

$$\text{acaofffile} \neq \text{none} \text{ and} \quad (183)$$

$$\text{alignmentfile} \neq \text{none}, \quad (184)$$

---

\*The focal point is the location associated with the optical axis in the absence of dither. This location should not be confused with the aim point, which is the location illuminated by an undithered point source provided that the source is not offset from the target location.

then the values of  $\text{CHIPX\_TARG}_{\text{acaoff}}$  and  $\text{CHIPY\_TARG}_{\text{acaoff}}$  are computed from the values of  $\text{RA\_TARG}$  and  $\text{DEC\_TARG}$  using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) and the TIMES in the `acaofffile`. The values of  $\text{CHIPX\_TARG}_{\text{acaoff}}$  and  $\text{CHIPY\_TARG}_{\text{acaoff}}$  are processed to obtain the median values:

$$\text{CHIPX\_TARG}_{\text{acaoff,med}} = \text{median}(\text{CHIPX\_TARG}_{\text{acaoff}}) \text{ and} \quad (185)$$

$$\text{CHIPY\_TARG}_{\text{acaoff,med}} = \text{median}(\text{CHIPY\_TARG}_{\text{acaoff}}). \quad (186)$$

### 1.5.3 Loop over events

The following steps are performed, in sequence, for each event.

#### 1. STATUS:

##### (a) Exists:

If HDU  $h_{\text{in}}$  of the `infile` includes a 32-bit column named `STATUS`, then

- i. The values of the bits for an event are read from the `infile`.
- ii. The value of `STATUS[k]` is set to zero for bits  $k = 1-5, 14, 16-19, \text{ and } 23$  (of 0-31), bits that can be set by `acis_process_events`.
- iii. If

$$\text{doevtgrade} = \text{yes}, \quad (187)$$

then the value of `STATUS[20]`, the other bit that can be set by `acis_process_events`, is set to zero.

##### (b) Does not exist:

If HDU  $h_{\text{in}}$  does not include a 32-bit column named `STATUS`, then

- i. A set of 32 bits are allocated for the event.
- ii. The values of the 32 bits are initialized to zero.

#### 2. EXPNO:

##### (a) Read:

- i. If HDU  $h_{\text{in}}$  of the `infile` includes the `EXPNO`, hereafter referred to as `EXPNOin`, then

$$\text{EXPNO} = \text{EXPNO}_{\text{in}}. \quad (188)$$

- ii. If HDU  $h_{\text{in}}$  of the `infile` does not include the `EXPNO`, then

$$\text{EXPNO} = \text{NULL}. \quad (189)$$

##### (b) Validation:

If

$$\text{EXPNO} \neq \text{NULL} \quad (190)$$

and

$$\text{EXPNO} < 0 \text{ or} \quad (191)$$

$$\text{EXPNO} \geq 10^8, \quad (192)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which equation 190 and either equation 191 or 192 is true. These conditions should not occur.

3. CCD\_ID:

(a) Read:  
The value of CCD\_ID for an event is given by  $CCD\_ID_{in}$ .

(b) Validation:  
If

$$CCD\_ID < 0 \text{ or} \tag{193}$$

$$CCD\_ID > 9, \tag{194}$$

then `acis_process_events` exits with an error message because CCD\_ID-dependent computations could fail if the value of CCD\_ID is unphysical.

4. CHIPX:

(a) Read:  
i. If the `infile` includes the column CHIPX, then the value of CHIPX for an event is given by

$$CHIPX = CHIPX_{in}. \tag{195}$$

ii. If the `infile` does not include the column CHIPX, then the value of CHIPX for an event is given by

$$CHIPX = CCDX_{in} + 1. \tag{196}$$

5. CHIPX\_ADJ:

(a) Initialize:

$$CHIPX\_ADJ = CHIPX. \tag{197}$$

(b) Validation:

i. Unphysical:  
If

$$CHIPX\_ADJ < 1, \tag{198}$$

then

$$CHIPX\_ADJ = 1. \tag{199}$$

If

$$CHIPX\_ADJ > 1024, \tag{200}$$

then

$$CHIPX\_ADJ = 1024. \tag{201}$$

ii. Unexpected:  
If

$$CHIPX\_ADJ = 1 \text{ or} \tag{202}$$

$$CHIPX\_ADJ = 1024, \tag{203}$$

then `acis_process_events` sets STATUS bit 0 (of 0–31) to one and increments a counter for the number of unexpected CHIPX values. These values should not occur.

6. NODE\_ID:

(a) Calculate:

The NODE\_ID of an event is given by

$$\text{NODE\_ID} = \text{int} \left( \frac{\text{CHIPX\_ADJ} - 1}{256} \right), \quad (204)$$

where “int” means the integer portion of (i.e. truncate or round down) the quantity in parentheses.

7. CHIPY:

(a) Read:

i. If the `infile` includes the column `CHIPY`, then the value of `CHIPY` for an event is given by

$$\text{CHIPY} = \text{CHIPY}_{\text{in}}. \quad (205)$$

ii. If the `infile` does not include the column `CHIPY` and

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (206)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (207)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED} \text{ or} \quad (208)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (209)$$

then the value of `CHIPY` for an event is given by

$$\text{CHIPY} = \text{CCDY}_{\text{in}} + 1. \quad (210)$$

iii. If the `infile` does not include the column `CHIPY` and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (211)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (212)$$

then the value of `CHIPY` for an event is given by

$$\text{CHIPY} = \text{TROW}_{\text{in}} + 1. \quad (213)$$

8. CHIPY\_ADJ:

(a) Initialize:

$$\text{CHIPY\_ADJ} = \text{CHIPY}. \quad (214)$$

(b) Validation:

i. Unphysical:

A. Minimum:

If

$$\text{CHIPY\_ADJ} < 1, \quad (215)$$

then

$$\text{CHIPY\_ADJ} = 1 \quad (216)$$

and `acis_process_events` sets `STATUS` bit 0 (of 0–31) to one and increments a counter for the number of unexpected `CHIPY` values. These values should not occur.

B. Timed exposure mode maximum:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (217)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (218)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (219)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (220)$$

and

$$\text{CHIPY\_ADJ} > 1024, \quad (221)$$

then

$$\text{CHIPY\_ADJ} = 1024 \quad (222)$$

and `acis_process_events` sets STATUS bit 0 (of 0–31) to one and increments a counter for the number of unexpected CHIPY values. These values should not occur.

C. Continuous-clocking mode maximum:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (223)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (224)$$

and

$$\text{CHIPY\_ADJ} > 512, \quad (225)$$

then

$$\text{CHIPY\_ADJ} = 512 \quad (226)$$

and `acis_process_events` sets STATUS bit 0 (of 0–31) to one and increments a counter for the number of unexpected CHIPY values. These values should not occur.

ii. Unexpected:

A. VFAINT:

If

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT} \quad (227)$$

and

$$\text{CHIPY\_ADJ} = 2 \text{ or} \quad (228)$$

$$\text{CHIPY\_ADJ} = 1023, \quad (229)$$

then `acis_process_events` sets STATUS bit 0 (of 0–31) to one and increments a counter for the number of unexpected CHIPY values. These values should not occur.

9. TIME\_RO:

(a) Timed exposure mode:

If

$$\text{DATAMODE} = \text{FAINT or} \quad (230)$$

$$\text{DATAMODE} = \text{FAINT\_BIAS or} \quad (231)$$

$$\text{DATAMODE} = \text{GRADED or} \quad (232)$$

$$\text{DATAMODE} = \text{VFAINT}, \quad (233)$$

then

$$\text{TIME\_RO} = \text{NaN}. \quad (234)$$

(b) Continuous-clocking mode:  
If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (235)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (236)$$

then

i. Read:

A. Level 0:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT0}, \quad (237)$$

then the value of  $\text{TIME\_RO}$  for an event is given by  $\text{TIME}_{\text{in}}$ .

B. Level 1, 1.5, or 2:

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \text{ or} \quad (238)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ or} \quad (239)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (240)$$

and

$$\text{TIME\_RO}_{\text{in}} > 0, \quad (241)$$

then

$$\text{TIME\_RO} = \text{TIME\_RO}_{\text{in}}. \quad (242)$$

If

$$\text{CONTENT}_{\text{in}} = \text{EVT1} \text{ or} \quad (243)$$

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ or} \quad (244)$$

$$\text{CONTENT}_{\text{in}} = \text{EVT2} \quad (245)$$

and

$$\text{TIME\_RO}_{\text{in}} = 0, \quad (246)$$

then

$$\text{TIME\_RO} = \text{TIME}_{\text{in}}. \quad (247)$$

ii. Validation:

If

$$\text{TIME\_RO} < 0 \text{ or} \quad (248)$$

$$\text{TIME\_RO} \geq 3 \times 10^9, \quad (249)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which either equation 248 or 249 is true. These conditions should not occur.

10.  $\text{CHIPX\_TARG}_{\text{evt}}$ ,  $\text{CHIPY\_TARG}_{\text{evt}}$ , and  $\text{CHIPY\_TARG}_{\text{eff}}$ :

The coordinate  $\text{CHIPY\_TARG}_{\text{eff}}$  is used to compute the coordinates X, Y, and SKY\_1D.

(a) Approximate:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (250)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (251)$$

and

$$\text{acaofffile} \neq \text{none}, \quad (252)$$

then:

i. Initial values:

The values of  $\text{CHIPX\_TARG}_{\text{evt}}$  and  $\text{CHIPY\_TARG}_{\text{evt}}$  are computed from the values of  $\text{RA\_TARG}$  and  $\text{DEC\_TARG}$  using the value of  $\text{CCD\_ID}_{\text{focus}}$  and using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time given by  $\text{TIME\_RO} - (\text{CHIPY\_TARG}_{\text{acaoff,med}} + 1028) \times \text{TIMEDEL}$ . The value of  $\text{CHIPY\_TARG}_{\text{evt}}$  can be negative.

ii. ACIS-I0 or -I2:

If

$$\text{CCD\_ID}_{\text{focus}} = 0 \text{ or} \quad (253)$$

$$\text{CCD\_ID}_{\text{focus}} = 2, \quad (254)$$

then

A. If

$$\text{CCD\_ID} = 0 \text{ or} \quad (255)$$

$$\text{CCD\_ID} = 2, \quad (256)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = \text{CHIPY\_TARG}_{\text{evt}}. \quad (257)$$

B. If

$$\text{CCD\_ID} = 1 \text{ or} \quad (258)$$

$$\text{CCD\_ID} = 3, \quad (259)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPY\_TARG}_{\text{evt}} - \text{CHIPY\_TARG}_{\text{acaoff,med}}). \quad (260)$$

C. If

$$\text{CCD\_ID} \geq 4, \quad (261)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (262)$$

iii. ACIS-I1 or -I3:

If

$$\text{CCD\_ID}_{\text{focus}} = 1 \text{ or} \quad (263)$$

$$\text{CCD\_ID}_{\text{focus}} = 3, \quad (264)$$

then

A. If

$$\text{CCD\_ID} = 0 \text{ or} \quad (265)$$

$$\text{CCD\_ID} = 2, \quad (266)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPY\_TARG}_{\text{evt}} - \text{CHIPY\_TARG}_{\text{acaoff,med}}). \quad (267)$$

B. If

$$\text{CCD\_ID} = 1 \text{ or} \quad (268)$$

$$\text{CCD\_ID} = 3, \quad (269)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = \text{CHIPY\_TARG}_{\text{evt}}. \quad (270)$$

C. If

$$\text{CCD\_ID} \geq 4, \quad (271)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 + (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (272)$$

iv. ACIS-S:

If

$$\text{CCD\_ID}_{\text{focus}} \geq 4, \quad (273)$$

then

A. If

$$\text{CCD\_ID} = 0 \text{ or} \quad (274)$$

$$\text{CCD\_ID} = 2, \quad (275)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 + (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (276)$$

B. If

$$\text{CCD\_ID} = 1 \text{ or} \quad (277)$$

$$\text{CCD\_ID} = 3, \quad (278)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = 512 - (\text{CHIPX\_TARG}_{\text{evt}} - \text{CHIPX\_TARG}_{\text{acaoff,med}}). \quad (279)$$



C. If

$$\text{CCD\_ID} \geq 4, \quad (280)$$

then

$$\text{CHIPY\_TARG}_{\text{eff}} = \text{CHIPY\_TARG}_{\text{evt}}. \quad (281)$$

(b) Validation:

If

$$\text{CHIPY\_TARG}_{\text{eff}} < -256 \text{ or} \quad (282)$$

$$\text{CHIPY\_TARG}_{\text{eff}} \geq 1280, \quad (283)$$

then `acis_process_events` produces a warning message.

#### 11. TG\_M:

(a) Continuous-clocking mode with gratings:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing} \quad (284)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (285)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (286)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (287)$$

then

i. Read:

The value of TG\_M for an event is given by  $\text{TG\_M}_{\text{in}}$ .

ii. Validation:

A. If

$$\text{TG\_M} < -99, \quad (288)$$

then

$$\text{TG\_M} = -99 \quad (289)$$

and `acis_process_events` produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

B. If

$$\text{TG\_M} > 99, \quad (290)$$

then

$$\text{TG\_M} = 99 \quad (291)$$

and `acis_process_events` produces a warning upon completion with a count of the total number of events for which this condition is true. These values should not occur.

12. CHIPY\_TG:

(a) Continuous-clocking mode with gratings:

If

$$\text{OBS\_MODE}_{\text{in}} = \text{pointing} \quad (292)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (293)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (294)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1}, \quad (295)$$

then

i. Read:

The value of CHIPY\_TG for an event is given by  $\text{CHIPY\_TG}_{\text{in}}$ .

ii. Validation:

A. If

$$\text{TG\_M} > -99 \text{ and} \quad (296)$$

$$\text{TG\_M} < 99 \text{ and} \quad (297)$$

$$\text{CHIPY\_TG} \neq \text{NaN} \quad (298)$$

and

$$\text{CHIPY\_TG} \leq 0 \text{ or} \quad (299)$$

$$\text{CHIPY\_TG} \geq 1025, \quad (300)$$

then `acis_process_events` exits with an error message because CHIPY\_TG-dependent computations could fail if the value of CHIPY\_TG is unphysical.

B. If

$$\text{TG\_M} > -99 \text{ and} \quad (301)$$

$$\text{TG\_M} < 99 \text{ and} \quad (302)$$

$$\text{CHIPY\_TG} \neq \text{NaN} \text{ and} \quad (303)$$

$$\text{CHIPY\_TG} < 1, \quad (304)$$

then

$$\text{CHIPY\_TG} = 1. \quad (305)$$

C. If

$$\text{TG\_M} > -99 \text{ and} \quad (306)$$

$$\text{TG\_M} < 99 \text{ and} \quad (307)$$

$$\text{CHIPY\_TG} \neq \text{NaN} \text{ and} \quad (308)$$

$$\text{CHIPY\_TG} > 1024, \quad (309)$$

then

$$\text{CHIPY\_TG} = 1024. \quad (310)$$

13. TIME and CHIPY\_ADJ:

For continuous-clocking mode observations, the value of CHIPY\_ADJ is used to compute the TIME, pulse heights, and the coordinates TDETX, TDETY, DETX, and DETY.

(a) Calculate:

i. Timed exposure mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (311)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (312)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (313)$$

$$\text{DATAMODE}_{\text{in}} = \text{VF AINT,} \quad (314)$$

then

$$\text{TIME} = \text{TIME}_{\text{in}}. \quad (315)$$

ii. Continuous-clocking mode:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (316)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (317)$$

then

A. Set

$$\text{CHIPY\_ADJ} = 512 \text{ and} \quad (318)$$

$$\text{TIME}' = \text{TIME\_RO} - (\text{CHIPY\_ADJ} + 1028) \times \text{TIMEDEL}. \quad (319)$$

B. If

$$\text{acaofffile} \neq \text{none,} \quad (320)$$

then

$$\text{CHIPY\_ADJ}' = \text{CHIPY\_TARG}_{\text{eff}} \text{ and} \quad (321)$$

$$\text{TIME}' = \text{TIME\_RO} - (\text{CHIPY\_ADJ}' + 1028) \times \text{TIMEDEL}, \quad (322)$$

and CHIPY\_ADJ is computed from the values of RA\_TARG and DEC\_TARG using the orientation of the telescope (i.e. RA, DEC, and ROLL) and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME'. At this step, the value of CHIPY\_ADJ can be negative.

C. If

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 and} \quad (323)$$

$$\text{TG\_M} > -99 \text{ and} \quad (324)$$

$$\text{TG\_M} < 99 \text{ and} \quad (325)$$

$$\text{CHIPY\_TG} \neq \text{NaN,} \quad (326)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TG}. \quad (327)$$

D. If

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \quad (328)$$

and

$$\text{TG\_M} = -99 \text{ or} \quad (329)$$

$$\text{TG\_M} = 99, \quad (330)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (331)$$

E. If

$$\text{acaofffile} \neq \text{none} \quad (332)$$

and

$$\text{TIME}' < \text{TIME}_{\text{min}} \text{ or} \quad (333)$$

$$\text{TIME}' \geq \text{TIME}_{\text{max}}, \quad (334)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (335)$$

F. If

$$\text{acaofffile} \neq \text{none} \quad (336)$$

and

$$\text{TIME}' < \text{TIME}_{\text{min}} \text{ or} \quad (337)$$

$$\text{TIME}' \geq \text{TIME}_{\text{max}}, \quad (338)$$

and

$$\text{CCD\_ID}_{\text{focus}} = 0 \text{ or} \quad (339)$$

$$\text{CCD\_ID}_{\text{focus}} = 2 \quad (340)$$

and

$$\text{CCD\_ID} = 0 \text{ or} \quad (341)$$

$$\text{CCD\_ID} = 2, \quad (342)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TARG}_{\text{acaoff,med.}} \quad (343)$$

G. If

$$\text{acaofffile} \neq \text{none} \quad (344)$$

and

$$\text{TIME}' < \text{TIME}_{\text{min}} \text{ or} \quad (345)$$

$$\text{TIME}' \geq \text{TIME}_{\text{max}}, \quad (346)$$

and

$$\text{CCD\_ID}_{\text{focus}} = 1 \text{ or} \quad (347)$$

$$\text{CCD\_ID}_{\text{focus}} = 3 \quad (348)$$

and

$$\text{CCD\_ID} = 1 \text{ or} \quad (349)$$

$$\text{CCD\_ID} = 3, \quad (350)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TARG}_{\text{acaoff,med}}. \quad (351)$$

H. If

$$\text{acaofffile} \neq \text{none} \quad (352)$$

and

$$\text{TIME}' < \text{TIME}_{\text{min}} \text{ or} \quad (353)$$

$$\text{TIME}' \geq \text{TIME}_{\text{max}}, \quad (354)$$

and

$$\text{CCD\_ID}_{\text{focus}} \geq 4 \text{ and} \quad (355)$$

$$\text{CCD\_ID} \geq 4, \quad (356)$$

then

$$\text{CHIPY\_ADJ} = \text{CHIPY\_TARG}_{\text{acaoff,med}}. \quad (357)$$

I. If

$$\text{acaofffile} = \text{none} \quad (358)$$

and

$$\text{CONTENT}_{\text{in}} \neq \text{TGEVT1}, \quad (359)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (360)$$

J. If

$$\text{CCD\_ID}_{\text{focus}} \leq 3 \text{ and} \quad (361)$$

$$\text{CCD\_ID} \geq 4, \quad (362)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (363)$$

K. If

$$\text{CCD\_ID}_{\text{focus}} \geq 4 \text{ and} \quad (364)$$

$$\text{CCD\_ID} \leq 3, \quad (365)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (366)$$

L. If

$$\text{OBS\_MODE}_{\text{in}} = \text{secondary}, \quad (367)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (368)$$

M. If

$$\text{CHIPY\_ADJ} < 0.5 \text{ or} \quad (369)$$

$$\text{CHIPY\_ADJ} \geq 1024.5 \quad (370)$$

then

$$\text{CHIPY\_ADJ} = 512. \quad (371)$$

N. Set

$$\text{TIME} = \text{TIME\_RO} - (\text{CHIPY\_ADJ} + 1028) \times \text{TIMEDEL}. \quad (372)$$

In continuous-clocking mode, the coordinate `CHIPY_ADJ` is used to compute the time, the pulse heights, and the coordinates (except for X, Y, and `SKY_1D`).

(b) Validation:

i. If

$$\text{TIME} < 0 \text{ or} \quad (373)$$

$$\text{TIME} \geq 3 \times 10^9, \quad (374)$$

then `acis_process_events` produces a warning upon completion with a count of the total number of events for which one or the other of these conditions is true. These values should not occur.

ii. If

$$\text{CHIPY\_ADJ} < 0.5 \text{ or} \quad (375)$$

$$\text{CHIPY\_ADJ} \geq 1024.5, \quad (376)$$

then `acis_process_events` exits with an error message because `CHIPY_ADJ`-dependent computations could fail if the value of `CHIPY_ADJ` is unphysical.

14. Bad pixel:

(a) If

$$\text{badpixfile} \neq \text{none} \quad (377)$$

and the `badpixfile` includes a valid HDU  $h_{\text{badpix}}$  where  $\text{CCD\_ID}_{\text{badpix}} = \text{CCD\_ID}$ , then the HDU  $h_{\text{badpix}}$  is searched as follows to determine if the event should have one or more `STATUS` bits set to one.

i. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more row  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (378)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (379)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (380)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (381)$$

and

$$\text{STATUS}_{\text{badpix},r}[5] = 1 \text{ or} \quad (382)$$

$$\text{STATUS}_{\text{badpix},r}[6] = 1 \text{ or} \quad (383)$$

$$\text{STATUS}_{\text{badpix},r}[9] = 1, \quad (384)$$

then

$$\text{STATUS}[0] = 1 \quad (385)$$

for the event. Here  $\text{CCD\_ID}_{\text{badpix}}$  is the value of the keyword `CCD_ID` in HDU  $h_{\text{badpix}}$  of the `badpixfile`,  $\text{CHIPX}_{\text{badpix},r}[0]$  and  $\text{CHIPX}_{\text{badpix},r}[1]$  are the first and second values in the vector column named `CHIPX` of row  $r$  of HDU  $h_{\text{badpix}}$  of the `badpixfile`, and  $\text{TIME}_{\text{badpix},r}$  and  $\text{TIME\_STOP}_{\text{badpix},r}$  are the values in the columns named `TIME` and `TIME_STOP`, respectively, of row  $r$  of HDU  $h_{\text{badpix}}$  of the `badpixfile`.

- ii. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more row  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (386)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (387)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (388)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (389)$$

and

$$\text{STATUS}_{\text{badpix},r}[0] = 1 \text{ or} \quad (390)$$

$$\text{STATUS}_{\text{badpix},r}[1] = 1 \text{ or} \quad (391)$$

$$\text{STATUS}_{\text{badpix},r}[7] = 1 \text{ or} \quad (392)$$

$$\text{STATUS}_{\text{badpix},r}[11] = 1 \text{ or} \quad (393)$$

$$\text{STATUS}_{\text{badpix},r}[12] = 1 \text{ or} \quad (394)$$

$$\text{STATUS}_{\text{badpix},r}[13] = 1 \text{ or} \quad (395)$$

$$\text{STATUS}_{\text{badpix},r}[14] = 1 \text{ or} \quad (396)$$

$$\text{STATUS}_{\text{badpix},r}[16] = 1, \quad (397)$$

then

$$\text{STATUS}[4] = 1 \quad (398)$$

for the event.

- iii. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more row  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (399)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (400)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (401)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (402)$$

and

$$\text{STATUS}_{\text{badpix},r}[8] = 1 \text{ or} \quad (403)$$

$$\text{STATUS}_{\text{badpix},r}[10] = 1, \quad (404)$$

then

$$\text{STATUS}[5] = 1 \quad (405)$$

for the event.

- iv. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more row  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (406)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (407)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (408)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (409)$$

and

$$\text{STATUS}_{\text{badpix},r}[3] = 1, \quad (410)$$

then

$$\text{STATUS}[6] = 1 \quad (411)$$

for the event.

- v. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more row  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (412)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (413)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (414)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (415)$$

and

$$\text{STATUS}_{\text{badpix},r}[2] = 1 \text{ or} \quad (416)$$

$$\text{STATUS}_{\text{badpix},r}[4] = 1, \quad (417)$$

then

$$\text{STATUS}[8] = 1 \quad (418)$$

for the event.

- vi. If  $\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT}$  or  $\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}$  and there are one or more row  $r$  in HDU  $h_{\text{badpix}}$  where

$$\text{CHIPX} \geq \text{CHIPX}_{\text{badpix},r}[0] \text{ and} \quad (419)$$

$$\text{CHIPX} \leq \text{CHIPX}_{\text{badpix},r}[1] \text{ and} \quad (420)$$

$$\text{TIME} \geq \text{TIME}_{\text{badpix},r} \text{ and} \quad (421)$$

$$\text{TIME} < \text{TIME\_STOP}_{\text{badpix},r} \quad (422)$$

and

$$\text{STATUS}_{\text{badpix},r}[15] = 1, \quad (423)$$

then

$$\text{STATUS}[16] = 1 \quad (424)$$

for the event.

- vii. In summary, the mapping between a bad-pixel STATUS bit and the corresponding event STATUS bit is listed in Table 1.

15. PHAS:



Table 1: Bad-pixel to event STATUS bit mapping

Bad-pixel STATUS bit	Event STATUS bit
0	4
1	4
2	8
3	6
4	8
5	0
6	0
7	4
8	5
9	0
10	5
11	4
12	4
13	4
14	4
15	16
16	4

- (a) If HDU 1 of the `infile` includes the column PHAS, then
- i. the values of PHAS for an event are read from the `infile`.
  - ii. If  $\text{PHAS}[4] < \text{split threshold}$ , then  $\text{STATUS}[k] = 1$  for bit  $k = 1$  (of 0–31).
  - iii. If  $\text{PHAS}[4] < \text{PHAS}[j]$  for one or more  $j = 0-3$ , then  $\text{STATUS}[k] = 1$  for bit  $k = 1$ .
  - iv. If  $\text{PHAS}[4] \leq \text{PHAS}[j]$  for one or more  $j = 5-8$ , then  $\text{STATUS}[k] = 1$  for bit  $k = 1$ .
  - v. If  $\text{PHAS}[j] > 4095$  for one or more  $j = 0-8$ , then  $\text{STATUS}[k] = 1$  for bit  $k = 2$ .

16. FLTGRADE\_RO:

- (a) If HDU  $h_{\text{in}}$  of the `infile` includes the column PHAS and

$$\text{doevtgrade} = \text{yes}, \tag{425}$$

then

$$\text{FLTGRADE\_RO} = c_{\text{fro}}[0] + 2c_{\text{fro}}[1] + 4c_{\text{fro}}[2] + 8c_{\text{fro}}[3] + \tag{426}$$

$$16c_{\text{fro}}[5] + 32c_{\text{fro}}[6] + 64c_{\text{fro}}[7] + 128c_{\text{fro}}[8]. \tag{427}$$

The values of  $c_{\text{fro}}[j]$  are determined as follows.

- i. Each value of  $c_{\text{fro}}[j]$  is initialized such that

$$c_{\text{fro}}[j] = 1. \tag{428}$$

- ii. If

$$\text{PHAS}[j] < \text{split threshold or} \tag{429}$$

$$\text{PHAS}[j] > 4095, \tag{430}$$

then

$$c_{\text{fro}}[j] = 0. \tag{431}$$

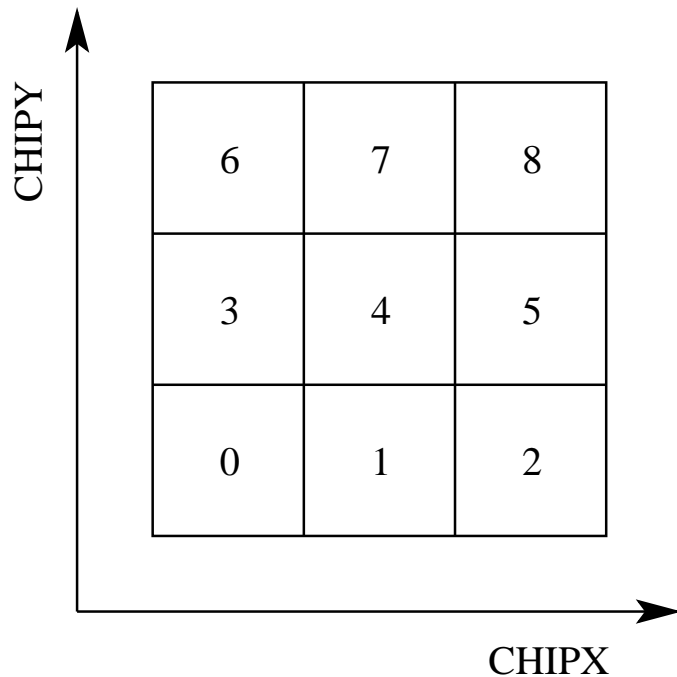


Figure 1: The relative CHIPX and CHIPY coordinates of the nine elements  $j = 0-8$  of a 3 pixel  $\times$  3 pixel event island PHAS[ $j$ ] or PHAS\_ADJ[ $j$ ].

iii. If

$$j \geq 0 \text{ and} \tag{432}$$

$$j \leq 3 \text{ and} \tag{433}$$

$$\text{PHAS}[j] > \text{PHAS}[4], \tag{434}$$

then

$$c_{\text{fro}}[j] = 0. \tag{435}$$

iv. If

$$j \geq 5 \text{ and} \tag{436}$$

$$j \leq 8 \text{ and} \tag{437}$$

$$\text{PHAS}[j] \geq \text{PHAS}[4], \tag{438}$$

then

$$c_{\text{fro}}[j] = 0. \tag{439}$$

The elements  $j = 0-8$  of PHAS are depicted in Figure 1.

(b) If HDU  $h_{\text{in}}$  of the `infile` does not include the column PHAS or

$$\text{doevtgrade} = \text{no}, \tag{440}$$

then

$$\text{FLTGRADE\_RO} = \text{NULL}. \tag{441}$$

17. GRADE\_RO:

(a) If

$$\text{FLTGRADE\_RO} \neq \text{NULL and} \quad (442)$$

$$\text{gradefile} \neq \text{none and} \quad (443)$$

HDU  $h_{\text{grade}}$  of the `gradefile` has a row  $r$ , where

$$\text{FLTGRADE}_{\text{grade}}[r] = \text{FLTGRADE\_RO}, \quad (444)$$

then

$$\text{GRADE\_RO} = \text{GRADE}_{\text{grade}}[r]. \quad (445)$$

(b) If

$$\text{FLTGRADE\_RO} = \text{NULL or} \quad (446)$$

$$\text{gradefile} = \text{none or} \quad (447)$$

HDU  $h_{\text{grade}}$  of the `gradefile` does not have a row  $r$ , where

$$\text{FLTGRADE}_{\text{grade}}[r] = \text{FLTGRADE\_RO}, \quad (448)$$

then

$$\text{GRADE\_RO} = \text{NULL}. \quad (449)$$

18. PHA\_RO:

(a) If HDU  $h_{\text{in}}$  of the `infile` includes the column `PHAS` and

$$\text{doevtgrade} = \text{yes and} \quad (450)$$

$$\text{GRADE\_RO} \neq \text{NULL}, \quad (451)$$

then

$$\text{PHA\_RO} = \sum_{j=0}^8 c_{\text{pro}}[j] \text{PHAS}[j]. \quad (452)$$

The values of  $c_{\text{pro}}[j]$  are determined as follows.

i. Each value of  $c_{\text{pro}}[j]$  is initialized such that

$$c_{\text{pro}}[j] = 1. \quad (453)$$

ii. If

$$\text{PHAS}[j] < \text{split threshold}, \quad (454)$$

then

$$c_{\text{pro}}[j] = 0. \quad (455)$$

iii. If

$$j \geq 0 \text{ and} \tag{456}$$

$$j \leq 3 \text{ and} \tag{457}$$

$$\text{PHAS}[j] > \text{PHAS}[4], \tag{458}$$

then

$$c_{\text{pro}}[j] = 0. \tag{459}$$

iv. If

$$j \geq 5 \text{ and} \tag{460}$$

$$j \leq 8 \text{ and} \tag{461}$$

$$\text{PHAS}[j] \geq \text{PHAS}[4], \tag{462}$$

then

$$c_{\text{pro}}[j] = 0. \tag{463}$$

v. If

$$\text{CORNERS} = -1, \tag{464}$$

then

$$c_{\text{pro}}[0] = 0 \text{ and} \tag{465}$$

$$c_{\text{pro}}[2] = 0 \text{ and} \tag{466}$$

$$c_{\text{pro}}[6] = 0 \text{ and} \tag{467}$$

$$c_{\text{pro}}[8] = 0. \tag{468}$$

vi. If

$$\text{CORNERS} = 0, \tag{469}$$

then there are no additional constraints on  $c_{\text{pro}}[0]$ ,  $c_{\text{pro}}[2]$ ,  $c_{\text{pro}}[6]$ , and  $c_{\text{pro}}[8]$ .

vii. If

$$\text{CORNERS} = 1, \tag{470}$$

then

A. If

$$c_{\text{pro}}[1] = 0 \text{ and} \tag{471}$$

$$c_{\text{pro}}[3] = 0, \tag{472}$$

then

$$c_{\text{pro}}[0] = 0. \tag{473}$$

B. If

$$c_{\text{pro}}[1] = 0 \text{ and} \tag{474}$$

$$c_{\text{pro}}[5] = 0, \tag{475}$$

then

$$c_{\text{pro}}[2] = 0. \tag{476}$$

C. If

$$c_{\text{pro}}[3] = 0 \text{ and} \quad (477)$$

$$c_{\text{pro}}[7] = 0, \quad (478)$$

then

$$c_{\text{pro}}[6] = 0. \quad (479)$$

D. If

$$c_{\text{pro}}[5] = 0 \text{ and} \quad (480)$$

$$c_{\text{pro}}[7] = 0, \quad (481)$$

then

$$c_{\text{pro}}[8] = 0. \quad (482)$$

viii. If

$$\text{CORNERS} = 2, \quad (483)$$

then

A. If

$$c_{\text{pro}}[1] = 0 \text{ or} \quad (484)$$

$$c_{\text{pro}}[3] = 0 \text{ or} \quad (485)$$

$$\text{GRADE\_RO} \neq 6, \quad (486)$$

then

$$c_{\text{pro}}[0] = 0. \quad (487)$$

B. If

$$c_{\text{pro}}[1] = 0 \text{ or} \quad (488)$$

$$c_{\text{pro}}[5] = 0 \text{ or} \quad (489)$$

$$\text{GRADE\_RO} \neq 6, \quad (490)$$

then

$$c_{\text{pro}}[2] = 0. \quad (491)$$

C. If

$$c_{\text{pro}}[3] = 0 \text{ or} \quad (492)$$

$$c_{\text{pro}}[7] = 0 \text{ or} \quad (493)$$

$$\text{GRADE\_RO} \neq 6, \quad (494)$$

then

$$c_{\text{pro}}[6] = 0. \quad (495)$$

D. If

$$c_{\text{pro}}[5] = 0 \text{ or} \quad (496)$$

$$c_{\text{pro}}[7] = 0 \text{ or} \quad (497)$$

$$\text{GRADE\_RO} \neq 6, \quad (498)$$

then

$$c_{\text{pro}}[8] = 0. \quad (499)$$

The elements  $j = 0-8$  of PHAS are depicted in Figure 1.

(b) If HDU  $h_{\text{in}}$  of the `infile` does not include the column PHAS or

$$\text{doevtgrade} = \text{no or} \quad (500)$$

$$\text{GRADE\_RO} = \text{NULL}, \quad (501)$$

then

i. If HDU  $h_{\text{in}}$  of the `infile` includes the column PHA\_RO, then

$$\text{PHA\_RO} = \text{PHA\_RO}_{\text{in}}. \quad (502)$$

ii. If HDU  $h_{\text{in}}$  of the `infile` does not include the column PHA\_RO, then

A. If HDU  $h_{\text{in}}$  of the `infile` includes the column PHA and HDU  $h_{\text{in}}$  of the `infile` includes the keyword TGAINCOR and

$$\text{TGAINCOR} = 0, \quad (503)$$

then

$$\text{PHA\_RO} = \text{PHA}_{\text{in}}. \quad (504)$$

B. If HDU  $h_{\text{in}}$  of the `infile` includes the column PHA and HDU  $h_{\text{in}}$  of the `infile` includes the keyword TGAINCOR and

$$\text{TGAINCOR} \neq 0, \quad (505)$$

then

$$\text{PHA\_RO} = \text{NULL}. \quad (506)$$

C. If HDU  $h_{\text{in}}$  of the `infile` includes the column PHA and HDU  $h_{\text{in}}$  of the `infile` does not include the keyword TGAINCOR then

$$\text{PHA\_RO} = \text{PHA}_{\text{in}}. \quad (507)$$

D. If HDU  $h_{\text{in}}$  of the `infile` does not include the column PHA, then

$$\text{PHA\_RO} = \text{NULL}. \quad (508)$$

#### 19. PHAS\_ADJ:

(a) Non-graded:

If

$$\text{apply\_cti} = \text{yes} \quad (509)$$

and if HDU  $h_{\text{in}}$  of the `infile` includes the column PHAS, then the CTI-adjusted pulse heights are computed as follows.

- i. The real-valued arrays for the serial CTI adjustment  $\Delta_x$ , the parallel CTI adjustment  $\Delta_y$ , and the adjusted pulse heights PHAS\_ADJ are initialized such that

$$\Delta_x[j] = 0, \quad (510)$$

$$\Delta_y[j] = 0, \text{ and} \quad (511)$$

$$\text{PHAS\_ADJ}[j] = \text{PHAS}[j] \quad (512)$$

for every element  $j = 0-8$ , where the starting point for the adjusted pulse heights are the unadjusted pulse heights PHAS. Note that the values of the unadjusted pulse heights PHAS remain unchanged to ensure that it is possible to remove the CTI adjustment or to reapply the adjustment if the algorithm or calibration data are modified.

- ii. The CTI iteration counter  $n$  is initialized such that

$$n = 1. \quad (513)$$

- iii. The temporary variables  $\Delta'_x$ ,  $\Delta'_y$ , and PHAS\_ADJ' are set such that

$$\Delta'_x[j] = \Delta_x[j], \quad (514)$$

$$\Delta'_y[j] = \Delta_y[j], \text{ and} \quad (515)$$

$$\text{PHAS\_ADJ}'[j] = \text{PHAS\_ADJ}[j] \quad (516)$$

for each element  $j$ .

- iv. A. If there is a serial CTI trap-density map in the `ctifile` for `CCD_ID` and `NODE_ID = 0` or `2`, then the values of  $\Delta_x$  are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0], \quad (517)$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[0]s_x\rho_x[0]V_x[0], \quad (518)$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2] - c'_x[1]s_x\rho_x[1]V_x[1], \quad (519)$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3], \quad (520)$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[3]s_x\rho_x[3]V_x[3], \quad (521)$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5] - c'_x[4]s_x\rho_x[4]V_x[4], \quad (522)$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6], \quad (523)$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[6]s_x\rho_x[6]V_x[6], \text{ and} \quad (524)$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8] - c'_x[7]s_x\rho_x[7]V_x[7], \quad (525)$$

where

$$c_x[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 3, 6\text{)} \end{array} \right. \\ \text{FRCTRLX} \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \\ \text{(for } j = 1, 2, 4, 5, 7, 8\text{)}, \end{array} \right. \end{cases}$$

$$c'_x[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] < \text{split threshold or} \\ j \rightarrow \text{CHIPX} = 1, 256, 513, \text{ or } 768 \\ \text{(for } j = 0, 1, 3, 4, 6, 7), \end{array} \right. \\ \text{FRCTRLX} & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7), \end{array} \right. \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+1] + \Delta'_x[j+1] + \Delta'_y[j+1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 3, 4, 6, 7), \end{array} \right. \end{cases}$$

$$s_x = \text{a temperature dependent scaling factor :} \quad \begin{cases} 1 + \text{TCTIX}(T - \text{FP\_TEMPO}), & \text{if mtlfile} \neq \text{"none"} \\ 1, & \text{if mtlfile} = \text{"none"} \end{cases} \quad (526)$$

$$\text{TCTIX} = \text{the CCD\_ID dependent value in the column TCTIX of the ctifile,} \quad (527)$$

$$T = \left( \frac{t' - t'_k}{t'_{k+1} - t'_k} \right) (\text{FP\_TEMP}_{k+1} - \text{FP\_TEMP}_k) + \text{FP\_TEMP}_k, \quad (528)$$

$\{ T \text{ is the time dependent focal plane temperature,}$

$$t' = t + \text{TIMEDEL}_{\text{in}}(\text{TIMEPIXR}_{\text{evt}} - 0.5), \quad (529)$$

$\{ t \text{ is the TIME of the event,}$   
 $\{ \text{TIMEPIXR}_{\text{evt}} \text{ is a keyword in the infile,}$

$$t'_k = \text{TIME}_k + \text{TIMEDEL}_{\text{mtl}}(\text{TIMEPIXR}_{\text{mtl}} - 0.5), \quad (530)$$

$\{ \text{TIME}_k \text{ is the } k^{\text{th}} \text{ element of the column TIME in the mtlfile,}$   
 $t'_k \leq t',$   
 $\text{If } t' < t'_k \text{ for } k = 0, \text{ then } k = 0,$   
 $\text{FP\_TEMP}_k \text{ is the } k^{\text{th}} \text{ element of the column FP\_TEMP in the mtlfile,}$   
 $\text{TIMEDEL}_{\text{mtl}} \text{ is a keyword in the mtlfile,}$   
 $\text{TIMEPIXR}_{\text{mtl}} \text{ is a keyword in the mtlfile,}$

$$t'_{k+1} = \text{TIME}_{k+1} + \text{TIMEDEL}_{\text{mtl}}(\text{TIMEPIXR}_{\text{mtl}} - 0.5), \quad (531)$$

$\{ \text{TIME}_{k+1} \text{ is the } (k+1)^{\text{th}} \text{ element of the column TIME in the mtlfile,}$   
 $t'_{k+1} > t',$   
 $\text{If } t' > t'_k \text{ for } k = n, \text{ where } n \text{ is the last element, then } k = n,$   
 $\text{FP\_TEMP}_{k+1} \text{ is the } (k+1)^{\text{th}} \text{ element of the column FP\_TEMP in the}$   
 $\text{mtlfile,}$

$$\text{FP\_TEMPO} = \text{a keyword in the ctifile,} \quad (532)$$

$$\rho_x[j] = \text{serial trap density,} \quad (533)$$

$\{ \rho_x[j] \text{ depends upon the CCD\_ID and upon the nint(CHIPX\_ADJ) and nint(CHIPY\_ADJ)}$   
 $\{ \text{coordinates associated with element } j \text{ of PHAS\_ADJ}[j] \text{ (see Fig. 1),}$

$$V_x[j] = \left( \frac{\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME\_X}_{l+1} - \text{VOLUME\_X}_l) + \text{VOLUME\_X}_l, \quad (534)$$



$$\left\{ \begin{array}{l}
\text{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column PHA in the ctifile,} \\
\text{PHA}_l \text{ (and PHA}_{l+1}) \text{ are CCD\_ID dependent,} \\
\text{PHA}_l \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\
\text{If PHA}_l > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\
\text{PHA}_{l+1} \text{ is the } (l + 1)^{\text{th}} \text{ element of the column PHA in the ctifile,} \\
\text{PHA}_{l+1} > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\
\text{If PHA}_{l+1} \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\
\text{element, then } l = n, \\
\text{VOLUME\_X}_l \text{ is the } l^{\text{th}} \text{ element of the column VOLUME\_X in the ctifile,} \\
\text{VOLUME\_X}_l, \text{ which is CCD\_ID dependent, is associated with PHA}_l, \\
\text{VOLUME\_X}_{l+1} \text{ is the } (l + 1)^{\text{th}} \text{ element of the column VOLUME\_X in the} \\
\text{ctifile, and} \\
\text{VOLUME\_X}_{l+1}, \text{ which is CCD\_ID dependent, is associated with PHA}_{l+1}
\end{array} \right.$$

B. If there is a serial CTI trap-density map in the ctifile for CCD\_ID and NODE\_ID = 1 or 3, then the values of  $\Delta_x$  are given by

$$\Delta_x[0] = c_x[0]s_x\rho_x[0]V_x[0] - c'_x[1]s_x\rho_x[1]V_x[1], \quad (535)$$

$$\Delta_x[1] = c_x[1]s_x\rho_x[1]V_x[1] - c'_x[2]s_x\rho_x[2]V_x[2], \quad (536)$$

$$\Delta_x[2] = c_x[2]s_x\rho_x[2]V_x[2], \quad (537)$$

$$\Delta_x[3] = c_x[3]s_x\rho_x[3]V_x[3] - c'_x[4]s_x\rho_x[4]V_x[4], \quad (538)$$

$$\Delta_x[4] = c_x[4]s_x\rho_x[4]V_x[4] - c'_x[5]s_x\rho_x[5]V_x[5], \quad (539)$$

$$\Delta_x[5] = c_x[5]s_x\rho_x[5]V_x[5], \quad (540)$$

$$\Delta_x[6] = c_x[6]s_x\rho_x[6]V_x[6] - c'_x[7]s_x\rho_x[7]V_x[7], \quad (541)$$

$$\Delta_x[7] = c_x[7]s_x\rho_x[7]V_x[7] - c'_x[8]s_x\rho_x[8]V_x[8], \text{ and} \quad (542)$$

$$\Delta_x[8] = c_x[8]s_x\rho_x[8]V_x[8], \quad (543)$$

where

$$c_x[j] = \left\{ \begin{array}{l}
0 \quad \left\{ \begin{array}{l}
\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\
\text{(for all } j), \\
\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\
\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\
\text{PHAS}[j + 1] + \Delta'_x[j + 1] + \Delta'_y[j + 1] \\
\text{(for } j = 0, 1, 3, 4, 6, 7), \\
\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\
\text{(for } j = 2, 5, 8)
\end{array} \right. \\
1 \quad \left\{ \begin{array}{l}
\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\
\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\
\text{PHAS}[j + 1] + \Delta'_x[j + 1] + \Delta'_y[j + 1] \\
\text{(for } j = 0, 1, 3, 4, 6, 7),
\end{array} \right.
\end{array} \right.$$

$$c'_x[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] < \text{split threshold or} \\ j \rightarrow \text{CHIPX} = 257, 512, 769, \text{ or } 1024 \\ \text{(for } j = 1, 2, 4, 5, 7, 8), \\ \text{FRCTRLX} & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \geq \text{split threshold} \\ \text{(for } j = 1, 2, 4, 5, 7, 8), \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j-1] + \Delta'_x[j-1] + \Delta'_y[j-1] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 1, 2, 4, 5, 7, 8), \end{array} \right. \end{array} \right. \end{cases}$$

and  $s_x$ ,  $T$ ,  $t'$ ,  $t'_k$ ,  $t'_{k+1}$ ,  $\rho_x[j]$ , and  $V_x[j]$  are given by equations. 526, 528, 529, 530, 531, 533, and 534, respectively.

- v. If there is a parallel CTI trap-density map in the `ctifile` for `CCD_ID`, then the values of  $\Delta_y$  are given by

$$\Delta_y[0] = c_y[0]s_y\rho_y[0]V_y[0], \quad (544)$$

$$\Delta_y[1] = c_y[1]s_y\rho_y[1]V_y[1], \quad (545)$$

$$\Delta_y[2] = c_y[2]s_y\rho_y[2]V_y[2], \quad (546)$$

$$\Delta_y[3] = c_y[3]s_y\rho_y[3]V_y[3] - c'_y[0]s_y\rho_y[0]V_y[0], \quad (547)$$

$$\Delta_y[4] = c_y[4]s_y\rho_y[4]V_y[4] - c'_y[1]s_y\rho_y[1]V_y[1], \quad (548)$$

$$\Delta_y[5] = c_y[5]s_y\rho_y[5]V_y[5] - c'_y[2]s_y\rho_y[2]V_y[2], \quad (549)$$

$$\Delta_y[6] = c_y[6]s_y\rho_y[6]V_y[6] - c'_y[3]s_y\rho_y[3]V_y[3], \quad (550)$$

$$\Delta_y[7] = c_y[7]s_y\rho_y[7]V_y[7] - c'_y[4]s_y\rho_y[4]V_y[4], \text{ and} \quad (551)$$

$$\Delta_y[8] = c_y[8]s_y\rho_y[8]V_y[8] - c'_y[5]s_y\rho_y[5]V_y[5], \quad (552)$$

where

$$c_y[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold} \\ \text{(for all } j), \\ \text{FRCTRLX} & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \\ \text{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \text{(for } j = 3, 4, 5, 6, 7, 8), \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2) \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \\ \text{PHAS}[j-3] + \Delta'_x[j-3] + \Delta'_y[j-3] \\ \text{(for } j = 3, 4, 5, 6, 7, 8), \end{array} \right. \end{array} \right. \end{cases}$$

$$c'_y[j] = \begin{cases} 0 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] < \text{split threshold or} \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] < \text{split threshold or} \\ j \rightarrow \text{CHIPY} = 1 \text{ or } 1024 \\ \text{(for } j = 1, 2, 3, 4, 5), \end{array} \right. \\ \text{FRCTRLY} & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] > \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2, 3, 4, 5), \end{array} \right. \\ 1 & \left\{ \begin{array}{l} \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \leq \\ \text{PHAS}[j+3] + \Delta'_x[j+3] + \Delta'_y[j+3] \text{ and} \\ \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \geq \text{split threshold} \\ \text{(for } j = 0, 1, 2, 3, 4, 5), \end{array} \right. \end{cases}$$

$$s_y = \text{a temperature dependent scaling factor :}$$

$$\begin{cases} 1 + \text{TCTIY}(T - \text{FP\_TEMPO}), & \text{if mtlfile} \neq \text{"none"} \\ 1, & \text{if mtlfile} = \text{"none"} \end{cases} \quad (553)$$

$$\text{TCTIY} = \text{the CCD\_ID dependent value in the column TCTIY of the ctifile,} \quad (554)$$

$$\rho_y[j] = \text{parallel trap density,} \quad (555)$$

$$\left\{ \begin{array}{l} \rho_y[j] \text{ depends upon the CCD\_ID and upon the nint(CHIPX\_ADJ) and nint(CHIPY\_ADJ)} \\ \text{coordinates associated with element } j \text{ of PHAS\_ADJ}[j] \text{ (see Fig. 1),} \end{array} \right.$$

$$V_y[j] = \left( \frac{\text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME\_Y}_{l+1} - \text{VOLUME\_Y}_l) + \text{VOLUME\_Y}_l, \quad (556)$$

$$\left\{ \begin{array}{l} \text{PHA}_l \text{ is the } l^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_l \text{ (and } \text{PHA}_{l+1}) \text{ are CCD\_ID dependent,} \\ \text{PHA}_l \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_l > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = 0, \text{ then } l = 0, \\ \text{PHA}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column PHA in the ctifile,} \\ \text{PHA}_{l+1} > \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j], \\ \text{If } \text{PHA}_{l+1} \leq \text{PHAS}[j] + \Delta'_x[j] + \Delta'_y[j] \text{ for } l = n, \text{ where } n \text{ is the last} \\ \text{element, then } l = n, \\ \text{VOLUME\_Y}_l \text{ is the } l^{\text{th}} \text{ element of the column VOLUME\_Y in the ctifile,} \\ \text{VOLUME\_Y}_l, \text{ which is CCD\_ID dependent, is associated with } \text{PHA}_l, \\ \text{VOLUME\_Y}_{l+1} \text{ is the } (l+1)^{\text{th}} \text{ element of the column VOLUME\_Y in the} \\ \text{ctifile,} \\ \text{VOLUME\_Y}_{l+1}, \text{ which is CCD\_ID dependent, is associated with } \text{PHA}_{l+1}, \end{array} \right.$$

and  $T$ ,  $t'$ ,  $t'_k$ , and  $t'_{k+1}$ , are given by equations. 528, 529, 530, and 531, respectively.

vi. The CTI-adjusted pulse heights

$$\text{PHAS\_ADJ}[j] = \text{PHAS}[j] + \Delta_x[j] + \Delta_y[j] \quad (557)$$

for all  $j$ .

vii. A. If

$$|\text{PHAS\_ADJ}'[j] - \text{PHAS\_ADJ}[j]| < \text{cticonverge (for all } j) \text{ and} \quad (558)$$

$$n \leq \text{max\_cti\_iter}, \quad (559)$$

then the computation of PHAS\_ADJ is complete for the event.

B. If

$$|\text{PHAS\_ADJ}'[j] - \text{PHAS\_ADJ}[j]| \geq \text{cticonverge (for one or more } j) \text{ and} \quad (560)$$

$$n < \text{max\_cti\_iter}, \quad (561)$$

then  $n = n + 1$  and steps 1.5.19(a)iii–1.5.19(a)vii are repeated.

C. If

$$|\text{PHAS\_ADJ}'[j] - \text{PHAS\_ADJ}[j]| \geq \text{cticonverge} \text{ (for one or more } j) \text{ and} \quad (562)$$

$$n \geq \text{max\_cti\_iter}, \quad (563)$$

then no additional iterations are performed, the values of  $\text{PHAS\_ADJ}[j]$  from the most recent iteration are used as are, and  $\text{STATUS}[k] = 1$  for bit  $k = 20$  (of 0–31) to indicate that the CTI adjustment did not converge.

## 20. FLTGRADE:

(a) If HDU  $h_{\text{in}}$  of the `infile` includes the column `PHAS` and

$$\text{apply\_cti} = \text{yes and} \quad (564)$$

$$\text{doevtgrade} = \text{yes}, \quad (565)$$

then

$$\text{FLTGRADE} = c_f[0] + 2c_f[1] + 4c_f[2] + 8c_f[3] + \quad (566)$$

$$16c_f[5] + 32c_f[6] + 64c_f[7] + 128c_f[8]. \quad (567)$$

The values of  $c_f[j]$  are determined as follows.

i. Each value of  $c_f[j]$  is initialized such that

$$c_f[j] = 1. \quad (568)$$

ii. If

$$\text{PHAS\_ADJ}[j] < \text{split threshold}, \quad (569)$$

then

$$c_f[j] = 0. \quad (570)$$

The elements  $j = 0$ –8 of `PHAS_ADJ` are depicted in Figure 1.

(b) If HDU  $h_{\text{in}}$  of the `infile` includes the column `PHAS` and

$$\text{apply\_cti} = \text{no and} \quad (571)$$

$$\text{doevtgrade} = \text{yes}, \quad (572)$$

then

$$\text{FLTGRADE} = \text{FLTGRADE\_RO}. \quad (573)$$

(c) If HDU  $h_{\text{in}}$  of the `infile` does not include the column `PHAS` or

$$\text{doevtgrade} = \text{no}, \quad (574)$$

then

i. If HDU  $h_{\text{in}}$  of the `infile` includes the column `FLTGRADE`, then

$$\text{FLTGRADE} = \text{FLTGRADE}_{\text{in}}. \quad (575)$$

ii. If HDU  $h_{\text{in}}$  of the `infile` does not include the column `FLTGRADE`, then

$$\text{FLTGRADE} = \text{NULL}. \quad (576)$$

21. `GRADE`:

(a) If

$$\text{FLTGRADE} \neq \text{NULL} \text{ and} \quad (577)$$

$$\text{gradefile} \neq \text{none} \text{ and} \quad (578)$$

HDU  $h_{\text{grade}}$  of the `gradefile` has a row  $r$ , where

$$\text{FLTGRADE}_{\text{grade}[r]} = \text{FLTGRADE}, \quad (579)$$

then

$$\text{GRADE} = \text{GRADE}_{\text{grade}[r]}. \quad (580)$$

(b) If

$$\text{FLTGRADE} = \text{NULL} \text{ or} \quad (581)$$

$$\text{gradefile} = \text{none} \text{ or} \quad (582)$$

HDU  $h_{\text{grade}}$  of the `gradefile` does not have a row  $r$ , where

$$\text{FLTGRADE}_{\text{grade}[r]} = \text{FLTGRADE}, \quad (583)$$

then

$$\text{GRADE} = \text{NULL}. \quad (584)$$

22. `PHA`:

(a) Timed mode, CTI adjusted, not NULL:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (585)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (586)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (587)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (588)$$

and

$$\text{doevtgrade} = \text{yes}, \text{ and} \quad (589)$$

$$\text{apply\_cti} = \text{yes}, \quad (590)$$

and

$$\text{CORNERS} \neq 2 \text{ or} \quad (591)$$

$$\text{GRADE} \neq \text{NULL}, \quad (592)$$

then

$$\text{PHA} = \sum_{j=0}^8 c_p[j] \text{PHAS\_ADJ}[j]. \quad (593)$$

The elements  $j = 0-8$  of `PHAS_ADJ` are depicted in Figure 1. The values of  $c_p[j]$  are determined as follows.

i. The values are initialized such that

$$c_p[j] = 1 \tag{594}$$

for  $j = 0-8$ .

ii. If

$$\text{PHAS\_ADJ}[j] < \text{split threshold}, \tag{595}$$

then

$$c_p[j] = 0. \tag{596}$$

iii. If

$$\text{CORNERS} = -1, \tag{597}$$

then

$$c_p[0] = c_p[2] = c_p[6] = c_p[8] = 0. \tag{598}$$

iv. If

$$\text{CORNERS} = 0, \tag{599}$$

then there are no additional constraints on  $c_p[0]$ ,  $c_p[2]$ ,  $c_p[6]$ , and  $c_p[8]$ .

v. If

$$\text{CORNERS} = 1, \tag{600}$$

then

A. If

$$c_p[1] = c_p[3] = 0, \tag{601}$$

then

$$c_p[0] = 0. \tag{602}$$

B. If

$$c_p[1] = c_p[5] = 0, \tag{603}$$

then

$$c_p[2] = 0. \tag{604}$$

C. If

$$c_p[3] = c_p[7] = 0, \tag{605}$$

then

$$c_p[6] = 0. \tag{606}$$

D. If

$$c_p[5] = c_p[7] = 0, \tag{607}$$

then

$$c_p[8] = 0. \tag{608}$$

vi. If

$$\text{CORNERS} = 2, \tag{609}$$

then

A. If

$$c_p[1] = 0 \text{ or} \tag{610}$$

$$c_p[3] = 0 \text{ or} \tag{611}$$

$$\text{GRADE} \neq 6, \tag{612}$$

then

$$c_p[0] = 0. \tag{613}$$

B. If

$$c_p[1] = 0 \text{ or} \tag{614}$$

$$c_p[5] = 0 \text{ or} \tag{615}$$

$$\text{GRADE} \neq 6, \tag{616}$$

then

$$c_p[2] = 0. \tag{617}$$

C. If

$$c_p[3] = 0 \text{ or} \tag{618}$$

$$c_p[7] = 0 \text{ or} \tag{619}$$

$$\text{GRADE} \neq 6, \tag{620}$$

then

$$c_p[6] = 0. \tag{621}$$

D. If

$$c_p[5] = 0 \text{ or} \tag{622}$$

$$c_p[7] = 0 \text{ or} \tag{623}$$

$$\text{GRADE} \neq 6, \tag{624}$$

then

$$c_p[8] = 0. \tag{625}$$

(b) Timed mode, CTI adjusted, NULL:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (626)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (627)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (628)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT,} \quad (629)$$

and

$$\text{doevtgrade} = \text{yes, and} \quad (630)$$

$$\text{apply\_cti} = \text{yes,} \quad (631)$$

and

$$\text{CORNERS} = 2 \text{ and} \quad (632)$$

$$\text{GRADE} = \text{NULL,} \quad (633)$$

then

$$\text{PHA} = \text{NULL.} \quad (634)$$

(c) Timed mode, not CTI adjusted, not NULL:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (635)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (636)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (637)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT,} \quad (638)$$

and

$$\text{doevtgrade} = \text{yes, and} \quad (639)$$

$$\text{apply\_cti} = \text{no,} \quad (640)$$

and

$$\text{CORNERS} \neq 2 \text{ or} \quad (641)$$

$$\text{GRADE} \neq \text{NULL,} \quad (642)$$

then

$$\text{PHA} = \sum_{j=0}^8 c_p[j] \text{PHAS}[j]. \quad (643)$$

The elements  $j = 0-8$  of PHAS are depicted in Figure 1. The values of  $c_p[j]$  are determined as follows.

i. The values are initialized such that

$$c_p[j] = 1 \quad (644)$$

for  $j = 0-8$ .



ii. If

$$\text{PHAS}[j] < \text{split threshold}, \quad (645)$$

then

$$c_p[j] = 0. \quad (646)$$

iii. If

$$\text{CORNERS} = -1, \quad (647)$$

then

$$c_p[0] = c_p[2] = c_p[6] = c_p[8] = 0. \quad (648)$$

iv. If

$$\text{CORNERS} = 0, \quad (649)$$

then there are no additional constraints on  $c_p[0]$ ,  $c_p[2]$ ,  $c_p[6]$ , and  $c_p[8]$ .

v. If

$$\text{CORNERS} = 1, \quad (650)$$

then

A. If

$$c_p[1] = c_p[3] = 0, \quad (651)$$

then

$$c_p[0] = 0. \quad (652)$$

B. If

$$c_p[1] = c_p[5] = 0, \quad (653)$$

then

$$c_p[2] = 0. \quad (654)$$

C. If

$$c_p[3] = c_p[7] = 0, \quad (655)$$

then

$$c_p[6] = 0. \quad (656)$$

D. If

$$c_p[5] = c_p[7] = 0, \quad (657)$$

then

$$c_p[8] = 0. \quad (658)$$

vi. If

$$\text{CORNERS} = 2, \quad (659)$$

then

A. If

$$c_p[1] = 0 \text{ or} \quad (660)$$

$$c_p[3] = 0 \text{ or} \quad (661)$$

$$\text{GRADE} \neq 6, \quad (662)$$

then

$$c_p[0] = 0. \quad (663)$$

B. If

$$c_p[1] = 0 \text{ or} \quad (664)$$

$$c_p[5] = 0 \text{ or} \quad (665)$$

$$\text{GRADE} \neq 6, \quad (666)$$

then

$$c_p[2] = 0. \quad (667)$$

C. If

$$c_p[3] = 0 \text{ or} \quad (668)$$

$$c_p[7] = 0 \text{ or} \quad (669)$$

$$\text{GRADE} \neq 6, \quad (670)$$

then

$$c_p[6] = 0. \quad (671)$$

D. If

$$c_p[5] = 0 \text{ or} \quad (672)$$

$$c_p[7] = 0 \text{ or} \quad (673)$$

$$\text{GRADE} \neq 6, \quad (674)$$

then

$$c_p[8] = 0. \quad (675)$$

(d) Timed mode, not CTI adjusted, NULL:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (676)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT} \text{ or} \quad (677)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS} \text{ or} \quad (678)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (679)$$

and

$$\text{doevtgrade} = \text{yes, and} \quad (680)$$

$$\text{apply_cti} = \text{no,} \quad (681)$$

and

$$\text{CORNERS} = 2 \text{ and} \quad (682)$$

$$\text{GRADE} = \text{NULL,} \quad (683)$$

then

$$\text{PHA} = \text{NULL.} \quad (684)$$

(e) Graded mode, CTI adjusted:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED or} \quad (685)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED,} \quad (686)$$

and

$$\text{doevtgrade} = \text{yes, and} \quad (687)$$

$$\text{apply_cti} = \text{yes,} \quad (688)$$

then

i. The initial pulse height adjustment

$$\Delta_y = s_y \rho_y V_y, \quad (689)$$

where  $s_y$  is given by equation 553,  $\rho_y$  is the parallel trap density associated with `CCD_ID`, `CHIPX_ADJ`, and `CHIPY_ADJ`, and  $V_y$  is given by

$$V_y = \left( \frac{\text{PHA\_RO} - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME}_{Y_{l+1}} - \text{VOLUME}_{Y_l}) + \text{VOLUME}_{Y_l} \quad (690)$$

(see equation 556).

ii. The approximate energy associated with `PHA_RO` +  $\Delta_y$  is given by

$$\text{ENERGY}_{\text{approx}} = \left( \frac{\text{PHA\_RO} + \Delta_y - \text{PHA}_{\text{gain},r}[k]}{\text{PHA}_{\text{gain},r}[k+1] - \text{PHA}_{\text{gain},r}[k]} \right) (\text{ENERGY}_{\text{gain},r}[k+1] - \text{ENERGY}_{\text{gain},r}[k]) + \text{ENERGY}_{\text{gain},r}[k] \quad (691)$$

(see equation 745).

iii. The HDU  $h$  of the `grade_image_file` is identified such that

$$\text{CCD\_ID} = \text{CCD\_ID}_{\text{grdimg},h}, \quad (692)$$

where `CCD_IDgrdimg,h` is the value of the keyword `CCD_ID` in HDU  $h$  of the `grade_image_file`.

iv. The variable `REF_EN` is set equal to the value of the keyword of the same name in HDU  $h$  of the `grade_image_file`.

v. The variable `REF_EN` is converted to units of eV.

vi. The row  $r$  of HDU  $h$  of the `grade_image_file` is identified such that

$$\text{FLTGRADE} = \text{FLTGRADE}_{\text{grdimg},h,r}, \quad (693)$$

where  $\text{FLTGRADE}_{\text{grdimg},h}$  is the column `FLTGRADE` in HDU  $h$  of the `grade_image_file`.

vii. The variable

$$\text{ESCL} = \text{ESCL}_{\text{grdimg},h,r}, \quad (694)$$

where  $\text{ESCL}_{\text{grdimg},h}$  is the column `ESCL` in HDU  $h$  of the `grade_image_file`.

viii. The array

$$\text{GRDIMG}[j] = \text{GRDIMG}_{\text{grdimg},h,r}[j], \quad (695)$$

for  $j = 0-8$ , where  $\text{GRDIMG}_{\text{grdimg},h}$  is the column named `GRDIMG` in HDU  $h$  of the `grade_image_file`.

ix. If

$$\text{GRDIMG}[j] < 0, \quad (696)$$

then

$$\text{GRDIMG}[j] = 0. \quad (697)$$

x. The fraction of the charge in the outer eight pixels of a 3 pixel  $\times$  3 pixel event island at the energy `REF_EN` is given by

$$f_{\text{grdimg,ref}} = 1 - \text{GRDIMG}[4]. \quad (698)$$

xi. If

$$f_{\text{grdimg,ref}} < 0, \quad (699)$$

then

$$f_{\text{grdimg,ref}} = 0. \quad (700)$$

xii. At the approximate energy  $\text{ENERGY}_{\text{approx}}$ , this fraction is

$$f_{\text{grdimg,approx}} = f_{\text{grdimg,ref}} \left( \frac{\text{ENERGY}_{\text{approx}}}{\text{REF\_EN}} \right)^{\text{ESCL}}. \quad (701)$$

xiii. Perform the following steps (1.5.3.22(e)xiiiA–1.5.3.22(e)xiiiH) three times.

A. For  $j = 0-3$  and  $j = 5-8$  (i.e. for the outer eight pixels of a 3 pixel  $\times$  3 pixel event island),

$$\text{PHAS\_ADJ}[j] = \left( \frac{f_{\text{grdimg,approx}}}{f_{\text{grdimg,ref}}} \right) \text{GRDIMG}[j] (\text{PHA\_RO} + \Delta_y). \quad (702)$$

B. For  $j = 4$ ,

$$\text{PHAS\_ADJ}[4] = (1 - f_{\text{grdimg,approx}}) (\text{PHA\_RO} + \Delta_y). \quad (703)$$

C. For  $j = 0-8$ , if

$$\text{PHAS\_ADJ}[j] \geq \text{split threshold}, \quad (704)$$

then

$$V_y[j] = \left( \frac{\text{PHAS\_ADJ}[j] - \text{PHA}_l}{\text{PHA}_{l+1} - \text{PHA}_l} \right) (\text{VOLUME\_Y}_{l+1} - \text{VOLUME\_Y}_l) + \text{VOLUME\_Y}_l \quad (705)$$

(see equation 556).

D. For  $j = 0-8$ , if

$$\text{PHAS\_ADJ}[j] < \text{split threshold}, \quad (706)$$

then

$$V_y[j] = 0. \quad (707)$$

E. For  $j = 0-2$ ,

$$V_y[j+6] = V_y[j+6] - V_y[j+3] - V_y[j]. \quad (708)$$

F. For  $j = 0-2$ ,

$$V_y[j+3] = V_y[j+3] - V_y[j]. \quad (709)$$

G. For  $j = 0-8$ , if

$$V_y[j] < 0, \quad (710)$$

then

$$V_y[j] = 0. \quad (711)$$

H. The iterated value of the pulse height adjustment

$$\Delta_y = \sum_{j=0}^8 s_y \rho_y[j] V_y[j], \quad (712)$$

where  $s_y$  is given by equation 553,  $\rho_y[0] = \rho_y[3] = \rho_y[6]$  is the parallel trap density associated with `CCD_ID`, `CHIPX_ADJ-1`, and `CHIPY_ADJ`,  $\rho_y[1] = \rho_y[4] = \rho_y[7]$  is the parallel trap density associated with `CCD_ID`, `CHIPX_ADJ`, and `CHIPY_ADJ`,  $\rho_y[2] = \rho_y[5] = \rho_y[8]$  is the parallel trap density associated with `CCD_ID`, `CHIPX_ADJ+1`, and `CHIPY_ADJ`, and  $V_y[j]$  is given by equation 705.

xiv. The CTI adjusted pulse height

$$\text{PHA} = \text{nint}(\text{PHA\_RO} + \Delta_y), \quad (713)$$

where  $\text{nint}(\text{PHA\_RO} + \Delta_y)$  indicates that  $(\text{PHA\_RO} + \Delta_y)$  is rounded to the nearest integer.

(f) Graded mode, not CTI adjusted:

If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \text{ or} \quad (714)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED}, \quad (715)$$

and

$$\text{doevtgrade} = \text{yes, and} \quad (716)$$

$$\text{apply\_cti} = \text{no}, \quad (717)$$

then

$$\text{PHA} = \text{PHA\_RO}_{\text{in}}. \quad (718)$$

- (g) `doevtgrade = no`, PHA exists:  
If

$$\text{doevtgrade} = \text{no} \quad (719)$$

and HDU  $h_{\text{in}}$  of the `infile` includes the column PHA, then

$$\text{PHA} = \text{PHA}_{\text{in}}. \quad (720)$$

- (h) `doevtgrade = no`, PHA missing:  
If

$$\text{doevtgrade} = \text{no} \quad (721)$$

and HDU  $h_{\text{in}}$  of the `infile` does not include the column PHA, then

$$\text{PHA} = \text{NULL}. \quad (722)$$

- (i) If

$$\text{PHA} \neq \text{NULL} \text{ and} \quad (723)$$

$$\text{PHA} \geq 32767, \quad (724)$$

then  $\text{STATUS}[k] = 1$  for bit  $k = 3$  (of 0–31).

### 23. Time-dependent gain:

- (a) If

$$\text{apply\_tgain} = \text{yes}, \quad (725)$$

then

$$\text{PHA} = \text{PHA} - \text{int} \left[ \left( \frac{\text{TIME} - \text{EPOCH1}}{\text{EPOCH2} - \text{EPOCH1}} \right) (\delta_2 - \delta_1) + \delta_1 - \epsilon \right], \quad (726)$$

where

$$\text{int} = \text{the integer portion of (i.e. truncate or round down)}, \quad (727)$$

$$\text{TIME} = \text{the time of the event}, \quad (728)$$

$$\text{EPOCH1} = \text{a keyword in the } \text{tgainfile}, \quad (729)$$

$$\text{EPOCH2} = \text{a keyword in the } \text{tgainfile}, \quad (730)$$

$$\delta_1 = \left( \frac{\text{PHA} - \text{PHA}_m[r]}{\text{PHA}_{m+1}[r] - \text{PHA}_m[r]} \right) (\text{DELTPHA1}_{m+1}[r] - \text{DELTPHA1}_m[r]) + \quad (731)$$

$$\text{DELTPHA1}_m[r], \quad (732)$$

$$\left\{ \begin{array}{l} r \text{ is the row of the } \text{tgainfile} \text{ where} \\ \left\{ \begin{array}{l} \text{CCD\_ID}[r] = \text{CCD\_ID}, \\ \text{CHIPX\_LO}[r] \leq \text{nint}(\text{CHIPX\_ADJ}), \\ \text{CHIPX\_HI}[r] \geq \text{nint}(\text{CHIPX\_ADJ}), \\ \text{CHIPY\_LO}[r] \leq \text{nint}(\text{CHIPY\_ADJ}), \text{ and} \\ \text{CHIPY\_HI}[r] \geq \text{nint}(\text{CHIPY\_ADJ}). \end{array} \right. \\ m \text{ is the element of row } r \text{ where} \\ \left\{ \begin{array}{l} \text{PHA}_m[r] \leq \text{PHA} \text{ and} \\ \text{PHA}_{m+1}[r] > \text{PHA}. \end{array} \right. \\ \text{If } \text{PHA} < \text{PHA}_m[r] \text{ for } m = 0, \text{ then } m = 0. \\ \text{If } \text{PHA} \geq \text{PHA}_m[r] \text{ for } m = M \text{ and } M \text{ is the last element of } \text{PHA}[r], \\ \text{then } m = M - 1. \end{array} \right. \quad (733)$$

The `tgainfile` includes a binary table with columns named  
`CCD_ID`, `CHIPX_LO`, `CHIPX_HI`, `CHIPY_LO`, `CHIPY_HI`, `PHA`, `DELTPHA1`, and  
`DELTPHA2`.

$$\delta_2 = \left( \frac{\text{PHA} - \text{PHA}_m[r]}{\text{PHA}_{m+1}[r] - \text{PHA}_m[r]} \right) (\text{DELTPHA2}_{m+1}[r] - \text{DELTPHA2}_m[r]) + \quad (734)$$

$$\text{DELTPHA2}_m[r], \quad (735)$$

$$\epsilon = \text{is a uniform random deviate in the range } [0, 1), \quad (736)$$

$$\left\{ \begin{array}{l} \text{If } \text{rand\_pha} = \text{no, then } \epsilon = 0. \end{array} \right. \quad (737)$$

(b) If

$$\text{PHA} \neq \text{NULL and} \quad (738)$$

$$\text{PHA} \geq 32767, \quad (739)$$

then  $\text{STATUS}[k] = 1$  for bit  $k = 3$  (of 0–31).

24. CORN\_PHA:

(a) If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (740)$$

then the value of CORN\_PHA is read from the infile.

25. ENERGY:

(a) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and  $\text{PHA} > 0$ , then

i. The row  $r$  in the `gainfile` is identified such that

$$\text{CCD\_ID} = \text{CCD\_ID}_{\text{gain},r}, \quad (741)$$

$$\text{CHIPX\_MIN}_{\text{gain},r} \leq \text{nint}(\text{CHIPX\_ADJ}) \leq \text{CHIPX\_MAX}_{\text{gain},r}, \quad \text{and} \quad (742)$$

$$\text{CHIPY\_MIN}_{\text{gain},r} \leq \text{nint}(\text{CHIPY\_ADJ}) \leq \text{CHIPY\_MAX}_{\text{gain},r}, \quad (743)$$

where  $\text{CCD\_ID}_{\text{gain}}$ ,  $\text{CHIPX\_MIN}_{\text{gain}}$ ,  $\text{CHIPX\_MAX}_{\text{gain}}$ ,  $\text{CHIPY\_MIN}_{\text{gain}}$ , and  $\text{CHIPY\_MAX}_{\text{gain}}$  are columns in the `gainfile`.

ii. A uniform random deviate  $\Delta p$  is computed over the interval from  $[-0.5, +0.5)$ .

iii. The element  $k$  of row  $r$  of  $\text{PHA}_{\text{gain}}$  is identified such that

$$\text{PHA}_{\text{gain},r}[k] \leq (\text{PHA} + \Delta p) < \text{PHA}_{\text{gain},r}[k + 1], \quad (744)$$

where  $\text{PHA}_{\text{gain}}$  is a vector column in the `gainfile`. If  $\text{PHA} + \Delta p < \text{PHA}_{\text{gain},r}[0]$ , then  $k = 0$ . If  $\text{PHA}_{\text{gain},r}[\text{NPOINTS} - 2] \leq \text{PHA} + \Delta p$ , then  $k = \text{NPOINTS} - 2$ , where `NPOINTS` is a column in the `gainfile`.

iv. The ENERGY of an event is computed from the PHA of the event:

$$\text{ENERGY} = \left( \frac{\text{PHA} + \Delta p - \text{PHA}_{\text{gain},r}[k]}{\text{PHA}_{\text{gain},r}[k + 1] - \text{PHA}_{\text{gain},r}[k]} \right) (\text{ENERGY}_{\text{gain},r}[k + 1] - \text{ENERGY}_{\text{gain},r}[k]) + \text{ENERGY}_{\text{gain},r}[k], \quad (745)$$

where  $\text{ENERGY}_{\text{gain}}$  is a vector column in the `gainfile`.

v. If  $\text{ENERGY} < 0$ , then  $\text{ENERGY} = 0$ .

(b) If the parameter `calculate_pi` = yes and the parameter `gainfile` is specified and  $\text{PHA} \leq 0$ , then  $\text{ENERGY} = 0$ .

(c) If the parameter `calculate_pi` = no or if the parameter `gainfile` is not specified, then

i. If the `infile` includes the ENERGY of an event, then the ENERGY of the event is equal to the ENERGY in the `infile`.

ii. If the `infile` does not include the `ENERGY` of an event, then `ENERGY = 0`.

26. `PI`:

(a) If

$$\text{calculate\_pi} = \text{yes}, \quad (746)$$

then

i.

$$\text{PI} = \text{int} \left( \frac{\text{ENERGY}}{\text{pi\_bin\_width}} \right) + 1, \quad (747)$$

where “int” indicates the integer portion of what is in parentheses (i.e. the value is truncated or rounded down).

ii. If

$$\text{PI} < 1, \quad (748)$$

then `PI = 1`.

iii. If

$$\text{PI} > \text{pi\_num\_bins}, \quad (749)$$

then `PI = pi_num_bins`.

(b) If

$$\text{calculate\_pi} = \text{no} \quad (750)$$

and the `infile` includes the value of `PI` for an event, then the value of `PI` is read from the `infile`.

27. `pix_adj`:

(a) centroid:

i. If

$$\text{pix\_adj} = \text{centroid} \quad (751)$$

and

$$\text{DATAMODE}_{i_n} = \text{CC33\_FAINT} \text{ or} \quad (752)$$

$$\text{DATAMODE}_{i_n} = \text{FAINT} \text{ or} \quad (753)$$

$$\text{DATAMODE}_{i_n} = \text{FAINT\_BIAS} \text{ or} \quad (754)$$

$$\text{DATAMODE}_{i_n} = \text{VFAINT}, \quad (755)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} - w'[0] + w'[2] - w'[3] + w'[5] - w'[6] + w'[8] \text{ and} \quad (756)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} - w'[0] - w'[1] - w'[2] + w'[6] + w'[7] + w'[8], \quad (757)$$

where

$$w'[j] = \frac{w[j]}{\sum_{j=0}^8 w[j]}, \quad (758)$$

$$w[j] = \begin{cases} p[j] & \text{if the pixel is valid} \\ 0 & \text{if the pixel is invalid,} \end{cases} \quad (759)$$

$$p[j] = \begin{cases} \text{PHAS\_ADJ}[j] & \text{if apply\_cti} = \text{yes} \\ \text{PHAS}[j] & \text{if apply\_cti} = \text{no,} \end{cases} \quad (760)$$



and the pixel is invalid if

$$\begin{aligned} \beta[j] &= 0 \text{ or} & (761) \\ \text{STATUS}[0] &= 1 \text{ or} & (762) \\ \text{STATUS}[1] &= 1 \text{ or} & (763) \\ \text{STATUS}[2] &= 1 \text{ or} & (764) \\ \text{STATUS}[3] &= 1 \text{ or} & (765) \\ \text{STATUS}[4] &= 1 \text{ or} & (766) \\ \text{STATUS}[11] &= 1 \text{ or} & (767) \\ \text{STATUS}[13] &= 1 \text{ or} & (768) \\ \text{STATUS}[14] &= 1 \text{ or} & (769) \\ \text{STATUS}[15] &= 1 \text{ or} & (770) \\ \text{STATUS}[16] &= 1. & (771) \end{aligned}$$

ii. If

$$\begin{aligned} \text{pix\_adj} &= \text{centroid and} & (772) \\ \text{DATAMODE}_{\text{in}} &= \text{CC33\_FAINT,} & (773) \end{aligned}$$

then

$$\text{TIME} = \text{TIME} + (w'[0] + w'[1] + w'[2] - w'[6] - w'[7] - w'[8]) \times \text{TIMEDEL}_{\text{in}}. \quad (774)$$

Note that it is possible for the centroid algorithm to yield adjustments to `CHIPX_ADJ` and/or `CHIPY_ADJ` that are greater than half a pixel. However, the adjustment cannot equal or exceed one pixel.

(b) edser:

i. If

$$\text{pix\_adj} = \text{edser} \quad (775)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (776)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED or} \quad (777)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (778)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (779)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (780)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT,} \quad (781)$$

then

A. If

$$\text{ENERGY} \neq \text{NaN and} \quad (782)$$

$$\text{ENERGY} > 0, \quad (783)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} + \left( \frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta X[k+1] - \Delta X[k]) + \Delta X[k] \quad (784)$$

and

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} + \left( \frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k] \quad (785)$$

where  $E[k]$  and  $E[k+1]$ ,  $\Delta X[k]$  and  $\Delta X[k+1]$ , and  $\Delta Y[k]$  and  $\Delta Y[k+1]$  are the  $k$  and  $(k+1)^{\text{th}}$  elements of the vector columns  $\text{ENERGY}_{\text{subpix}}$ ,  $\text{CHIPX\_OFFSET}_{\text{subpix}}$ , and  $\text{CHIPY\_OFFSET}_{\text{subpix}}$ , respectively. These columns are in the HDU of the `subpixfile` where the value of the keyword `CCD_ID` is equal to the value of the `CCD_ID` of the event. The appropriate row of these columns is the one where  $\text{FLTGRADE}_{\text{subpix}} = \text{FLTGRADE}$ . The values of  $k$  are the ones where

$$\text{ENERGY} \geq E[k] \text{ and} \quad (786)$$

$$\text{ENERGY} < E[k+1]. \quad (787)$$

Note that if

$$\text{ENERGY} \leq E[0], \quad (788)$$

then  $k = 0$ . Similarly, if

$$\text{ENERGY} \geq E[\text{NPOINTS}_{\text{subpix}} - 2], \quad (789)$$

then  $k = \text{NPOINTS}_{\text{subpix}} - 2$ .

B. If

$$\text{ENERGY} = \text{NaN or} \quad (790)$$

$$\text{ENERGY} \leq 0, \quad (791)$$

then the `CHIPX_ADJ` and `CHIPY_ADJ` coordinates are not modified.

ii. If

$$\text{pix\_adj} = \text{edser} \quad (792)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (793)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (794)$$

then

A. If

$$\text{ENERGY} \neq \text{NaN and} \quad (795)$$

$$\text{ENERGY} > 0, \quad (796)$$

then

$$\text{TIME} = \text{TIME} - \left( \left( \frac{\text{ENERGY} - E[k]}{E[k+1] - E[k]} \right) (\Delta Y[k+1] - \Delta Y[k]) + \Delta Y[k] \right) \times \text{TIMEDR} \quad (797)$$

B. If

$$\text{ENERGY} = \text{NaN or} \quad (798)$$

$$\text{ENERGY} \leq 0, \quad (799)$$

then the `TIME` is not modified.

(c) none:

If

$$\text{pix\_adj} = \text{none}, \quad (800)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} \text{ and} \quad (801)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} \text{ and} \quad (802)$$

$$\text{TIME} = \text{TIME}. \quad (803)$$

No sub-pixel adjustments are applied to the values of `CHIPX_ADJ` and `CHIPY_ADJ` (for timed exposure mode) or `CHIPX_ADJ` and `TIME` (for continuous-clocking mode).

(d) randomize:

i. If

$$\text{pix\_adj} = \text{randomize}, \quad (804)$$

then

$$\text{CHIPX\_ADJ} = \text{CHIPX\_ADJ} + \epsilon_x \text{ and} \quad (805)$$

$$\text{CHIPY\_ADJ} = \text{CHIPY\_ADJ} + \epsilon_y, \quad (806)$$

where  $\epsilon_x$  and  $\epsilon_y$  are a uniform random deviates in the range  $[-0.5, +0.5)$  pixel.

ii. If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (807)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (808)$$

then

$$\text{TIME} = \text{TIME} - \epsilon_y \times \text{TIMEDEL}_{\text{in}}. \quad (809)$$

(e) If

$$\text{CHIPX\_ADJ} < 0.5, \quad (810)$$

then

$$\text{CHIPX\_ADJ} = 1. \quad (811)$$

(f) If

$$\text{CHIPX\_ADJ} \geq 1024.5, \quad (812)$$

then

$$\text{CHIPX\_ADJ} = 1024. \quad (813)$$

(g) If

$$\text{CHIPY\_ADJ} < 0.5, \quad (814)$$

then

$$\text{CHIPY\_ADJ} = 1. \quad (815)$$

(h) If

$$\text{CHIPY\_ADJ} \geq 1024.5, \quad (816)$$

then

$$\text{CHIPY\_ADJ} = 1024. \quad (817)$$

28. X and Y:

(a) If

$$\text{stop} = \text{sky}, \quad (818)$$

then

i. If

$$\text{DATAMODE}_{\text{in}} = \text{FAINT or} \quad (819)$$

$$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS or} \quad (820)$$

$$\text{DATAMODE}_{\text{in}} = \text{GRADED or} \quad (821)$$

$$\text{DATAMODE}_{\text{in}} = \text{VFAINT}, \quad (822)$$

then the values of X and Y are computed using the real-valued coordinates `CHIPX_ADJ` and `CHIPY_ADJ` and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time `TIME`.

ii. If

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (823)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (824)$$

then the values of X and Y are computed using the real-valued coordinates `CHIPX_ADJ` and `CHIPY_TARGeff` and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time `TIME`.

iii. If

$$\text{acaofffile} \neq \text{none} \quad (825)$$

and

$$\text{CONTENT}_{\text{in}} \neq \text{TGEVT1} \quad (826)$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \quad (827)$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \quad (828)$$

then

$$X = \text{NaN and} \quad (829)$$

$$Y = \text{NaN}. \quad (830)$$

iv. If

$$\text{acaofffile} \neq \text{none} \quad (831)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 and} \quad (832)$$

$$\text{CHIPY\_TG} = \text{NaN}, \quad (833)$$

then

$$\text{X} = \text{NaN and} \quad (834)$$

$$\text{Y} = \text{NaN}. \quad (835)$$

29. SKY\_1D:

(a) If

$$\text{stop} = \text{sky} \quad (836)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT or} \quad (837)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED}, \quad (838)$$

then

i. The value of SKY\_1D is computed using the real-valued coordinates CHIPX\_ADJ and CHIPY\_TARG<sub>eff</sub> and the orientation of the telescope (i.e. RA, DEC, and ROLL) at the time TIME.

ii. If

$$\text{acaofffile} \neq \text{none} \quad (839)$$

and

$$\text{CONTENT}_{\text{in}} \neq \text{TGEVT1} \quad (840)$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \quad (841)$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \quad (842)$$

then

$$\text{SKY\_1D} = \text{NaN}. \quad (843)$$

iii. If

$$\text{acaofffile} \neq \text{none} \quad (844)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 and} \quad (845)$$

$$\text{CHIPY\_TG} = \text{NaN}, \quad (846)$$

then

$$\text{SKY\_1D} = \text{NaN}. \quad (847)$$

30. DETX and DETY:

(a) If

$$\text{stop} = \text{det or} \quad (848)$$

$$\text{stop} = \text{tan or} \quad (849)$$

$$\text{stop} = \text{sky,} \quad (850)$$

then

- i. The values of DETX and DETY are computed using the real-valued coordinates CHIPX\_ADJ and CHIPY\_ADJ and the orientation of the SIM (i.e. DY, DZ, and DTHETA) at the time TIME.

ii. If

$$\text{acaofffile} \neq \text{none} \quad (851)$$

and

$$\text{CONTENT}_{\text{in}} \neq \text{TGEVT1} \quad (852)$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \quad (853)$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \quad (854)$$

then

$$\text{DETX} = \text{NaN and} \quad (855)$$

$$\text{DETY} = \text{NaN.} \quad (856)$$

iii. If

$$\text{acaofffile} \neq \text{none} \quad (857)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1 and} \quad (858)$$

$$\text{CHIPY}_{\text{TG}} = \text{NaN,} \quad (859)$$

then

$$\text{DETX} = \text{NaN and} \quad (860)$$

$$\text{DETY} = \text{NaN.} \quad (861)$$

### 31. TDETX and TDETY:

(a) If

$$\text{stop} = \text{tdet or} \quad (862)$$

$$\text{stop} = \text{det or} \quad (863)$$

$$\text{stop} = \text{tan or} \quad (864)$$

$$\text{stop} = \text{sky} \quad (865)$$

then

- i. The values of TDETX and TDETY are computed using the values of nint(CHIPX\_ADJ) and nint(CHIPY\_ADJ). Here, “nint” indicates that the real-valued coordinate is rounded to the nearest integer.

ii. If

$$\text{acaofffile} \neq \text{none} \quad (866)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (867)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (868)$$

and

$$\text{CONTENT}_{\text{in}} \neq \text{TGEVT1} \quad (869)$$

and

$$\text{TIME} < \text{TIME}_{\text{min}} \text{ or} \quad (870)$$

$$\text{TIME} \geq \text{TIME}_{\text{max}}, \quad (871)$$

then

$$\text{TDETX} = \text{NULL} \text{ and} \quad (872)$$

$$\text{TDETY} = \text{NULL}. \quad (873)$$

iii. If

$$\text{acaofffile} \neq \text{none} \quad (874)$$

and

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_FAINT} \text{ or} \quad (875)$$

$$\text{DATAMODE}_{\text{in}} = \text{CC33\_GRADED} \quad (876)$$

and

$$\text{CONTENT}_{\text{in}} = \text{TGEVT1} \text{ and} \quad (877)$$

$$\text{CHIPY\_TG} = \text{NaN}, \quad (878)$$

then

$$\text{TDETX} = \text{NULL} \text{ and} \quad (879)$$

$$\text{TDETY} = \text{NULL}. \quad (880)$$

#### 1.5.4 Write outfile

1. Unexpected CHIPX values:

If the counter associated with equations 202 and 203 is greater than zero, then `acis_process_events` produces a warning message that includes the number of events that have unexpected CHIPX values.

2. Unexpected CHIPY values:

If the counter associated with equations 228 and 229 is greater than zero, then `acis_process_events` produces a warning message that includes the number of events that have unexpected CHIPY values.

3. PIX\_ADJ:

(a) If  $\text{pix\_adj} = \text{centroid}$ , (881)

then

$\text{PIX\_ADJ} = \text{CENTROID}$ . (882)

(b) If

$\text{pix\_adj} = \text{edser}$ , (883)

then

$\text{PIX\_ADJ} = \text{EDSER}$ . (884)

(c) If

$\text{pix\_adj} = \text{none}$ , (885)

then

$\text{PIX\_ADJ} = \text{NONE}$ . (886)

(d) If

$\text{pix\_adj} = \text{randomize}$ , (887)

then

$\text{PIX\_ADJ} = \text{RANDOMIZE}$ . (888)

#### 4. RAND\_SKY:

(a) If

$\text{pix\_adj} = \text{centroid}$ , (889)

then

$\text{RAND\_SKY} = 0.0$ . (890)

(b) If

$\text{pix\_adj} = \text{edser}$ , (891)

then

$\text{RAND\_SKY} = 0.0$ . (892)

(c) If

$\text{pix\_adj} = \text{none}$ , (893)

then

$\text{RAND\_SKY} = 0.0$ . (894)



(d) If  $\text{pix\_adj} = \text{randomize}$ , (895)

then

$\text{RAND\_SKY} = 0.5$ . (896)

5. **TIME\_ADJ**:

(a) Timed-exposure mode:  
If

$\text{DATAMODE}_{\text{in}} = \text{FAINT}$  or (897)

$\text{DATAMODE}_{\text{in}} = \text{FAINT\_BIAS}$  or (898)

$\text{DATAMODE}_{\text{in}} = \text{GRADED}$  or (899)

$\text{DATAMODE}_{\text{in}} = \text{VFAINT}$ , (900)

then

$\text{TIME\_ADJ} = \text{NONE}$ . (901)

(b) Continuous-clocking mode:

i. Set

$\text{TIME\_ADJ} = \text{MIDCHIP}$ . (902)

ii. If

$\text{OBS\_MODE}_{\text{in}} = \text{pointing}$  and (903)

$\text{acaofffile} \neq \text{none}$  (904)

then

$\text{TIME\_ADJ} = \text{TARGET}$ . (905)

iii. If

$\text{OBS\_MODE}_{\text{in}} = \text{pointing}$  and (906)

$\text{CONTENT}_{\text{in}} = \text{TGEVT1}$ , (907)

then

$\text{TIME\_ADJ} = \text{GRATING}$ . (908)

## 2 TBD

- Add the graded mode cti adjustment.
- Include all timed exposure mode processing.
- Should CONTENTs other than EVT0, EVT1, TGEVT1, and EVT2 be included?
- Should CONTENT = EVT2 be dropped?
- Should DATAMODEs other than CC33\_FAINT, CC33\_GRADED, FAINT, FAINT\_BIAS, GRADED, and VFAINT be included?
- Are the  $\beta$  in PHA\_RO the same as the  $\beta$  in PHA?
- Should something be done about SKY\_1D?